中国认可
国际互认
检测
TESTING
CNAS L0310

EMC Test Report

Product Name: **WDM Optical Transmission System**

Product Model: **OptiXtrans E6608**

Report Number: **SYBH(E)07672633EA**

Reliability Laboratory of Huawei Technologies Co., Ltd.

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C
Tel: +86 769 23830808 Fax: +86 769 23837628

Notice

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003.
4. The laboratory has been listed by VCCI to perform electromagnetic emission measurements.
   - The recognition numbers for the test site located in Dongguan are R-20076, G-20075, R-20081, G-20081, C-20057 and T-20053.
   - The recognition numbers for the test site located in Chengdu are R-20096, G-20092, C-20068 and T-20069.
   - The recognition numbers for the test site located in Xi'an are R-20098, G-20094, C-20071 and T-20071.
   - The recognition numbers for the test site located in Shanghai are R-20109, G-20102, R-20108, G-20103, C-20079 and T-20080.
5. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named as “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”; the both names have coexisted since 2009.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. The test report is only valid for the test samples.
9. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
10. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).

Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Product Name:	WDM Optical Transmission System
Product Model:	OptiXtrans E6608

Date of Receipt Sample:	2021-02-01
Start Date of Test:	2021-02-02
End Date of Test:	2021-02-23

Test Result: Pass

Approved by Senior Engineer:	2021-05-11	Zhang Xinghai	Zhang Xinghai
	Date	Name	Signature

Prepared by:	2021-05-10	Liu Baojin	Liu Baojin
	Date	Name	Signature

Modification Record

No.	Last Report No.	Modification Description
1	N/A	First report
2	SYBH(E)06747549EA	Add some new boards and configurations TC5-TC7, refer to section 3.3, 4.3.
3	SYBH(E)06984873EA	Add some new boards and configurations TC8-TC9, refer to section 3.3, 4.3.

Content

1 General Information 6
1.1 Applied Standard 6
1.2 Test Location 6
1.3 Test Environment Condition 6

2 Summary of Test Results 7

3 Equipment Specification 8
3.1 General Description 8
3.2 Specification 8
3.3 Boards and Subassemblies 10

4 System Configuration during EMC Test 13
4.1 Ports and Cables 13
4.2 Auxiliary Equipment 14
4.3 Test Configurations 14
4.4 Test Conditions and Connections 16

5 Immunity Performance Criteria 22
5.1 Performance Criterion A 22
5.2 Performance Criterion B 22
5.3 Performance Criterion C 22

6 Electromagnetic Interference (EMI) 23
6.1 Radiated Emission 30 MHz to 6 GHz 23
6.2 Conducted Emission 0.15 MHz to 30 MHz 26
6.3 Current Harmonics Emissions 28
6.4 Voltage Fluctuations and Flicker 28

7 Electromagnetic Susceptibility (EMS) 29
7.1 Electrostatic Discharge 29
7.2 Immunity to Radiated Electric Fields 80 MHz to 6000 MHz 31
7.3 Immunity to Electrical Fast Transient Bursts 32
7.4 Immunity to Surges 35
7.5 Immunity to Continuous Conducted Interference 0.15 MHz to 80 MHz 38
7.6 Immunity to Power Frequency Magnetic Field 41
7.7 Immunity to Voltage Dips and Short Interruption of AC Power Port 42
7.8 Immunity to Voltage Dips and Short Interruption and Voltage Variation of DC Power Port . 43

8 Main Test Instruments 48

9 System Measurement Uncertainty 50

10 Graph and Data of Emission Test 51
10.1 Radiated Disturbance 51
10.2 Conducted Disturbance 64
10.3 Current Harmonics 83
10.4 Voltage Fluctuation and Flicker 85

11 Photographs of Test Set-up 86
11.1 Emission 86
11.2 Immunity 89

Appendix: Abbreviation 95

1 General Information

1.1 Applied Standard

Applied Product Standard:	EN 55032:2015 EN 55032:2015/A11:2020* CISPR 32:2015 EN 55024:2010 CISPR 24:2010 EN 55024:2010+A1:2015 CISPR 24:2010+A1:2015 EN 55035:2017 CISPR 35:2016 EN 55035:2017/A11:2020* ETSI EN 300 386 V1.6.1:2012 ETSI EN 300 386 V2.1.1:2016 VCCI-CISPR 32:2016 AS/NZS CISPR 32:2015 IEC 61000-3-2:2014/EN 61000-3-2:2014 IEC 61000-3-3:2013/EN 61000-3-3:2013 EN 61000-3-3:2013/AC:2019* IEC 61000-6-2:2005/EN 61000-6-2:2005 IEC 61000-6-4:2006+A1:2010/EN 61000-6-4:2007+A1:2011
Test Method:	IEC 61000-4-2:2008 IEC 61000-4-3:2010 IEC 61000-4-4:2012 IEC 61000-4-5:2014+A1:2017 IEC 61000-4-6:2013 IEC 61000-4-8:2009 IEC 61000-4-11:2004 IEC 61000-4-29:2000

Note: For these standards marked with *, the versions have not been accredited by CNAS.

1.2 Test Location

Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	No.1899, Xiyuan Avenue, Hi-Tech Western District, Chengdu, Sichuan, China
Test Location 2:	Shenzhen Academy of Metrology&Quality Inspection
Address:	Metrology and Quality Inspection Building, Central Section of Longzhu Road, Nanshan District, Shenzhen P.R.C

1.3 Test Environment Condition

Ambient Temperature:	22 °C to 27 °C
Relative Humidity:	45 % to 55 %
Atmospheric Pressure:	95 kPa

2 Summary of Test Results

Table 1 Test summary

EUT Classification:
Telecommunication Centre Equipment

Test Items	Test Configuration	Limit or Performance Criteria		Test Result	Location
Radiated Emissions Enclosure Port	TC1-TC9	Class A		Pass	Location1
Conducted Emissions ☒DC Power Port ☒AC Power Port ☒Wired network Ports	TC1-TC9	Class A		Pass	Location1
Current Harmonics Emissions AC Power Port	TC4,TC8	Class A		Pass	Location1
Voltage Fluctuations and Flickers AC Power Port	TC4,TC8	Refer to section 10.4		Pass	Location1
Electrostatic Discharge Enclosure Port	TC1-TC9	Criterion B		Pass	Location1
Immunity to Radiated Electromagnetic Fields Enclosure Port	TC1-TC9	Criterion A		Pass	Location1
Immunity to Electrical Fast Transient Bursts ☐Outdoor Signal Port ☒Indoor Signal Port ☒AC Power Port ☒DC Power Port	TC1-TC9	Criterion B		Pass	Location1
Immunity to Surges ☐Outdoor Signal Port ☒Indoor Signal Port ☒AC Power Port ☒DC Power Port	TC1-TC9	Criterion B		Pass	Location1
Immunity to Continuous Conducted Interference ☐Outdoor Signal Port ☒Indoor Signal Port ☒AC Power Port ☒DC Power Port	TC1-TC9	Criterion A		Pass	Location1
Immunity to Power Frequency Magnetic Field Enclosure Port	TC1-TC9	Criterion A		Pass	Location2
Immunity to Voltage Dips and Short Interruption AC Power Port	TC4,TC8	Criterion B/C	☐With battery ☒Without battery	Pass	Location1
Immunity to Voltage Dips and Short Interruption and Voltage Variation DC Power Port	TC1-TC9	Criterion A/C	☐With battery ☒Without battery	Pass	Location1

Note:
1. Measurement taken is within the uncertainty of measurement system.
2. TC is short for test configuration
3. ☒ The item has been tested; ☐ The item has not been tested or not applicable.

3 Equipment Specification

3.1 General Description

The OptiXtrans E6608 chassis is a next-generation opical-layer chassis. As Optical Doctor System and Fiber Doctor System, it supports SDH/SONET service, OTN service, packet service, Ethernet service, CPRI service, SAN service, video service and others. The system splits wavelength into DWDM band and CWDM band. System of different types use different bands.

3.2 Specification

Table 2 Main equipment specification

Rated Input Voltage	⎓ -48 V to -60 V ~ 100 V to 240 V (50/60 Hz); HVDC 240V;
Rated Power (W)	1200 W
Dimensions (W x D x H)	442 mm (W) x 224 mm (D) x 88.1 mm (H)
Weight (kg)	5 kg
Frequency of the Internal Source (Hz)	2 kHz, 8 kHz, 2.048 MHz, 19.2 MHz, 25 MHz, 38.88 MHz, 50 MHz, 100 MHz, 155.52 MHz, 156.25 MHz, 312.5 MHz, 313.65 MHz, 50 MHz, 51 MHz, 100 MHz, 108 MHz, 125 MHz, 155.52 MHz, 156.25 MHz, 166.628 MHz, 312.5 MHz, 622.08 MHz, 1.25 GHz, 2.5 GHz, 10.3125 GHz, 25 GHz, 28 GHz, 41.25 GHz, 103.125 GHz

Figure 1. EUT appearance of AC-powered

Figure 2. EUT appearance of DC-powered

3.3 Boards and Subassemblies

Table 3 Board list

Board Name	Description
TMK2UXCL	Universal Cross Connect, System Control and Clock Processing Board
TMB1LDCD	4-channel 100Gbit/s to 2-Channel OTUC2 Service Convergence Wavelength Conversion Board(100G Line Capacity Included, RTU Extension Supported, A24)
TNF2LDX	2*10Gbit/s Wavelength Conversion Board
TMB1EMS10	10-port Gigabit Ethernet Switching Processing Board
TMK1MDCA	2 x 100Gbit/s Or 10 x 10Gbit/s Multi-rate Ports Wavelength Conversion Board(100G Line Capacity Included, RTU Extension Supported)
TNW1AT8	8-Port 2/4 Wire and E&M Processing Board
TNF2ELOM	Enhanced 8 x Multi-rate-Service ports Multiplexing Optical Wavelength Conversion Board(OTU2)
TNF2LQM2	Double 4 x Multi-rate Ports Wavelength Conversion Board,Wind Cooling Mode
TMB1EFS8	8-Port 100M Fast Ethernet Processing Board with LAN Switch
TNW1DXM	DDN Processing Board
TNW1FXSO12	12-Port FXS/FXO Processing Board
TMB1ELOM	Enhanced 8 x Multi-rate-Service ports Multiplexing Optical Wavelength Conversion Board(OTU2)
TMK1TDC	2*100G Tributary Service Processing Board
TMK1UNS5	200G unified line service processing board (including 100G line capacity, supporting RTU extension)
TMK1SLNO	4*STM-16/8*STM-4/8*STM-1-optical interface board
TMB1SL16S	1*STM-16-optical interface board
TMK1EX10	10*10GE (SFP+) Ethernet Processing Board
TNF1SP3DA	42xE1/120ohm(T1/100ohm) Electrical Interface Board
TMB1APIU	AC Power Interface Board
TMB1PIU	Power Interface Board
TMK2FAN	Fan Box
TMB1SBM601	Finished Board, TMB1SBM601,Single-Fiber Bidirectional 6-Channel 12-Wave Mux Unit
TMB1DWS20AFS	PCB, TMB1DWS20AFS,wavelength selective multiplexing and demultiplexing board integrated with XFIU and OA(C-band,6.25GHz flex grid),1*1
TMB2AST201	Finished Board, TMB2AST201,Two-directional optical supervisory channel and timing transmission unit(with OTDR)
TMB1OPM8	Manufactured Board, TMB1OPM8,8-channel Optical Power Monitor Board,1*1
TMB1EX4001	Finished Board, TMB1EX4001,Enhanced 40-Channel Multiplexing/Demultiplexing Board(C_ Even,196.00THz~192.10THz,100GHz,Thermal AWG,LC)
TMB1MD40AFS	Manufactured Board, TMB1MD40AFS,40-Channel Multiplexing & Demultiplexing Board integrated with XFIU and OA(Extended C_even,196.0THz~191.3THz,100GHz)
TMB2SBM3	Manufactured Board, TMB2SBM3,Single-Fiber Bidirectional 3-Channel 6-Wave Mux Unit
TNF2OBU01	Finished Board, TNF2OBU01,C-BAND Optical Amplifier Unit(MAX -3dBm IN and 20dBm OUT,Gain 23dB,With EVOA)

TNF2OBU02	Finished Board, TNF2OBU02,C-BAND Optical Amplifier Unit(MAX -3dBm IN and 20dBm OUT,Gain 23dB,With EVOA)
TNF1OPM801	Finished Board, TNF1OPM801,8-channel Optical Power Monitor Board
TNF1AST4	Finished Board, TNF1AST4,Four-directional optical supervisory channel and timing transmission unit(with Advanced OTDR, with two-diretional pre-fiber spools)(4*1511nm(TX)/1620nm(RX)-155M-150km)
TNF1ST2	TNF1ST2,Bidirectional optical supervisory channel and timing transmission unit,1*1
TMB1DAP	OA base board with 2 pluggable ports
TMB1OLP	Optical Line Protection Unit
TNF1ITL06	Finished Board, TNF1ITL06C,Interleaver Board(C Band),100/50GHz
TNF1TSP	21x E1/T1 Ports&2x STM-1 Ports Access Wavelength Conversion Board(E1/120 ohm T1/100 ohm)
TNW1PF4E8	4x2M Optical Interface,8xE1 Electrical Interface Board
TNF1AUX	Assistant Chanel Inteface Board
TNF1LDCA	2 x 100Gbit/s Or 10 x 10Gbit/s Multi-rate Ports Wavelength Conversion Board(100G line capacity included, RTU Extension Supported)
TNW1PL1	16xE1 Electrical Interface Board
TNW1DIO	Dry Contact 10 Input 4 Output
TMB1AUX	Assistant Chanel Inteface Board
TMB1PL1D	32xE1(75&120ohm)/T1(100ohm) Electrical Interface Board
TNF3ELOM	Enhanced 8 x Multi-rate-Service ports Multiplexing Optical Wavelength Conversion Board(OTU2)
TNF3LDX	2*10Gbit/s Wavelength Conversion Board

Note: TMB1ELOM, TMB1LDX, TMK1SL64S, TMK1SL16Q, TMK1GTA, TMK1TTA and TMK1UNQ2 share the same PCB, and it is decided technically to choose TMB1ELOM to be tested.
TMB1LDCA, TMB1LTX, TMK1MDCA share the same PCB, and it is decided technically to choose TMB1MDCA to be tested.
TMB1LDCD and TMB1LDC share the same PCB, and it is decided technically to choose TMB1LDCD to be tested.
TMK1SLNO, TMB1SL41Q, TMB1SL41O, TMB1SL16S share the same PCB, and it is decided technically to choose TMK1SLNO, TMB1SL16S to be tested.
TMB1EMS10, TMB1EGS4, TMB1EFS8 share the same PCB, and it is decided technically to choose TMB1EMS10 to be tested.
TMB1SBM603, TMB1DPSBM3, TMB1DSBM3, TMB1PSBM6 has same interface and function with TMB1SBM601, so these were not tested.
TMB1EX4002 has same interface and function with TMB1EX4001, so TMB1EX4002 was not test.
TNF1OPM801/TNF1OPM801JP has same interface and function as TMB1OPM8, so this was not tested.
TNF1ST2JP/ TNF1ST2 has same interface and function as TNF1ST2, so this was not tested.
TNF1AST401/ TNF1AST401JP has same interface and function as TNF1ST2, so this was not tested.
TNF2OBU01/ TNF2OBU01JP has same interface and function as TNF2OBU01, so this was not tested.
TNF1ITL06C, TNF1ITL08C, TNF1ITL08, TNF1ITL06, TNF1ITL06JP, TNF1WSMD401, TNF1WSMD401JP, TNF1WSMD9XF, TNF1SCS02, TNF1SCS01, TNF1DFIU03, TNF1DFIU04, TNF1DFIU02, TNF1DFIU01, TNF1DSFIU01, TNF1DSFIU01JP, TNF1DSFIU02, TNF1EMR410, TNF1EMR411, TNF1EMR412, TNF1EMR413, TNF1EMR414, TNF1EMR415, TNF1EMR416, TNF1EMR417, TNF1EMR418, TNF1EMR419, TNF1EMR801, TNF1EMR801JP, TNF1EMR802, TNF1EMR802JP, TNF1EMR803, TNF1EMR803JP, TNF1EMR804, TNF1EMR804JP, TNF1EMR805, TNF1EMR805JP, TNF1EMR2M02, TNF1MR1M01, TNF1MR1M02, TNF1MR1SM01, TNF1MR1SM02, TNF1MR1M01, TNF1MR2M01, TNF1MR2M02, TNF1MR401, TNF1MR402,

TNF1MR410, TNF1MR4S01, TNF1MR4S02, TNF1MR4S03, TNF1MR410JP, TNF1MR411, TNF1MR412, TNF1MR413, TNF1MR414, TNF1MR415, TNF1MR416, TNF1MR417, TNF1MR418, TNF1MR419, TNF1MR801, TNF1MR801JP, TNF1MR802, TNF1MR802JP, TNF1MR803, TNF1MR803JP, TNF1MR804, TNF1MR804JP, TNF1MR805, TNF1MR805JP, TNF1MR806, TNF1MR807, TNF1MR808, TNF1MR809, TNF1MR810, TNF1MR811, TNF1MR812, TNF1MR822, TNF1MR823, TNF1MD801, TNF1MD8M01, TNF1MD8S01, TNF1MD16M01, TNF1DMD2M01, TNF1DMD2SM01, TNF1DMD2M02, TNF1SBM1M03, TNF1SBM2M01, TNF1SBM2M02, TNF1SBM2M03, TNF1SBM2M04, TNF1SBM401, TNF1SBM401JP, TNF1SBM402, TNF1SBM402JP, TNF1SBM403, TNF1SBM404, TNF1SBM801, TNF1SBM803, TNF1SBM803JP, TNF1SBM804, TNF1SBM804JP, TNF1SBM805, TNF1SBM806, TNF1SBM811, TNF1SBM812, TNF1MB1, TNF1MB1JP, TNF1X4001, TNF1X4001JP, TNF1X40-1, TNF1X40JP, TNF1X40, TNF1FIU01, TNF1FIU01JP, TNF1FIU03, TNF2FIU01 have same interface and function with TNF1ITL06, so these were not tested.

Table 4 Subassembly list

Subassembly			
Subassembly Name	Model	Manufacturer	Description
Subrack	TMK2K01AFB	Huawei	Backplane Subrack (shelf, frame), OptiXtrans E6608, TMK2K01AFB, Assembly Chassis(2U, DC)
Subrack	TMK2K02AFB	Huawei	Backplane Subrack (shelf, frame), OptiXtrans E6608, TMK2K02AFB, Assembly Chassis(2U, DC, with fiber storage)
Subrack	TMK2K03AFB	Huawei	Backplane Subrack (shelf, frame), OptiXtrans E6608, TMK2K03AFB, Assembly Chassis(2U, AC)
Subrack	TMK2K04AFB	Huawei	Backplane Subrack (shelf, frame), OptiXtrans E6608, TMK2K04AFB, Assembly Chassis(2U, AC, with fiber storage)
Power	TMB1APIU	VAEPL	AC-DC Power,-40 degC,65degC,90 V, 290 V,53.5 V/28.04 A

4 System Configuration during EMC Test

The Equipment under Test (EUT) functions correctly during all tests. The EUT was installed within the test site and was configured to simulate a typical configuration.

4.1 Ports and Cables

Table 5 Ports and cables

Port	Connector	Board	Length (m)	Qty.	Type of Cable	Remark
AC power port	N/A	TMB1APIU	3 m	2	Unshielded	TC4,TC8
DC power port	N/A	TMB1PIU	3 m	2	Unshielded	TC1-TC7, TC9
ETH	RJ45	TMK2UXCL	10 m	2	Shielded	TC1- TC9
EXT	RJ45	TMK2UXCL	10 m	2	Shielded	Reserved
TX/RX	LC	TMK2UXCL	10 m	2	Fiber	Reserved
USB	N/A	TMK2UXCL	N/A	2	Unshielded	Not uesd
TX/RX	LC	TMB1SL16S	10 m	1	Fiber	TC1
T/R	LC	TMK1EX10	10 m	10	Fiber	TC1
TX/RX	LC	TMK1SLNO	10 m	8	Fiber	TC1
TX/RX	LC	TNF2LQM2	10 m	8	Fiber	TC1
OUT/IN	LC	TNF2LQM2	10 m	2	Fiber	TC1
TX/RX	LC	TMB1EMS10	10 m	10	Fiber	TC1
TX/RX	LC	TMB1ELOM	10 m	8	Fiber	TC1
OUT/IN	LC	TMB1ELOM	10 m	2	Fiber	TC1
T/R	LC	TMK1TDC	10 m	2	Fiber	TC2
T/R	LC	TMK1MDCA	10 m	12	Fiber	TC2
OUT/IN	LC	TMK1MDCA	10 m	1	Fiber	TC2
E1(120 ohm)	Anea96	TMB1TPS	10 m	2	Shielded	TC2
E1(75 ohm)	Anea96	TMB1TPS	10 m	2	Shielded	TC2
T1	Anea96	TMB1TPS	10 m	2	Shielded	TC2
OUT/IN	LC	TMK1UNS5	10 m	1	Fiber	TC2
E&M	RJ45	TNW1AT8	10 m	8	Shielded	TC3
E1(120 ohm)	Anea96	TNW1DXM	10 m	4	Shielded	TC3
E1(75 ohm)	Anea96	TNW1DXM	10 m	4	Shielded	TC3
FXS/O	RJ45	TNW1FXSO12	10 m	12	Shielded	TC3
TX/RX	LC	TNF2LDX	10 m	2	Fiber	TC4
OUT/IN	LC	TNF2LDX	10 m	4	Fiber	TC4
TX/RX	LC	TNF2ELOM	10 m	8	Fiber	TC4
OUT/IN	LC	TNF2ELOM	10 m	2	Fiber	TC4
E1(120 ohm)	Anea96	TNF1SP3DA	10 m	2	Shielded	TC4
E1(75 ohm)	Anea96	TNF1SP3DA	10 m	2	Shielded	TC4
T1	Anea96	TNF1SP3DA	10 m	2	Shielded	TC4
TX/RX	LC	TMB1LDCD	10 m	4	Fiber	TC4
OUT/IN	LC	TMB1LDCD	10 m	2	Fiber	TC4
OUT/IN	LC	TMB2AST2 TMB1MD40AFS TMB1OPM8 TNF2OBU01	10 m	13	Fiber	TC5-TC6
WSC	RJ45	TNF1AST4 TNF1ST2 TMB2AST201	2 m	2	Shielded	TC5-TC6
TX/RX	LC	TNF1AST4 TNF1ST2 TMB1MD40AFS	10 m	13	Fiber	TC5-TC6

TX/RX	LC	TNW1PF4E8	10 m	4	Fiber	TC7
STM-1	LC	TNF1TSP	10 m	1	Fiber	TC7
IN/OUT	LC	TNF1LDCA	10 m	1	Fiber	N/A
TX/RX	LC	TNW1DXM	10 m	13	Fiber	N/A
E1(75 ohm)	Anea96	TNF1TPS TNW1PF4E8	10 m	1	Shielded	TC7
E1(120 ohm)	Anea96	TNF1TPS TNW1PF4E8	10 m	1	Shielded	TC7
T1	Anea96	TNF1TPS TNW1PF4E8	10 m	1	Shielded	TC7
SYNC	RJ45	TNF1AUX	10 m	1	Shielded	TC7
LAMP	RJ45	TNF1AUX	10 m	1	Shielded	Reserved
F1/S1	RJ45	TNF1AUX	10 m	1	Shielded	Reserved
PHONE	RJ45	TNF1AUX	10 m	1	Shielded	TC7
ALMO	RJ45	TNF1AUX	10 m	1	Shielded	TC7
ALMI	RJ45	TNF1AUX	10 m	1	Shielded	TC7
ALMI2/EXT	RJ45	TNF1AUX	10 m	1	Shielded	TC7
TOD	RJ45	TNF1AUX	10 m	2	Shielded	TC7
HP	LC	TMB1AUX	10 m	4	Fiber	TC8
LAMP/PHONE	RJ45	TMB1AUX	10 m	1	Shielded	Reserved
ALMO	RJ45	TMB1AUX	10 m	3	Shielded	TC8
ALMI	RJ45	TMB1AUX	10 m	3	Shielded	TC8
MON	RJ45	TMB1AUX	10 m	1	Shielded	Reserved
CLK	RJ45	TMB1AUX	10 m	3	Shielded	TC8
CLK/TOD	RJ45	TMB1AUX	10 m	3	Shielded	TC8
E1(120 ohm)	Anea 96	TMB1PL1D	10 m	2	Shielded	TC8
E1(75 ohm)	Anea 96	TMB1PL1D	10 m	2	Shielded	TC8
T1	Anea 96	TMB1PL1D	10 m	2	Shielded	TC8
TX/RX	LC	TNF3ELOM	10 m	8	Fiber	TC9
IN/OUT	LC	TNF3ELOM	10 m	2	Fiber	TC9
TX/RX	LC	TNF3LDX	10 m	2	Fiber	TC9
IN/OUT	LC	TNF3LDX	10 m	4	Fiber	TC9
Earth	N/A	N/A	2 m	1	Earthing cable	N/A

4.2 Auxiliary Equipment

Table 6 Auxiliary equipment

Equipment	Model	Manufacturer	S/N	Calibration Date	Calibration Interval (month)
Network Master Pro	MT1100A	Anritsu	A160810612	2020-10-25	12
SDH analyzer	MTS-5800 V2	JDSU	A160415503	2020-10-25	12
Personal Computer	R710	DELL	K3110040064	N/A	N/A

4.3 Test Configurations

The EUT was connected to auxiliary equipment in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).
There were nine test configurations. The test configurations TC1-TC9 were shown in the following table and figures:

Table 7 Test configuration

Configuration No.	Configuration Description

TC1	OptiXtrans E6608, DC Power Supply with TMK2UXCL/TMK2FAN/ TMB1PIU/TMB1SL16S/TMK1EX10/TMK1SLNO/TNF2LQM2/TMB1EMS10/ TMB1ELOM
TC2	OptiXtrans E6608, DC Power Supply with TMK2UXCL/TMK2FAN/ TMB1PIU/TMK1TDC/TMK1MDCA/TMB1TPS/TMK1UNS5
TC3	OptiXtrans E6608, DC Power Supply with TMK2UXCL/TMK2FAN/ TMB1PIU/TNW1DXM/TNW1FXSO12/TNW1AT8
TC4	OptiXtrans E6608, AC&HVDC Power Supply with TMK2UXCL/TMK2FAN/ TMB1APIU/TNF2LDX/TNF2ELOM/TNF1SP3DA/TMB1LDCD
TC5	OptiXtrans E6608, DC Power Supply with TNZ2UXCL / TMB1MD40AFS/TNF1OPM8 / TNF2OBU01/ TNF2OBU02
TC6	OptiXtrans E6608, DC Power Supply with TNF1OPM8 /TMB2SBM3/ TNF1AST4/TNF1ST2/ TNF2OBU01
TC7	OptiXtrans E6608, DC Power Supply with TNF1TSP/ TNW1PF4E8/ TNF1AUX
TC8	OptiXtrans E6608, AC&HVDC Power Supply with TMK2UXCL / TMB1AUX / TMB1PL1D / TMB1APIU / TMB1SL41Q / TMK2FAN
TC9	OptiXtrans E6608, DC Power Supply with TMK2UXCL / TNF3ELOM / TNF3LDX / TMK1UNS5 / TMK1GTA / TMK2FAN / TMB1PIU

<table>
<tr><td>TMK2UXCL</td><td>TMK2UXCL</td><td rowspan="4">TMK2FAN</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TMB1SL16S</td><td>TMK1EX10</td></tr>
<tr><td>TMK1SLNO</td><td>TNF2LQM2</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TMB1EMS10</td><td>TMB1ELOM</td></tr>
</table>

Figure 3. Test configuration1 (TC1)

<table>
<tr><td>TMK2UXCL</td><td>TMK2UXCL</td><td rowspan="4">TMK2FAN</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TMK1TDC</td><td rowspan="2">TMB1TPS</td></tr>
<tr><td rowspan="2">TMK1MDCA</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TMK1UNS5</td></tr>
</table>

Figure 4. Test configuration2 (TC2)

<table>
<tr><td>TMK2UXCL</td><td>TMK2UXCL</td><td rowspan="4">TMK2FAN</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TNW1DXM</td><td>TNW1FXSO12</td></tr>
<tr><td>TNW1AT8</td><td>Blank Panel</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TMK1GTA</td><td>Blank Panel</td></tr>
</table>

Figure 5. Test configuration3 (TC3)

<table>
<tr><td>TMK2UXCL</td><td>TMK2UXCL</td><td rowspan="4">TMK2FAN</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TNF2LDX</td><td>TNF2ELOM</td></tr>
<tr><td rowspan="2">TMB1APIU</td><td>TNF1SP3DA</td><td rowspan="2">TMB1PIU</td></tr>
<tr><td>TMB1LDCD</td></tr>
</table>

Figure 6. Test configuration4 (TC4)

TNZ2UXCL	Blank Panel	TMK2FAN	TMB1PIU
TNF1OPM8	TMB1MD40AFS		
TNF1OBU01	TNF1OBU02		TMB1PIU

Figure 7. Test configuration5 (TC5)

TNZ2UXCL	Blank Panel	TMK2FAN	TMB1PIU
TNF1OPM8	TNF1AST4		
	TNF1ST2		TMB1PIU
TNF1OBU01	TMB2SBM3		

Figure 8. Test configuration6 (TC6)

TMK2UXC	TMK2UXC	TMK2FAN	TMB1PIU
TMB1LDCD	TNF1LDCA		
TMF1AUX			TMB1PIU
TNF1TSP	TNW1PF4E8		

Figure 9. Test configuration7 (TC7)

TMK2UXCL	TMK2UXCL	TMK2FAN	Blank Panel
TMB1AUX	TMB1PL1D		
TMB1APIU	TMB1PL1D		Blank Panel
	TMB1SL41Q		

Figure 10. Test Configuration8 (TC8)

TMK2UXCL	TMK2UXCL	TMK2FAN	TMB1PIU
TNF3ELOM	TNF3ELOM		
TNF3LDX	TNF3LDX		TMB1PIU
TMK1UNS5	TMK1GTA		

Figure 11. Test Configuration9 (TC9)

4.4 Test Conditions and Connections

TC1:
GE: MT1100A<-->TMB1EMS10<-->TMB1ELOM<-->TMK1EX10<-->TNF2LQM2 <--> TMK1EX10<-->TMB1ELOM<--> TMB1EMS10<--> MT1100A
STM-16: MT1100A<-->TMK1SLNO<-->TMK2UXCL<-->TMB1SL16S<-->TMK2UXCL<--> TMK1SLNO <-->MT1100A

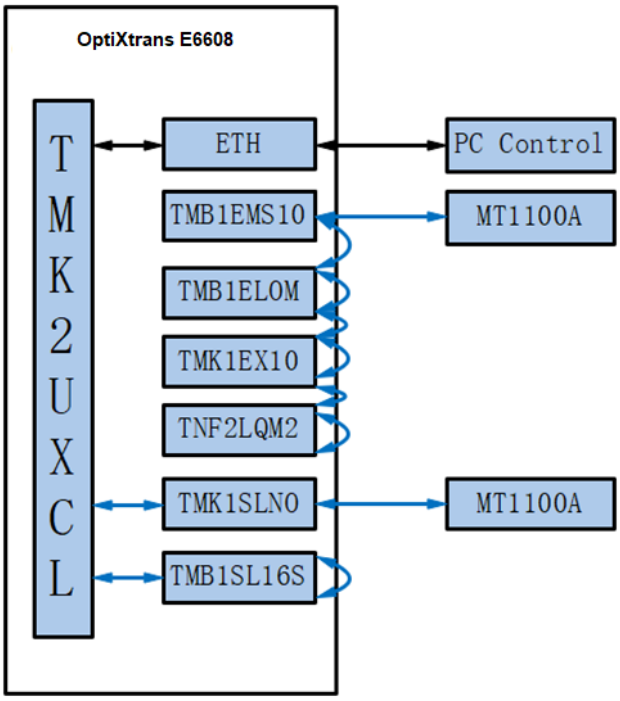

Figure 12. Test connection of TC1

TC2:
10GE:MT1100A<--> TMK1MDCA <-->MT1100A
40GE:MT1100A<-->TMK1MDCA<-->TMK1TDC<-->TMK2UXCL<-->TMK1UNS5<-->TMK2UXCL<--> TMK1TDC<--> MT1100A
TMB1TPS<-->TMB1TPS

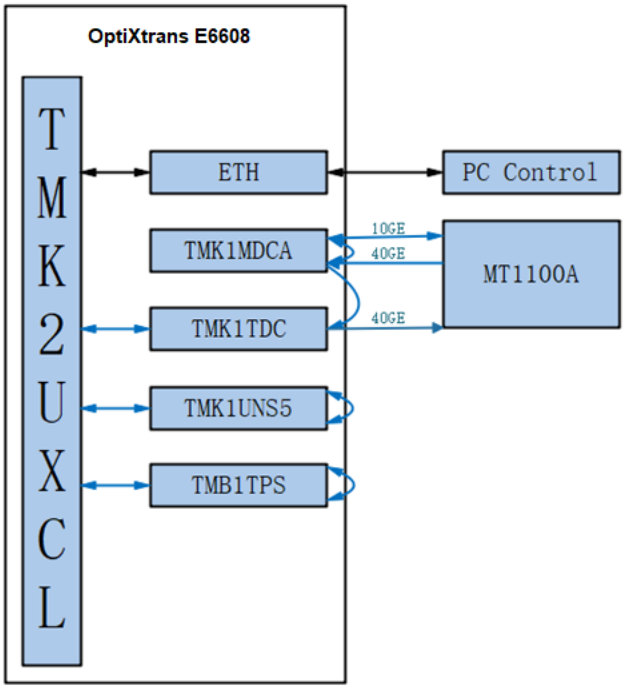

Figure 13. Test connection of TC2

TC3:
DDN: RS232<-->TNW1DXM<--> RS232
A-100<-->TNW1FXSO12<-->TNW1AT8<-->TNW1FXSO12<-->A-100

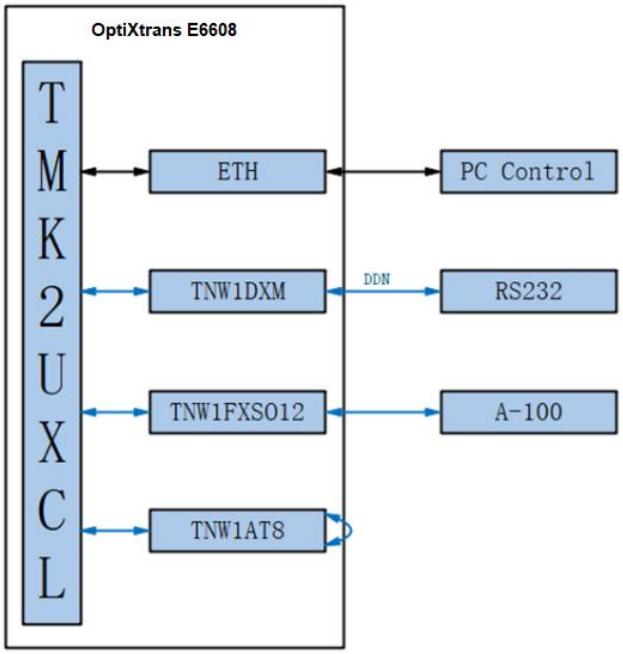

Figure 14. Test connection of TC3

TC4:
10GE: MT1100A<-->TNF2LDX<--> TNF2ELOM<-->TNF2LDX<--> MT1100A
E1: MT1100A<-->TNF3SP3D<--> MT1100A
100GE: MT1100A<-->TMB1LDCD<--> MT1100A

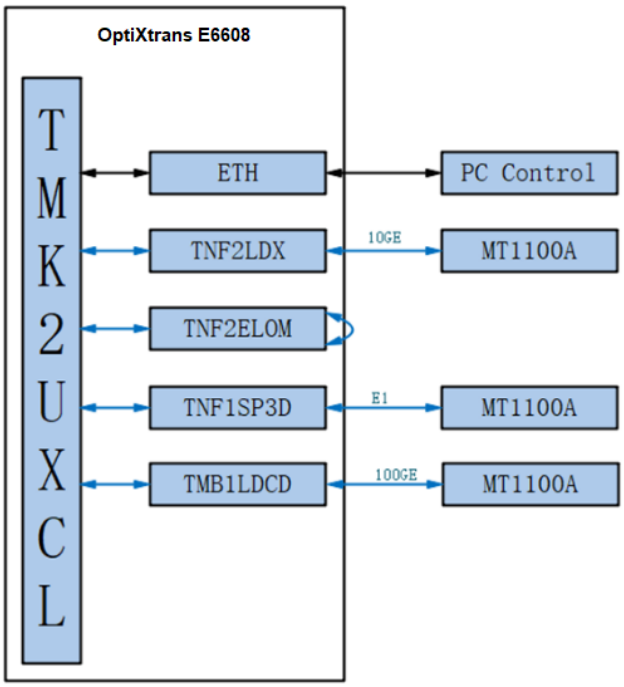

Figure 15. Test connection of TC4

TC5:
Tesgine -> TNF2OBU01 -> TNF2OBU02->TMB1MD40AFS->TNF1OPM8
TMB1MD40AFS -> Tesgine

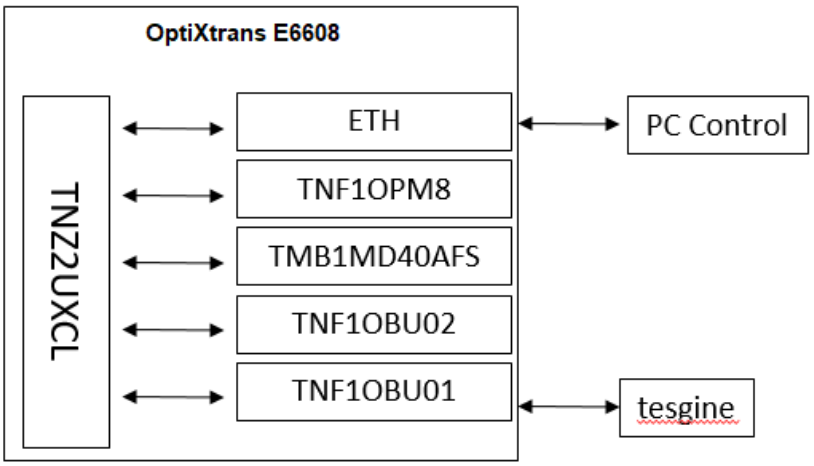

Figure 16. Test connection of TC5

TC6:
Tesgine -> TNF2OBU01 ->TNF1OPM8
TNF1AST4-> TNF1AST4
TNF1ST2-> TNF1ST2
TMB2SBM3<->5800

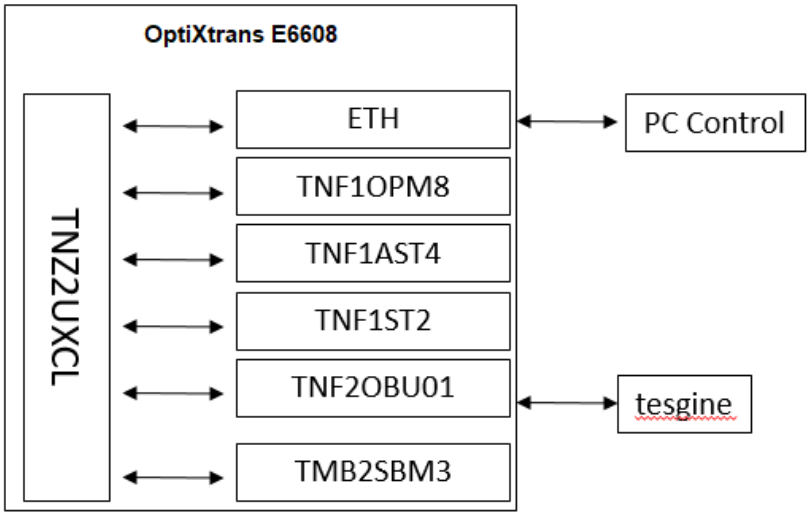

Figure 17. Test connection of TC6

TC7:
100GE:MT1100A <- ->TMB1LDCD<- ->MT1100A
10GE:MT1100A<- ->TNF1LDCA<- ->MT1100A
E1: MT1100A<- ->TNF1TSP<- ->TNW1PF4E8<- ->MT1100A

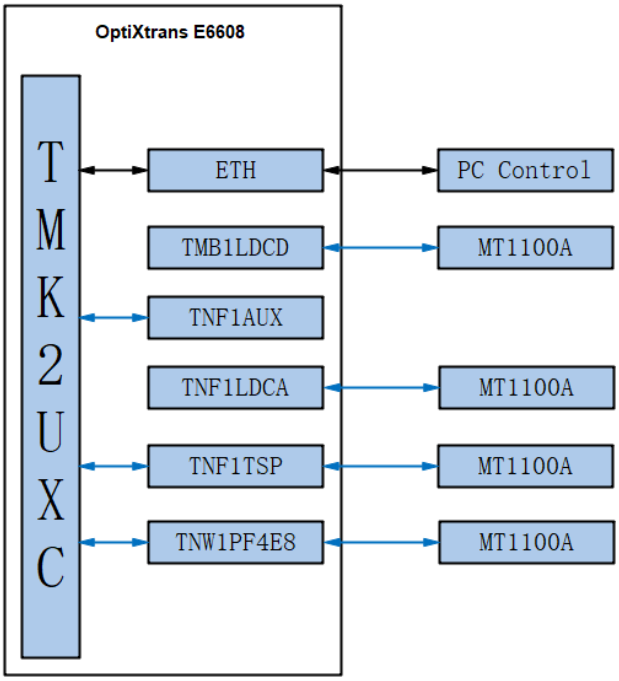

Figure 18. Test connection of TC7

TC8:
STM-4: MTS 5800<-->TMB1SL41Q<-->TMB1PL1D<-->TMB1PL1D<-->LOOPBACK
TMB1AUX<-->XG7050

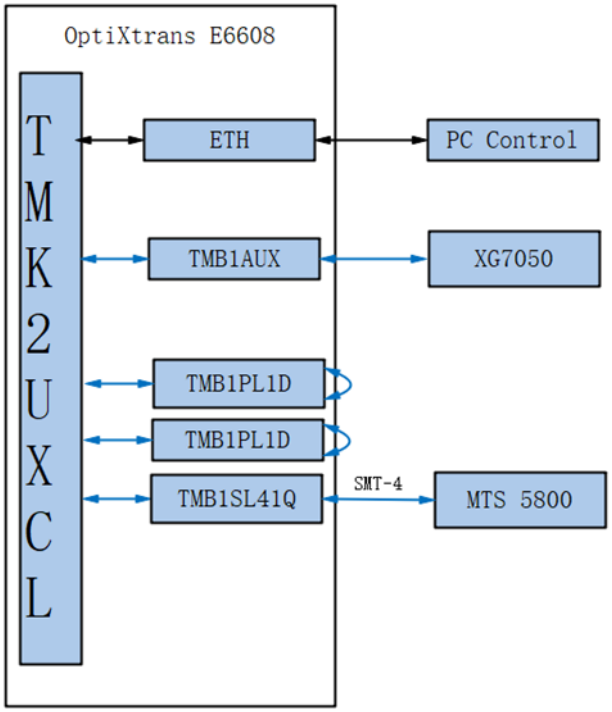

Figure 19. Test connection of TC8

TC9:
10GE: MT1100A<-->TMK1GTA<-->TMK1UNS5<-->TMK1GTA<-->TNF3LDX<-->TNF3LDX<-->TNF3ELOM<-->LOOPBACK
STM-16: MT1100A<-->TNF3ELOM<-->LOOPBACK

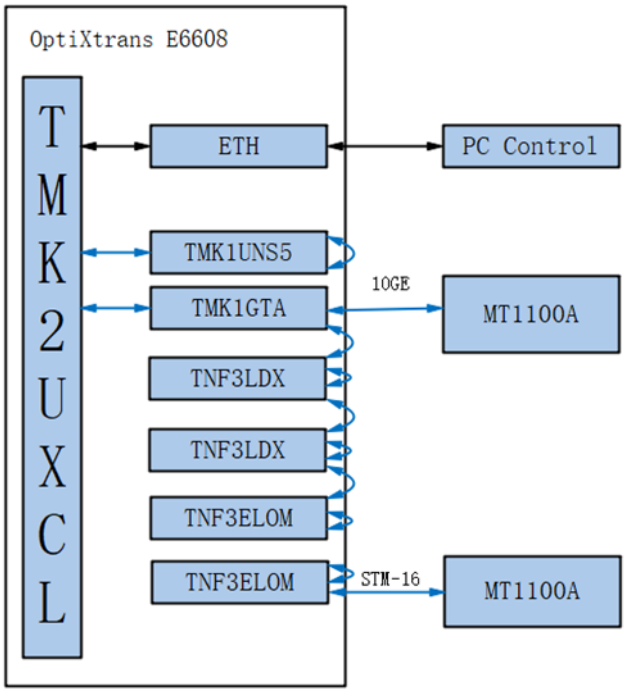

Figure 20. Test connection of TC9

5 Immunity Performance Criteria

During immunity test, the EUT is monitored for compliance against the performance criteria. The "pass / fail" performance criterion to be used during testing is detailed below:

5.1 Performance Criterion A

The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

- The digital ports, including Ethernet, series interfaces, shall be monitored throughout the test period for error frames and lost packets. The established connections shall be maintained throughout testing.
- For series interfaces (synchronous and asynchronous), the established connections shall be maintained throughout testing.
- For all optical ports shall be monitored throughout the test period. The established connections shall be maintained throughout test. And the transfer of information shall be without any bit errors during the exposure.

5.2 Performance Criterion B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the exposure to an electromagnetic phenomenon, degradation of performance is, however, allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

The apparatus shall continue to operate as intended after the test. Degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.

- For all optical ports, the loss of frame alignment and loss of signal are not allowed. SDH channel recover automatically after testing.
- For digital ports, including Ethernet, series interfaces (synchronous and asynchronous), and the established connections shall be maintained throughout testing. The EUT shall recover automatically to normal performance after the cessation of the exposure.

This performance does not apply to surge testing where some loss of frame alignment may be expected. For this test, the EUTshall operate as intended following the cessation of the exposure.

5.3 Performance Criterion C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or, in the case of switching equipment, by normal subsequent use.

6 Electromagnetic Interference (EMI)

6.1 Radiated Emission 30 MHz to 6 GHz

6.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB in accordance with the standard CISPR 16-1-4. The test distance was 3 m for 30 MHz to 1 GHz.
The test site full-anechoic chamber has met the requirement of S_{VSWR} tolerance 6 dB in accordance with the standard CISPR 16-1-4. The test distance was 3 m for 1 GHz to 6 GHz.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 6 GHz by using test software script; the emissions were measured using Quasi-Peak Detector (30 MHz to 1 GHz) and Average/Peak Detector (above 1 GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software set-up. Normally, the antenna height ranged from 1 m to 4 m, and the turntable azimuth ranged from 0°to 360°, The receive antenna has two polarizations: Vertical and Horizontal.

The set-up and test methods were in accordance with EN 55032/CISPR 32 standards. The test set-up diagram is shown as below:

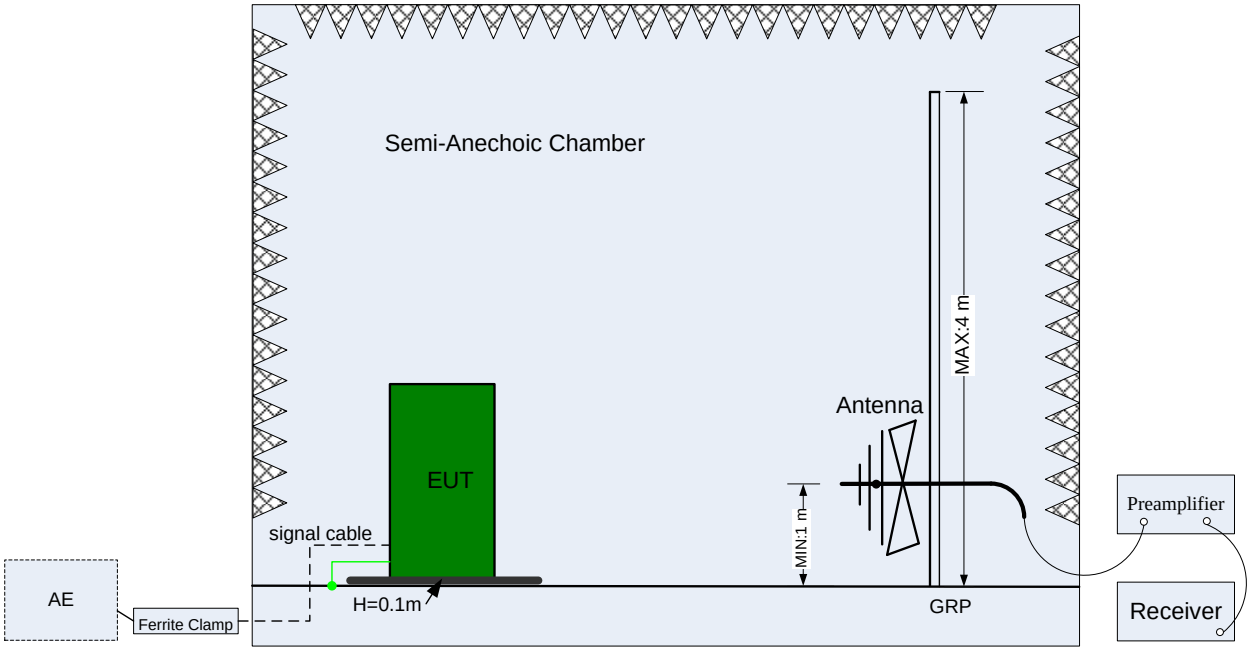

Figure 21. Test set-up of radiated disturbance (30 MHz to 1 GHz)

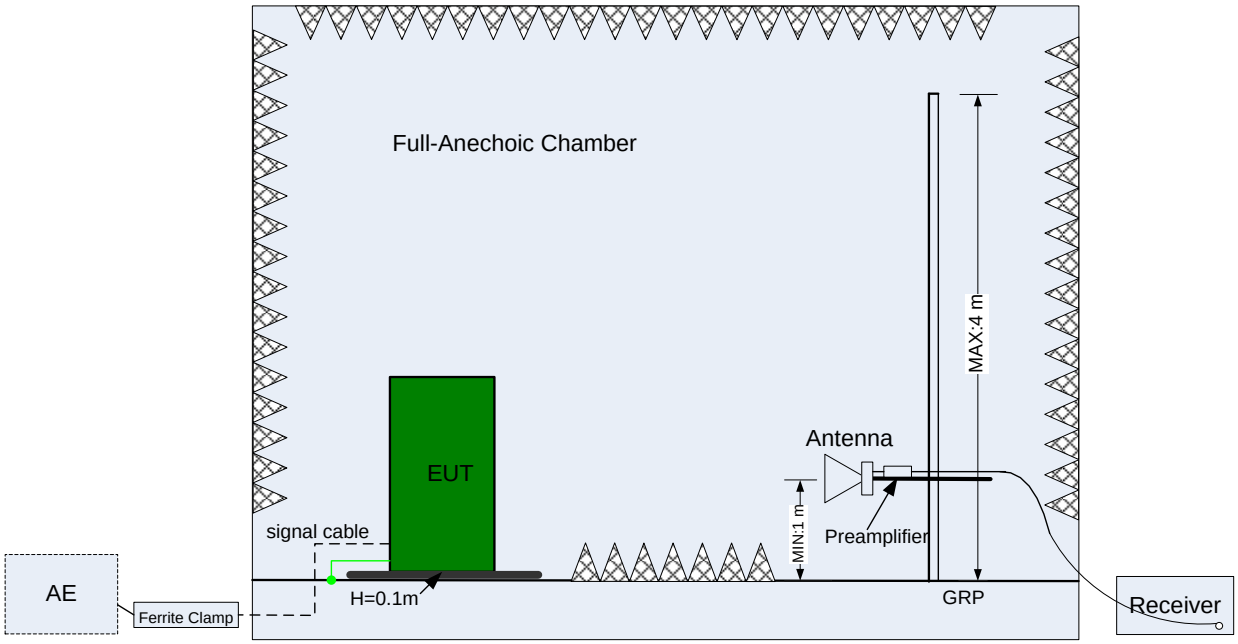

Figure 22. Test set-up of radiated disturbance (above 1 GHz)

6.1.2 Test Limit

Table 8 Test limits of 30 MHz to 1 GHz at a measuring distance of 3 m

Class A	
Frequency	Limit
30 MHz to 230 MHz	50 dBμV/m
230 MHz to 1 GHz	57 dBμV/m
Class B	
Frequency	Limit
30 MHz to 230 MHz	40 dBμV/m
230 MHz to 1 GHz	47 dBμV/m

Table 9 Test limits of 30 MHz to 1 GHz at a measuring distance of 10 m

Class A	
Frequency	Limit
30 MHz to 230 MHz	40 dBμV/m
230 MHz to 1 GHz	47 dBμV/m
Class B	
Frequency	Limit
30 MHz to 230 MHz	30 dBμV/m
230 MHz to 1 GHz	37 dBμV/m

Table 10

Table 11 Test limits of 1 GHz to 6 GHz at a measuring distance of 3 m

Class A		
Frequency	AV	PK
1 GHz to 3 GHz	56 dBμV/m	76 dBμV/m
3 GHz to 6 GHz	60 dBμV/m	80 dBμV/m
Class B		
Frequency	AV	PK
1 GHz to 3 GHz	50 dBμV/m	70 dBμV/m
3 GHz to 6 GHz	54 dBμV/m	74 dBμV/m

6.1.3 Test Results

The EUT has met the requirements for radiated emission of the enclosure port.

For the test data, see section 10.1.

Table 12 Test Result

Test Configuration	Frequency Range	Distance(m)	Limit	Result
TC1-TC9	30 MHz to 1 GHz	3 m	Class A	Pass
TC1-TC9	1 GHz to 6 GHz	3 m	Class A	Pass

Note: The highest frequency of the internal sources of the EUT is 103.125 GHz; the measurement was made up to 6 GHz.

6.2 Conducted Emission 0.15 MHz to 30 MHz

6.2.1 Test Procedure

The EUT was configured as described in section 4. The mains cable of the EUT must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the LISN.

All wired network and signal ports must be correctly terminated using either appropriate associated equipment or a representative termination during the measurement of the conducted disturbances at the mains.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

The set-up of conducted disturbance for wired network port and power ports were in accordance with EN 55032/CISPR 32 standards. The test set-up diagram is shown as below:

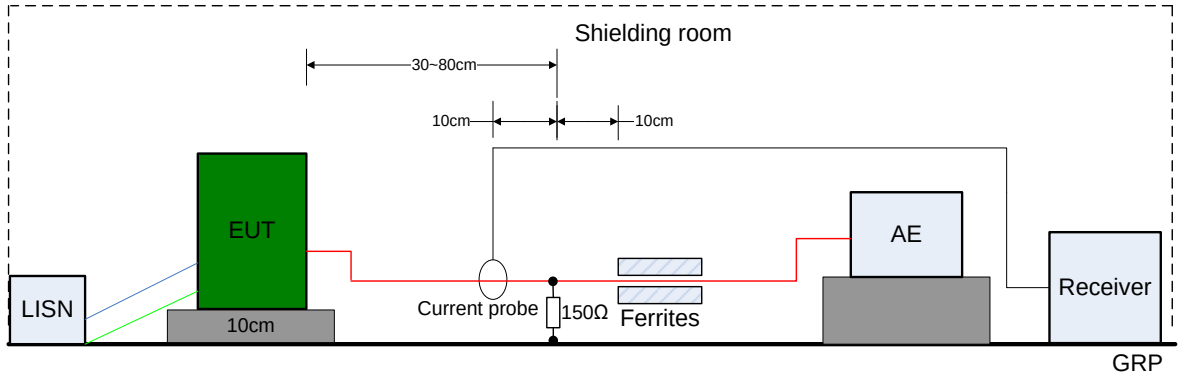

Note: The 150 Ω resistance was connected to the outside surface of the shield.

Figure 23. Test set-up of conducted disturbance for wired network port (shielded cable)

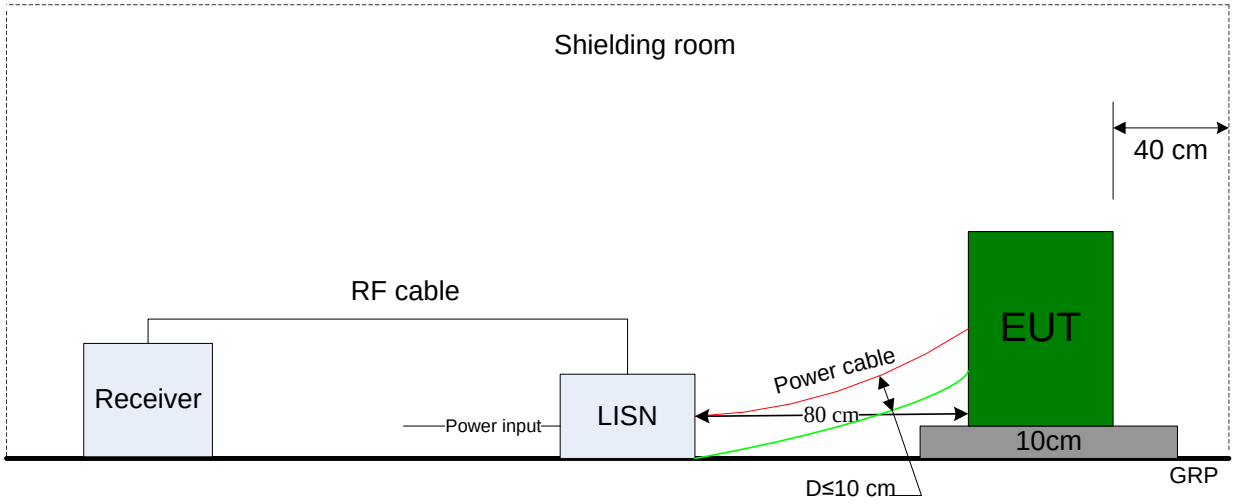

Figure 24. Test set-up of conducted disturbance for power port

6.2.2 Test Limit

Table 13 Limits of wired network ports

Class A				
Frequency	Voltage limits (dBμV)		Current limits (dBμA)	
	QP	AV	QP	AV
0.15 MHz to 0.5 MHz	97 to 87	84 to 74	53 to 43	40 to 30
0.5 MHz to 30 MHz	87	74	43	30

Table 14 Limits of DC&AC power port

Class A		
Frequency	Voltage limits (dBμV)	
	QP	AV
0.15 MHz to 0.5 MHz	79	66
0.5 MHz to 30 MHz	73	60

6.2.3 Test Results

The EUT has met requirements for conducted disturbance.
For the test data, see section 10.2.

Table 15 Test result of conducted disturbance

Test Configuration	Ports	Cable Type	Sampling Network	Limit	Result
TC1-TC7,TC9	DC	N/A	ENV4200	Class A	Pass
TC4,TC8	AC	N/A	ENV4200	Class A	Pass
TC1-TC9	ETH	Shielded	Current Probe	Class A	Pass
TC2-TC4, TC7,TC8	E1(120ohm)	Shielded	Current Probe	Class A	Pass
TC2-TC4, TC7,TC8	E1(75ohm)	Shielded	Current Probe	Class A	Pass
TC2, TC4, TC7, TC8	T1	Shielded	Current Probe	Class A	Pass
TC3	E&M	Shielded	Current Probe	Class A	Pass
TC3	FXS/O	Shielded	Current Probe	Class A	Pass
TC5,TC6	WSC	Shielded	Current Probe	Class A	Pass
TC7,TC8	ALMO	Shielded	Current Probe	Class A	Pass
TC7,TC8	ALMI	Shielded	Current Probe	Class A	Pass
TC7,TC8	TOD	Shielded	Current Probe	Class A	Pass
TC7	SYNC	Shielded	Current Probe	Class A	Pass
TC7	PHONE	Shielded	Current Probe	Class A	Pass
TC8	MON	Shielded	Current Probe	Class A	Pass
TC8	CLK	Shielded	Current Probe	Class A	Pass

6.3 Current Harmonics Emissions

6.3.1 Test Procedure

The EUT is to be powered from a clean (low distortion) 230 V, 50 Hz AC power source. The EUT was configured as described in section 4. The set-up and test methods were in accordance with EN 61000-3-2/IEC 61000-3-2 standards.



Figure 25. Test set-up of current harmonics emission test

6.3.2 Test Results

The EUT has met the requirements (Class A) specified in EN 61000-3-2/IEC 61000-3-2 for current harmonics emission of AC power port.

For the test data, see section 10.3.

6.4 Voltage Fluctuations and Flicker

6.4.1 Test Procedure

The EUT is to be powered from a clean (low distortion) 230 V, 50 Hz AC power source. The EUT was configured as described in section 4. The formal test ran a period of 2 hours. P_{lt}, P_{st}, d(t), d_{max} and d_c is measured. The set-up and test methods were in accordance with EN 61000-3-3/IEC 61000-3-3 standards.



Figure 26. Test set-up of voltage fluctuations test

6.4.2 Test Results

The EUT has met the requirements of EN 61000-3-3/IEC 61000-3-3 for voltage fluctuations and flicker of AC power port.

For the test data, see section 10.4.

7 Electromagnetic Susceptibility (EMS)

7.1 Electrostatic Discharge

7.1.1 Test Procedure

The EUT was configured as described in section 4. The set-up and test methods were in accordance with IEC 61000-4-2 standard.

The test environment condition was recorded in the following table.

Table 16 Test environment condition during ESD test

Ambient temperature	25 °C
Relative humidity	50 %
Atmospheric pressure	95 kPa

The test set-up diagram is shown as below:

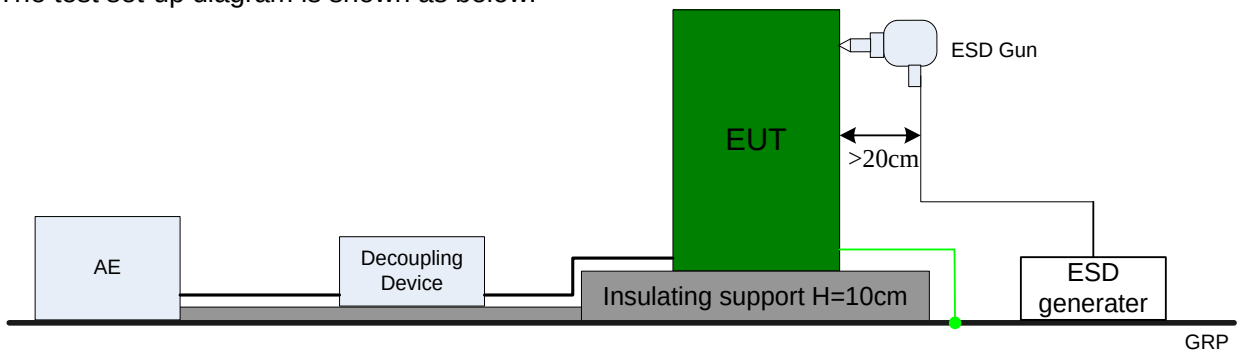

Figure 27. Test set-up of electrostatic discharge

7.1.2 Test Results

The EUT has met the requirements of Performance Criterion B defined in section 5.
All of the discharge points were presented in the table below. Each discharge point was tested 20 times (10 times respectively for positive and negative), and the minimum discharge interval was 1 second.

Table 17 Test results

Test Point	Discharge Mode	Test Level (kV)	Performance Criterion	Description	Result
Vertical coupling plane-front	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Vertical coupling plane-rear	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Vertical coupling plane-left	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Vertical coupling plane-right	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Rack enclosure	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Connectors	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Screw of frames	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Board panels	C	±2, ±4, ±6, ±8	Criterion B	No failure detected	Pass
Board gap	A	±2, ±4, ±8, ±15	Criterion B	No failure detected	Pass

Radiator hole	A	±2, ±4, ±8, ±15	Criterion B	No failure detected	Pass
Indication lamp	A	±2, ±4, ±8, ±15	Criterion B	No failure detected	Pass

Note: The discharge mode: “C” means Contact Discharge, “A” means Air Discharge

7.2 Immunity to Radiated Electric Fields 80 MHz to 6000 MHz

7.2.1 Test Procedure

The EUT was configured as described in section 4. The set-up and test methods were in accordance with IEC 61000-4-3 standard. All sides of the EUT (front, rear, left and right) were tested using an antenna with vertical and horizontal polarization.

Table 18 Test requirements

Test Side of EUT	Front, rear, left and right
Field Modulation	80% amplitude modulation at 1 kHz sine wave
Maximum Step Size	1%
Swept-Frequency Dwell Time	1 second
Special Frequency points	80 MHz, 120 MHz, 160 MHz; 230 MHz; 434 MHz; 460 MHz; 600 MHz; 863 MHz; 900 MHz 1800 MHz; 2600 MHz; 3500 MHz; 5000 MHz (±1%).100 MHz; 155.52 MHz; 156.25 MHz; 312.5 MHz; 313.65 MHz; 50 MHz; 51 MHz; 100 MHz; 108 MHz; 125 MHz; 155.52 MHz; 156.25 MHz; 166.628 MHz; 312.5 MHz; 622.08 MHz; 1.25 GHz; 2.5 GHz;
Special Frequency Dwell Time	60 seconds

The test set-up diagram is shown as below:

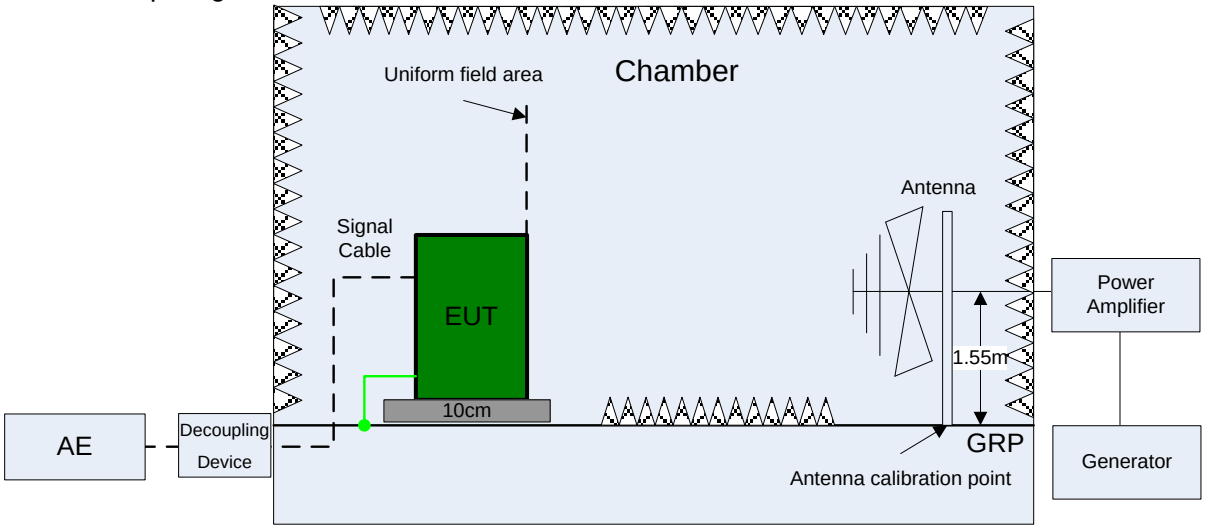

Note: When performing the test above 1.0 GHz, the Horn Antenna will be used.

Figure 28. Test set-up of immunity to radiated electric fields

7.2.2 Test Results

The EUT has met the requirements of Performance Criterion A defined in section 5 for Immunity to radiated electromagnetic fields of enclosure port.

Table 19 Test results

Frequency Range	Polarization	Test Level (Unmodulated, rms)	Performance Criterion	Description	Result
80 MHz to 1000 MHz	Horizontal and Vertical	10 V/m (rms)	Criterion A	No failure detected	Pass
1000 MHz to 6000 MHz	Horizontal and Vertical	10 V/m (rms)	Criterion A	No failure detected	Pass

7.3 Immunity to Electrical Fast Transient Bursts

7.3.1 Test Procedure

The EUT was configured as described in section 4. A series of fast transient bursts meeting the specification were applied for a period of 120 seconds. The transient bursts were applied for both Positive and Negative Burst Trains to each type of signal port and power port. The set-up and test methods were in accordance with IEC 61000-4-4 standard.

Table 20 Parameter for single pulse and fast transient /burst

Rise Time of Single Pulse (Tr)	5 ns
Duration of Single Pulse (Th)	50 ns
Pulse Repetition Rate/ Burst Duration	5 kHz/15 ms
Burst Period	300 ms

The test set-up diagram is shown as below:

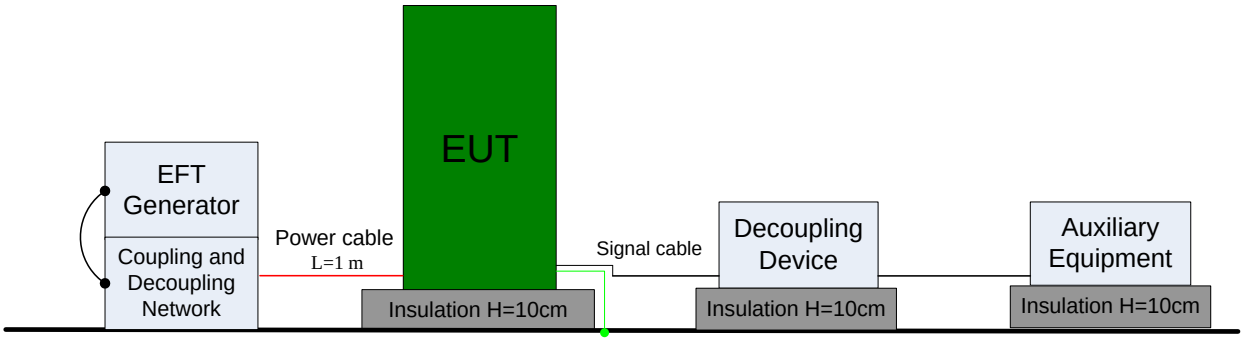

Figure 29. Test set-up of electrical fast transient bursts for power port of equipment with elevated cable entries

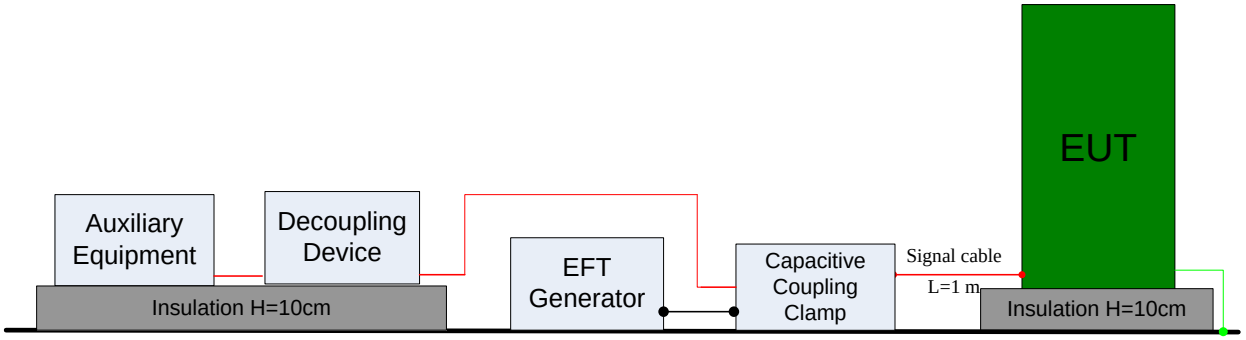

Figure 30. Test set-up of electrical fast transient bursts for signal port of equipment with elevated cable entries

7.3.2 Test Results

The EUT has met the requirements of Performance Criterion B defined in section 5.

Table 21 Test results

Ports	Coupling Mode	Test Level	Duration	Performance Criterion	Description	Result
AC	L	±2 kV	2 minutes	Criterion B	No failure detected	Pass
AC	N	±2 kV	2 minutes	Criterion B	No failure detected	Pass
AC	PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
AC	L+N	±2 kV	2 minutes	Criterion B	No failure detected	Pass
AC	L+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
AC	N+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
AC	L+N+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	240V(+)	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	240V(-)	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	240V(+)+240V(-)	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	240V(+)+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	240V(-)+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	240V(+)+240V(-)+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	-48V	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	RTN	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	-48V+RTN	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	RTN+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	-48V+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
DC	-48V+RTN+PE	±2 kV	2 minutes	Criterion B	No failure detected	Pass
ETH	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
E1(120ohm)	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
E1(75ohm)	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass

T1	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
E&M	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
FXS/O	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
WSC	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
ALMO	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
ALMI	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
TOD	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
SYNC	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
PHONE	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
CLK	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass
MON	Coupling clamp	±2 kV	2 minutes	Criterion B	No failure detected	Pass

Note: RTN is short for return lead.

7.4 Immunity to Surges

7.4.1 Test Procedure

The EUT was configured as described in section 4. The set-up and test methods were in accordance with IEC 61000-4-5 standard.
The test set-up diagram is shown as below:

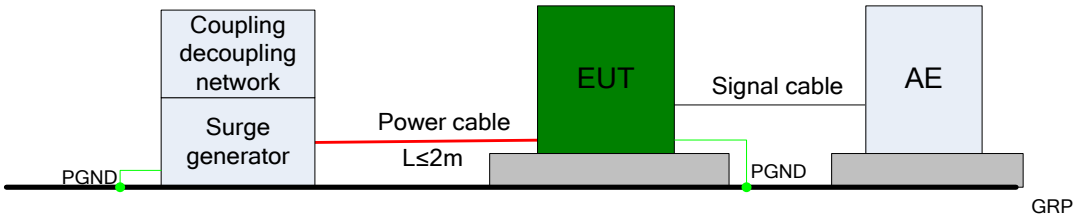

Figure 31. Test set-up of immunity to surge for power port

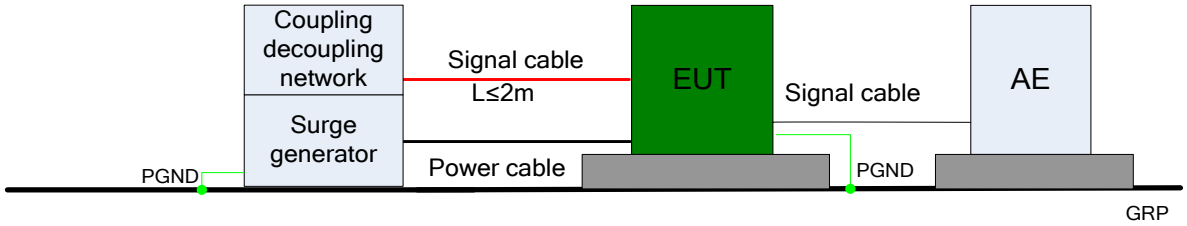

Figure 32. Test set-up of immunity to surge for signal port

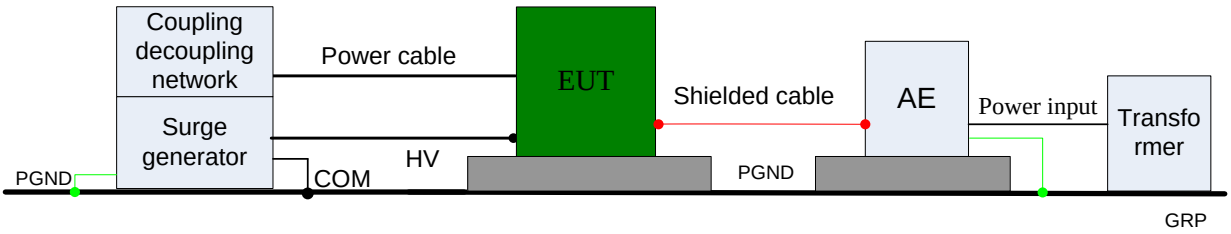

Figure 33. Test set-up of immunity to surge for signal port (shield to ground)

7.4.2 Test Results

The EUT has met the requirements of Performance Criterion B defined in section 5.

Table 22 Test results

Ports	Waveform (μs)	Coupling Mode	Coupling Impedance (ohm)	Phase	Test Level	Rep Times	Description	Result
AC	1.2/50	L-N	2	0°, 90°, 180°, 270°	±2 kV	5	No failure detected	Pass
AC	1.2/50	L-PE	12	0°, 90°, 180°, 270°	±4 kV	5	No failure detected	Pass
AC	1.2/50	N-PE	12	0°, 90°, 180°, 270°	±4 kV	5	No failure detected	Pass

AC	1.2/50	L+N-PE	12	0°, 90°, 180°, 270°	±4 kV	5	No failure detected	Pass
DC	1.2/50	240V(+) to 240V(-)	2	Asyn	±2 kV	5	No failure detected	Pass
DC	1.2/50	240V(+) to ground	12	Asyn	±4 kV	5	No failure detected	Pass
DC	1.2/50	240V(-) to ground	12	Asyn	±4 kV	5	No failure detected	Pass
DC	1.2/50	240V(+)+ 240V(-) to ground	12	Asyn	±4 kV	5	No failure detected	Pass
DC	1.2/50	-48V to RTN	2	Asyn	±2 kV	5	No failure detected	Pass
DC	1.2/50	-48V to ground	12	Asyn	±4 kV	5	No failure detected	Pass
DC	1.2/50	RTN to ground	12	Asyn	±4 kV	5	No failure detected	Pass
DC	1.2/50	-48V+RTN to ground	12	Asyn	±4 kV	5	No failure detected	Pass
ETH	1.2/50	Line to ground	42	Asyn	±4 kV	5	No failure detected	Pass
ETH	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
E1(120ohm)	1.2/50	Line to ground	42	Asyn	±2 kV	5	No failure detected	Pass
E1(120ohm)	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
E1(75ohm)/T1	1.2/50	Line to Line	42	Asyn	±2 kV	5	No failure detected	Pass
E1(75ohm)/T1	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
T1	1.2/50	Line to ground	42	Asyn	±2 kV	5	No failure detected	Pass
T1	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
E&M	1.2/50	Line to ground	42	Asyn	±2 kV	5	No failure detected	Pass
E&M	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
FXS/O	1.2/50	Line to ground	42	Asyn	±2 kV	5	No failure detected	Pass
FXS/O	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
WSC	1.2/50	Line to ground	42	Asyn	±1 kV	5	No failure detected	Pass
WSC	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
ALMO	1.2/50	Line to ground	42	Asyn	±1 kV	5	No failure detected	Pass
ALMO	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
ALMI	1.2/50	Line to	42	Asyn	±1 kV	5	No failure	Pass

		ground					detected	
ALMI	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
TOD	1.2/50	Line to ground	42	Asyn	±1 kV	5	No failure detected	Pass
TOD	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
SYNC	1.2/50	Line to ground	42	Asyn	±1 kV	5	No failure detected	Pass
SYNC	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
PHONE	1.2/50	Line to ground	42	Asyn	±1 kV	5	No failure detected	Pass
PHONE	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
MON	1.2/50	Line to ground	42	Asyn	±1 kV	5	No failure detected	Pass
MON	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass
CLK	1.2/50	Line to ground	42	Asyn	±4 kV	5	No failure detected	Pass
CLK	1.2/50	Shield to ground	2	Asyn	±0.5 kV	5	No failure detected	Pass

Note: RTN is short for return lead.

7.5 Immunity to Continuous Conducted Interference 0.15 MHz to 80 MHz

7.5.1 Test Procedure

The EUT was configured as described in section 4. The applied level was amplitude modulated by a 1 kHz sinusoidal signal to a modulation depth of 80%. The set-up and test methods were in accordance with IEC 61000-4-6 standard.

Table 23 Test requirements

Sweep Frequency Range	0.15 MHz to 80 MHz
Field Modulation	80% amplitude modulation at 1kHz sine wave
Maximum Step Size	1%
Swept-Frequency Dwell Time	1 second
Special Frequency points	0.2 MHz; 1.0 MHz; 7.1 MHz; 13.56 MHz; 21.0 MHz; 27.12 MHz; 40.68 MHz (±1%); 2.048 MHz, 19.2 MHz, 25 MHz, 38.88 MHz, 50 MHz
Special Frequency Dwell Time	60 seconds

The test set-up diagram is shown as below:

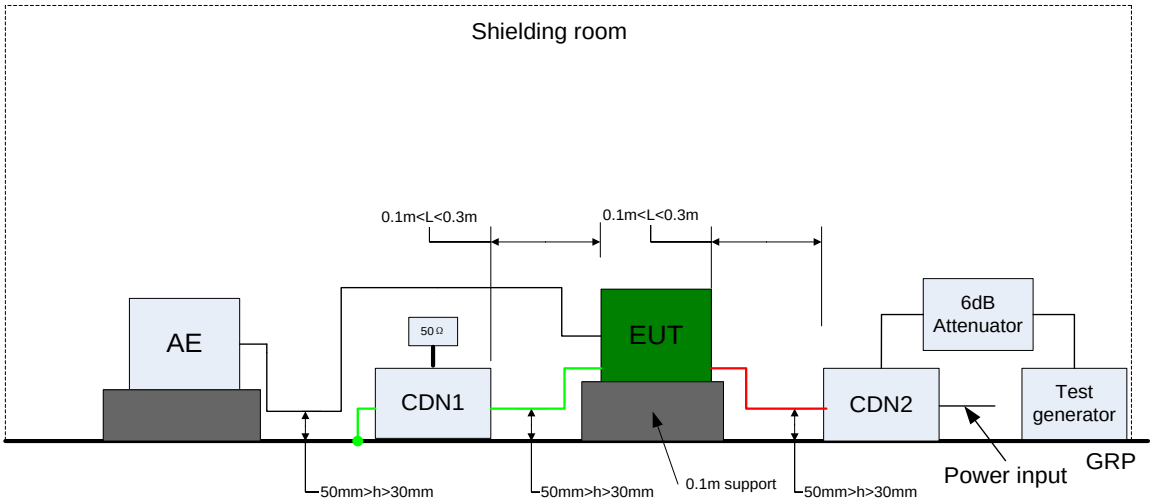

The cable connected to the EUT: red is power cable; green is earthing cable; black is signal cable

Figure 34. Test set-up of immunity to continuous conducted interference for power port

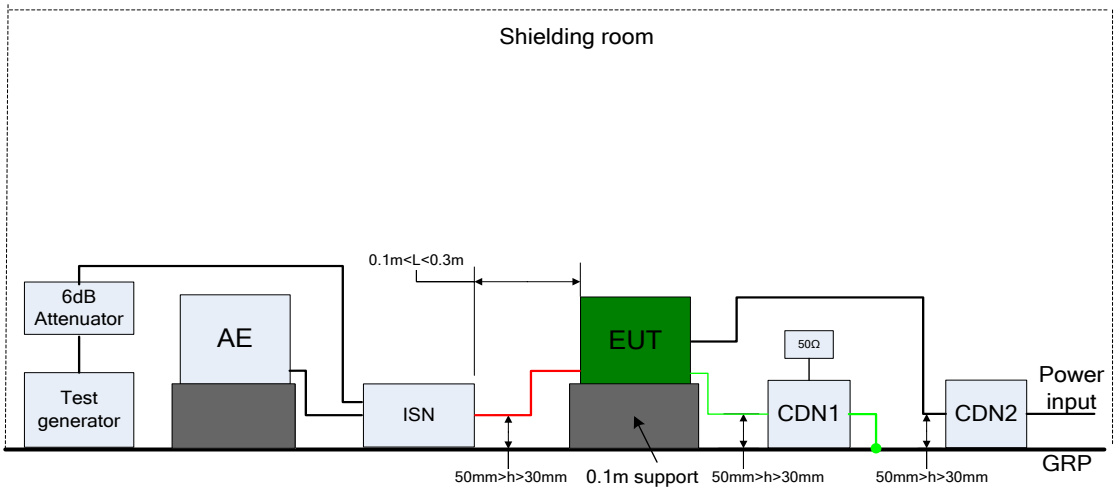

The cable connected to the EUT: red is screened signal cable; green is earth cable; black is power cable

Figure 35. Test set-up of immunity to continuous conducted interference for shielded cable

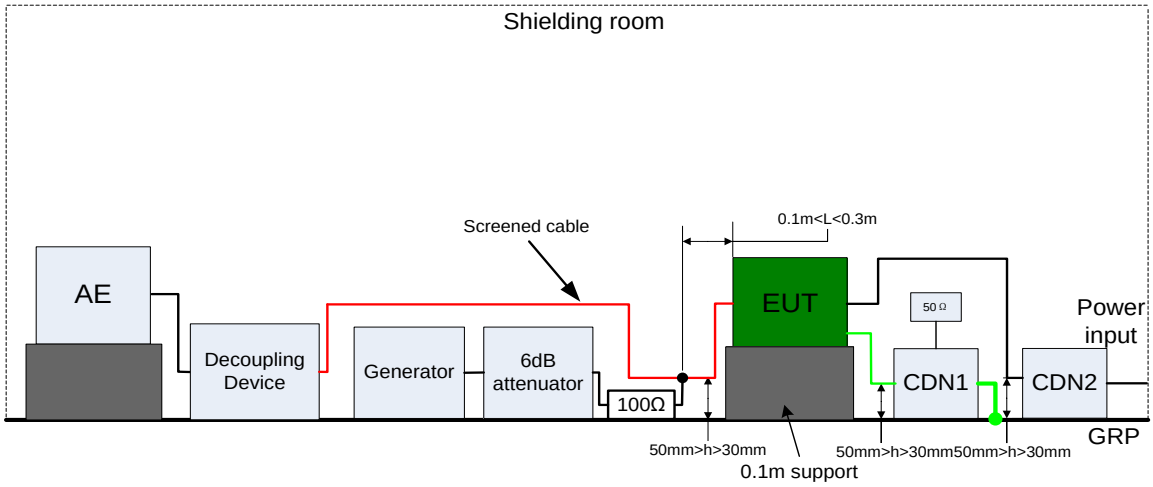

The cable connected to the EUT: red is screened signal cable; green is earth cable; black is power cable

Figure 36. Test set-up of immunity to continuous conducted interference for shielded cable

7.5.2 Test Results

The EUT has met the requirements of Performance Criterion A defined in section 5.

Table 24 Test results of signal ports

Port	Cable Type	Test Level (Unmodulated)	Coupling Method	Description	Conclusion
ETH	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
E1(120ohm)	Shielded	10 V (rms)	Direct inject	No failure detected	Pass
E1(75ohm)	Shielded	10 V (rms)	Direct inject	No failure detected	Pass
T1	Shielded	10 V (rms)	Direct inject	No failure detected	Pass
E&M	Shielded	10 V (rms)	Direct inject	No failure detected	Pass
FXS/O	Shielded	10 V (rms)	Direct inject	No failure detected	Pass
WSC	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
SYNC	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
PHONE	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
ALMO	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
ALMI	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
TOD	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
MON	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass
CLK	Shielded	10 V (rms)	CDN ST08A	No failure detected	Pass

Table 25 Test results of DC power port

Ports	Test Level (Unmodulated)	Inject Method	Description	Conclusion
DC power port	10 V (rms)	CDN-M2	No failure detected	Pass
Earthing	10 V (rms)	CDN-M1	No failure detected	Pass

Table 26 Test results of AC power port

Ports	Test Level (Unmodulated)	Inject Method	Description	Conclusion
AC power port	10 V (rms)	CDN-M3	No failure detected	Pass
Earthing	10 V (rms)	CDN-M1	No failure detected	Pass

7.6 Immunity to Power Frequency Magnetic Field

7.6.1 Test Procedure

The EUT was configured as described in section 4. The set-up and test methods were in accordance with IEC 61000-4-8 standard.

The test set-up diagram is shown as below:

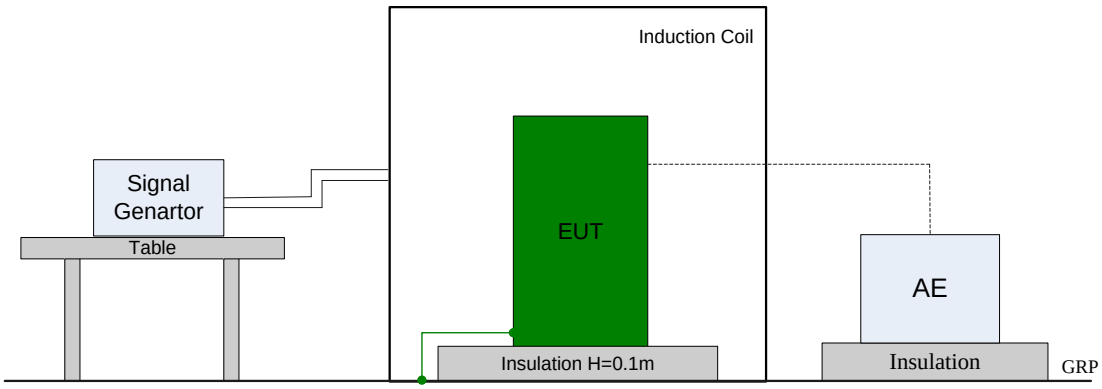

Figure 37. Test set-up of immunity to power frequency magnetic field

7.6.2 Test Results

The EUT has met the requirements of Performance Criterion A defined in section 5.

Table 27 Test results

Coil Position	Three orthogonal position X Y Z
Test Level	100 A/m &1000 A/m
Duration Time	1 min & 1 s
Criterion	Criterion A
Description	No failure detected
Conclusion	Pass

7.7 Immunity to Voltage Dips and Short Interruption of AC Power Port

7.7.1 Test Procedure

The EUT was configured as described in section 4. The set-up and test methods were in accordance with IEC 61000-4-11 standard.

The test set-up diagram is shown as below:

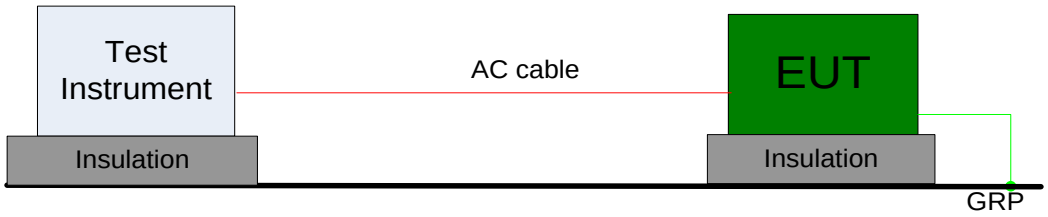

Figure 38. Test set-up of voltage dips and short interruption of AC power port

7.7.2 Test Results

The EUT has met the requirements of performance criterion defined in section 5.

Table 28 Test results of Voltage Dips and short interruptions of AC power port (without battery)

Normal Voltage	Dip to Ut	Duration	Interval	Phase	Rep Times	Performance Criterion	Phenomenon	Result
230 V	0 %	10 ms	10 s	0º, 45º, 90º, 135º, 180º, 225º, 270º, 315º	3	Criterion B	No failure detected	Pass
230 V	0 %	20 ms	10 s	0º, 45º, 90º, 135º, 180º, 225º, 270º, 315º	3	Criterion B	No failure detected	Pass
230 V	40 %	200 ms	10 s	0º, 45º, 90º, 135º, 180º, 225º, 270º, 315º	3	Criterion C	No failure detected	Pass
230 V	70 %	500 ms	10 s	0º, 45º, 90º, 135º, 180º, 225º, 270º, 315º	3	Criterion B	No failure detected	Pass
230 V	0 %	5000 ms	10 s	0º, 45º, 90º, 135º, 180º, 225º, 270º, 315º	3	Criterion C	No failure detected	Pass

7.8 Immunity to Voltage Dips and Short Interruption and Voltage Variation of DC Power Port

7.8.1 Test Procedure

The EUT was configured as described in section 4. The set-up and test methods were in accordance with IEC 61000-4-29 standard.

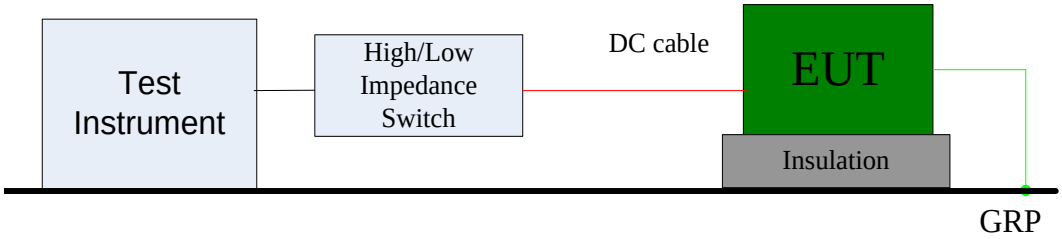

Figure 39. Test set-up of voltage dips and short interruption and voltage variation of DC power port

7.8.2 Test Results

The EUT has met the requirements performance criterion defined in section 5.

Table 29 Test results for -48V DC Power Port (without battery)

Test Items	Dip to Ut	Impedance	Duration	Rep. Times	Interval	Performance Criterion	Phenomenon	Result
Voltage Variation	120%	Low impedance	100ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	300ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	1s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	3s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	10s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	100ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	300ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	1s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	3s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	10s	3	10s	Criterion A	No failure detected	Pass
Voltage DIPs	70%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass

Voltage DIPs	70%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	1s	3	10s	Criterion C	No failure detected	Pass

Table 30 Test results for -60V DC Power Port (without battery)

Test Items	Dip to Ut	Impedance	Duration	Rep. Times	Interval	Performance Criterion	Phenomenon	Result
Voltage Variation	120%	Low impedance	100ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	300ms	3	10s	Criterion A	No failure detected	Pass

Voltage Variation	120%	Low impedance	1s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	3s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	10s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	100ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	300ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	1s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	3s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	10s	3	10s	Criterion A	No failure detected	Pass
Voltage DIPs	70%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass

Short interruption	0%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	1s	3	10s	Criterion C	No failure detected	Pass

Table 31 Test results for 240V DC Power Port (without battery)

Test Items	Dip to Ut	Impedance	Duration	Rep. Times	Interval	Performance Criterion	Phenomenon	Result
Voltage Variation	120%	Low impedance	100ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	300ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	1s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	3s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	120%	Low impedance	10s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	100ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	300ms	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	1s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	3s	3	10s	Criterion A	No failure detected	Pass
Voltage Variation	80%	Low impedance	10s	3	10s	Criterion A	No failure detected	Pass
Voltage DIPs	70%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass

Voltage DIPs	70%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	70%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Voltage DIPs	40%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	Low impedance	1s	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	1ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	3ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	10ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	30ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	100ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	300ms	3	10s	Criterion C	No failure detected	Pass
Short interruption	0%	High impedance	1s	3	10s	Criterion C	No failure detected	Pass

8 Main Test Instruments

Table 32 Main test instruments

Test item	Test Instrument	Model (S/N)	Manufacturer	Calibration Date	Calibration Interval (month)
Radiated emission (Location1)	EMI test receiver	N9038A (MY52260169)	Keysight	2020-04-17	12
	Spectrum analyzer	N9010A (MY52220816)	Keysight	2020-04-18	12
	Bilog antenna	CBL 6112D (35239)	TESEQ	2019-03-21	24
	Horn antenna (1GHz~18GHz)	BBHA 9120D (1078)	SCHWARZBECK	2019-10-25	24
	Chamber _NSA	3m chamber	Albatross	2019-11-16	24
	Chamber _S_{VSWR}	3m chamber	Albatross	2019-11-16	24
Conducted emission (Location1)	EMI test receiver	ESR (101823)	R&S	2020-04-17	12
	Artificial mains network	ENV4200 (100063)	R&S	2020-04-18	12
	Current probe	EZ-17 (101405)	R&S	2020-08-28	12
Current Harmonics Voltage fluctuation and Flicker (Location1)	AC source	ACS 500N6 (V1234113471)	EMTEST	2020-04-20	12
	Flicker impedance	AIF503N16 (V1234113470)	EMTEST	2020-04-20	12
	Harmonics and flickers analyzer	DPA 503N (V1234113469)	EMTEST	2020-04-20	12
Electrostatic discharge (Location1)	ESD simulator	NSG438 (1666)	TESEQ	2020-05-21	12
Immunity to radiated electric fields (Location1)	Signal generator	N5183A (MY50141961)	Keysight	2020-04-18	15
	Broadband antenna	STLP 9120D (9128D-058)	SCHWARZBECK	N/A	N/A
	Broadband antenna	STLP 9149 (9149-421)	SCHWARZBECK	N/A	N/A
	Amplifier	NTWPA-008101000500E (20053075)	Rflight	2020-07-03	12
	Amplifier	AS0827-230 (1054966)	MILMEGA	2020-04-17	12
	Amplifier	NTWPAS-2060100 (16099049)	Rflight	2020-04-17	12
Electrical fast transient bursts (Location1)	Fast transient burst simulator	NSG3060 (169)	TESEQ	2020-06-20	12
	Coupling clamp	CDN 8014 (28088)	TESEQ	2020-06-20	12
SURGE (Location1)	1.2/50 high energy pulse generator	NSG3060 (1078)	TESEQ	2020-04-19	12
Immunity to continuous conducted interference	Signal generator	NSG4070 (26991)	TESEQ	2020-04-16	12
	6dB attenuator	ATN 6075 (27167)	TESEQ	2020-04-16	12

(Location1)	Coupling decoupling network	CDN M016 (27449)	TESEQ	2020-04-16	12
	Coupling decoupling network	FCC-801-M1-50A (09897)	FCC	2020-04-18	12
	100 ohms resistance	CR 100A (314)	TESEQ	2020-04-16	12
	Coupling decoupling network	CDN ST08A (51383)	TESEQ	2020-04-17	12
Voltage Dips, short Interruptions, and Voltage Variations of DC Power Ports (Location1)	Programmable power	PCR9000LE (XE002767)	KIKUSUI	2020-04-19	12
Voltage dips and short interruptions of AC power ports (Location1)	Programmable power	PCR9000LE (XE002767)	KIKUSUI	2020-04-19	12
	Auto step transformer	DSI 1020 (XG001499)	KIKUSUI	2020-04-19	12
Immunity to Power Frequency Magnetic Field (Location2)	Power Frequency Magnetic field Generator	SKS-0805T	SANKI	2020-07-30	12
	Coil	E2019041901	EMTEST	2020-08-04	12

Software Information			
Test Item	Software Name	Manufacturer	Version
Radiated emission	EP5	TOYO	V5.5
Conducted emission	EMC32	R&S	V9.25
Immunity to radiated electric fields	JS35	Tonscend	V2.0.1.4
Immunity to continuous conducted interference	NSG4070_ control	TESEQ	V1.1.1
Voltage dips, short interruptions, and voltage variations of DC power ports	DC.Quik immunity sequencer	KIKUSUI	V1.02
Voltage dips, short interruptions of AC power ports	AC.Quik immunity sequencer	KIKUSUI	V1.02
Current harmonics & voltage fluctuations and flickers	dpa.control	EMTEST	V5.3.1

9 System Measurement Uncertainty

For a 95% confidence level, the measurement extended uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Table 33 System measurement uncertainty

Items		Extended Uncertainty
Radiated emission	Field strength (dBμV/m)	*U*=5.1 dB; *k*=2 (30 MHz to 1 GHz)
		U=5.4 dB; *k*=2 (1 GHz to 18 GHz)
Conducted emission	Disturbance voltage (dBμV)	*U*=2.0 dB; *k*=2 (AMN) *U*=2.7 dB; *k*=2 (Current Probe)
Harmonic current emission	I (A)	*U*=9.9 %; *k*=2
Voltage fluctuations and flicker	Pst	*U*=5.9 %; *k*=2
	Plt	*U*=5.9 %; *k*=2
	dc	*U*=1.2 %; *k*=2
	dmax	*U*=5.2 %; *k*=2
	dt	*U*=1.2 %; *k*=2

10 Graph and Data of Emission Test

10.1 Radiated Disturbance

10.1.1 Radiated Disturbance of TC1-TC3 for 30 MHz-1 GHz

For DC -48V:

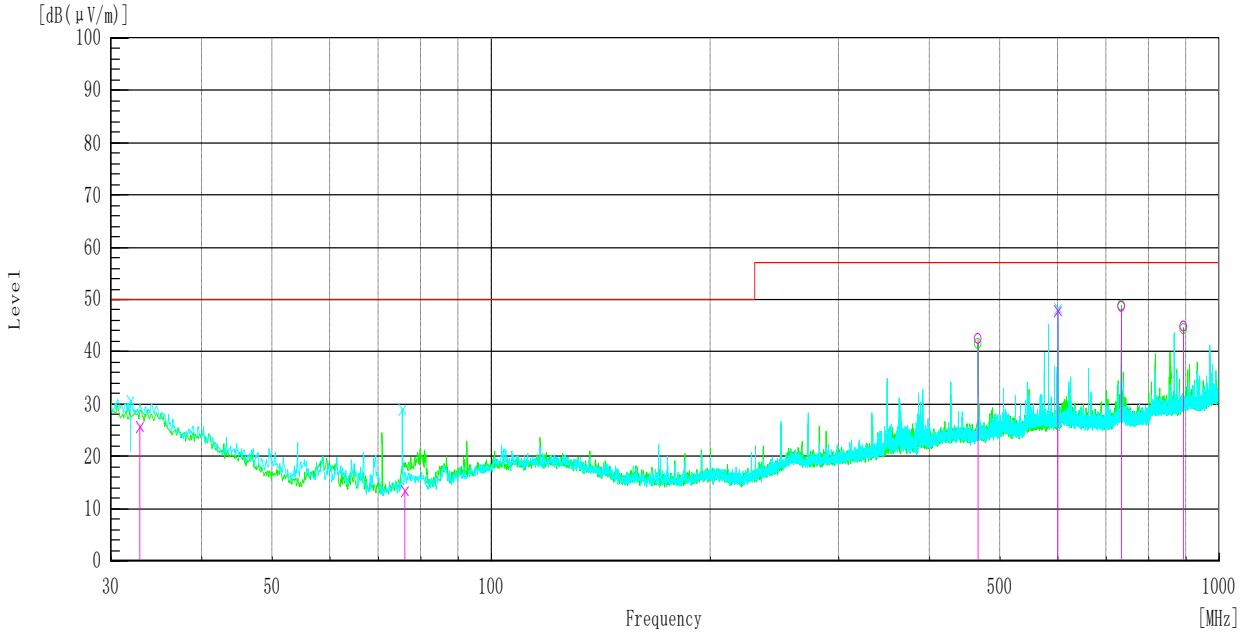

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	32.895	V	40.4	-14.6	25.8	50.0	24.2	118.0	314.0	
2	75.974	V	38.5	-25.0	13.5	50.0	36.5	203.0	54.0	
3	466.670	H	55.2	-12.8	42.4	57.0	14.6	220.0	94.0	
4	599.994	V	58.7	-10.7	48.0	57.0	9.0	101.0	121.0	
5	733.331	H	58.4	-9.7	48.7	57.0	8.3	101.0	311.0	
6	894.240	H	51.8	-7.0	44.8	57.0	12.2	101.0	26.0	

Note:

1. Margin=Limit-Result

Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

2. The DC -48V test configurations of TC1-TC3 were tested, and the worst test result was supplied.

10.1.2 Radiated Disturbance of TC4 for 30 MHz-1 GHz

For AC 230V:

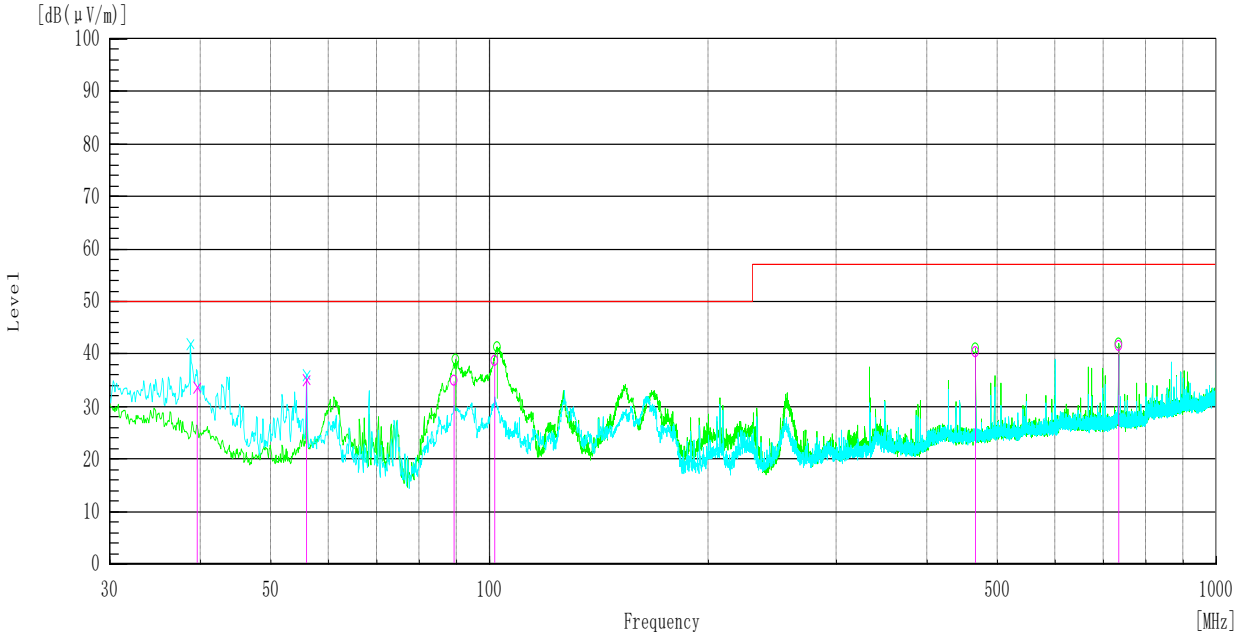

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	39.546	V	51.6	-17.8	33.8	50.0	16.2	100.0	261.0	
2	55.928	V	60.3	-25.1	35.2	50.0	14.8	100.0	323.0	
3	89.346	H	57.5	-22.6	34.9	50.0	15.1	187.0	347.0	
4	101.640	H	58.6	-20.0	38.6	50.0	11.4	156.0	359.0	
5	466.677	H	53.2	-12.8	40.4	57.0	16.6	184.0	325.0	
6	733.345	H	51.2	-9.7	41.5	57.0	15.5	101.0	26.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

For AC 110V:

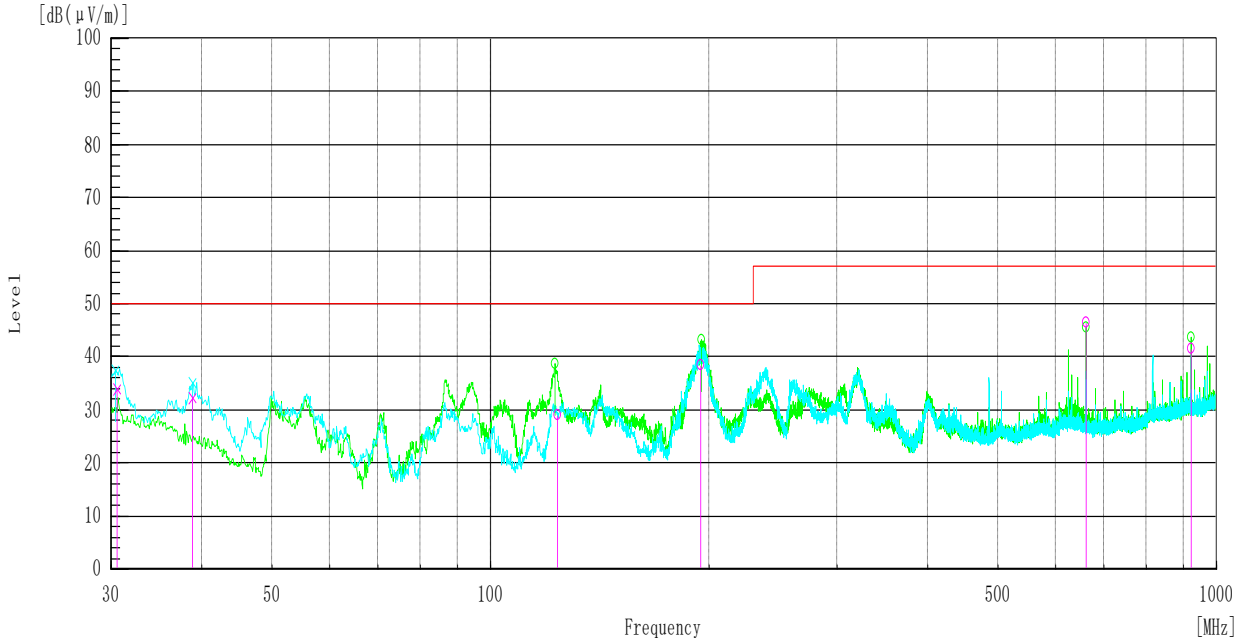

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	30.590	V	47.6	-13.6	34.0	50.0	16.0	100.0	1.0	
2	38.878	V	49.7	-17.5	32.2	50.0	17.8	100.0	133.0	
3	123.706	H	47.9	-18.8	29.1	50.0	20.9	133.0	359.0	
4	194.433	H	59.7	-21.2	38.5	50.0	11.5	199.0	124.0	
5	660.957	H	57.3	-10.8	46.5	57.0	10.5	102.0	311.0	
6	923.415	H	48.3	-6.7	41.6	57.0	15.4	139.0	20.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

For HVDC 240V:

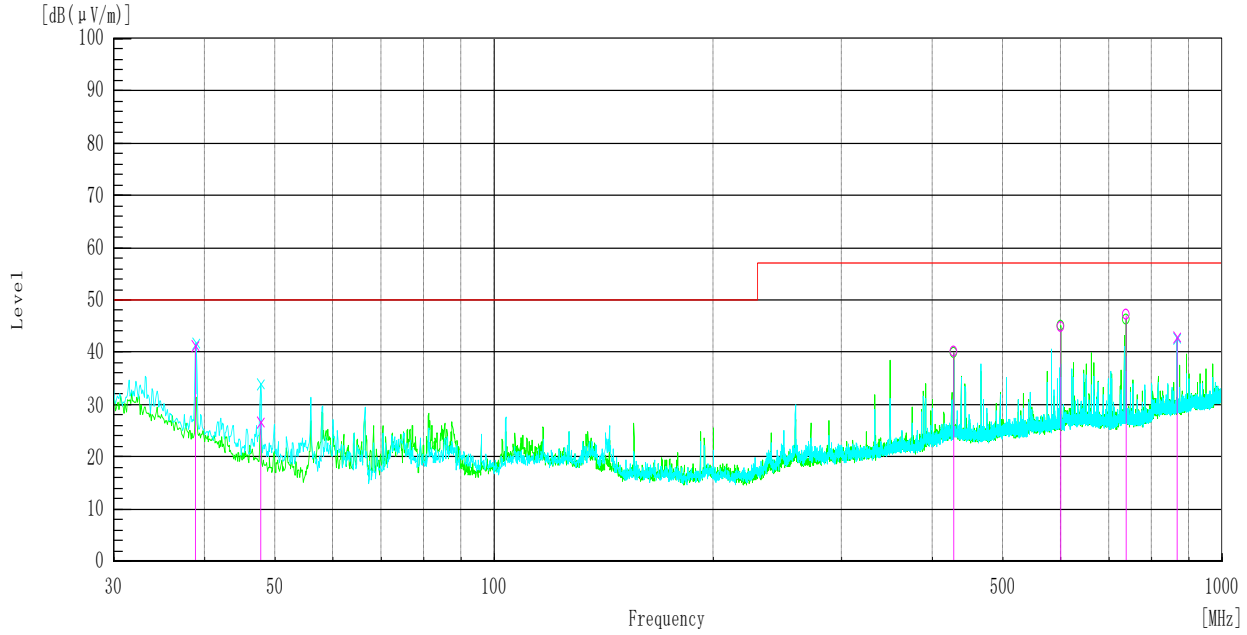

Final Result

No.	Frequency	(P)	Reading QP	c.f	Result QP	Limit QP	Margin QP	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]	
1	38.876	V	58.7	-17.5	41.2	50.0	8.8	100.0	83.0	
2	47.748	V	48.8	-22.2	26.6	50.0	23.4	100.0	129.0	
3	427.684	H	52.7	-12.7	40.0	57.0	17.0	192.0	159.0	
4	600.006	H	55.5	-10.7	44.8	57.0	12.2	103.0	107.0	
5	738.725	H	57.0	-9.8	47.2	57.0	9.8	100.0	31.0	
6	866.665	V	50.3	-7.5	42.8	57.0	14.2	130.0	161.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

10.1.3 Radiated Disturbance of TC1-TC4 for 1 GHz-6 GHz

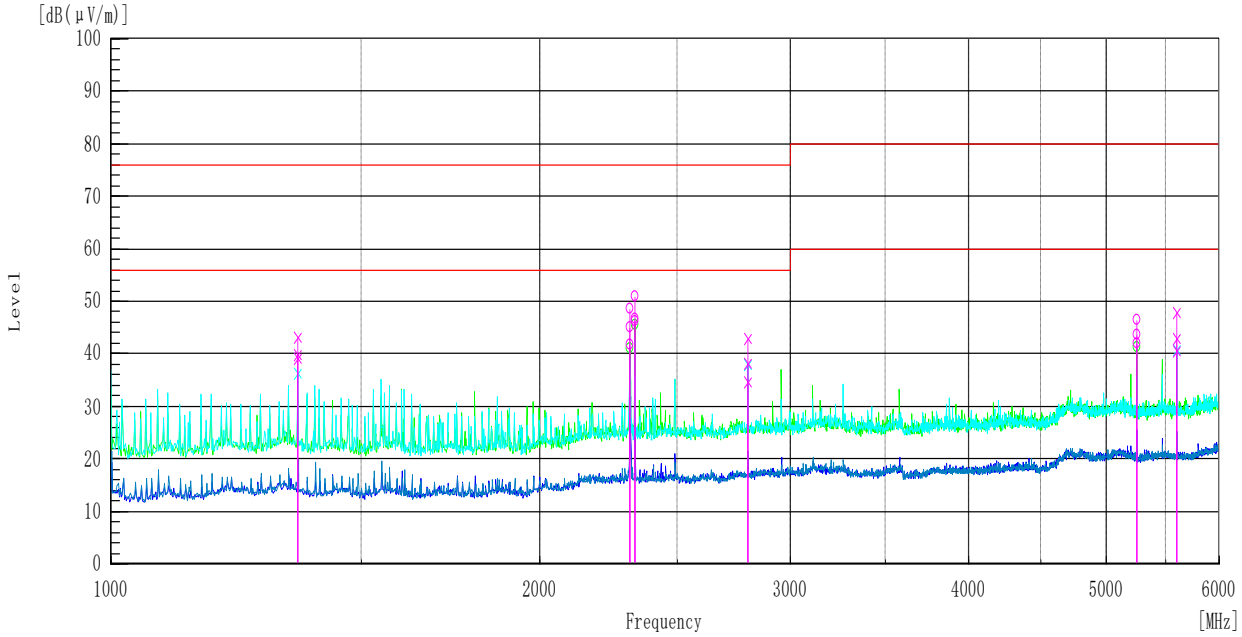

Final Result

No.	Frequency	(P)	Reading PK	Reading CAV	Reading AV	c.f	Result PK	Result CAV	Result AV	Limit PK	Limit AV	Margin PK	Margin CAV	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	1351.902	V	57.9	54.0	54.8	-14.9	43.0	39.1	39.9	76.0	56.0	33.0	16.9	118.0	25.0	
2	2313.579	H	60.2	53.3	56.6	-11.6	48.6	41.7	45.0	76.0	56.0	27.4	14.3	163.0	31.0	
3	2332.831	H	62.6	58.3	57.7	-11.6	51.0	46.7	46.1	76.0	56.0	25.0	9.3	154.0	87.0	
4	2800.189	V	52.6	44.3	47.8	-9.6	43.0	34.7	38.2	76.0	56.0	33.0	21.3	152.0	42.0	
5	5250.005	H	49.9	45.2	47.0	-3.3	46.6	41.9	43.7	80.0	60.0	33.4	18.1	100.0	26.0	
6	5600.138	V	50.9	43.5	45.9	-2.9	48.0	40.6	43.0	80.0	60.0	32.0	19.4	106.0	20.0	

Note:
1. Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)
2. All power supply modes of the test configurations TC1-TC4 were tested, and the worst test result was supplied.

10.1.4 Radiated Disturbance of TC5-TC7 for 30 MHz-6 GHz

30 MHz to 1 GHz:
For DC -48V:

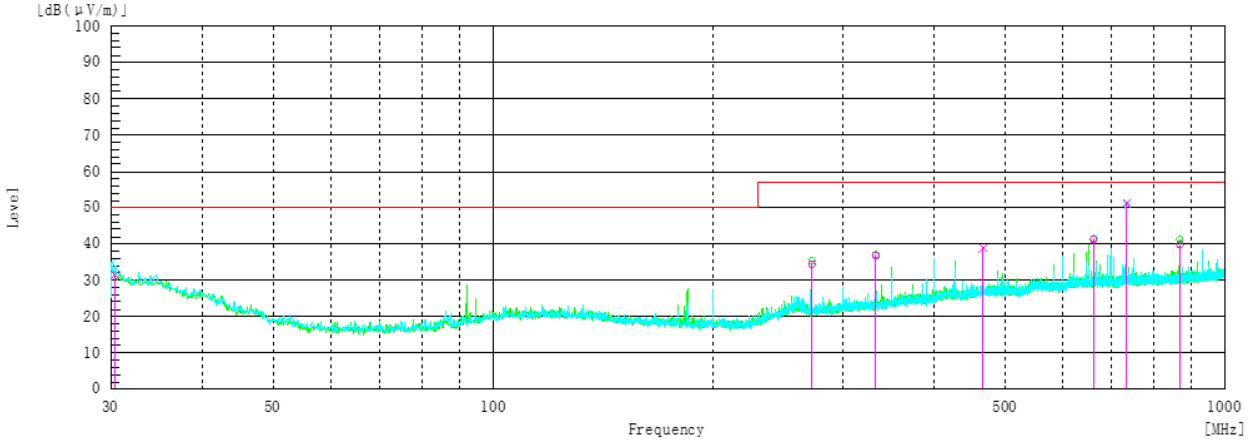

Final Result

No.	Frequency	(P)	Reading QP	c.f	Result QP	Limit QP	Margin QP	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]	
1	30.433	V	45.1	-13.5	31.6	50.0	18.4	102.0	259.0	
2	272.168	H	52.1	-17.7	34.4	57.0	22.6	101.0	164.0	
3	333.326	H	53.1	-16.4	36.7	57.0	20.3	101.0	299.0	
4	466.661	V	51.5	-12.6	38.9	57.0	18.1	101.0	155.0	
5	660.959	H	51.8	-10.6	41.2	57.0	15.8	102.0	318.0	
6	733.326	V	61.1	-9.8	51.3	57.0	5.7	130.0	351.0	
7	866.654	H	48.8	-9.0	39.8	57.0	17.2	102.0	32.0	

Note:
1. Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)
2. The test configurations of TC5-TC7 were tested, and the worst test result was supplied.

1 GHz to 6 GHz:

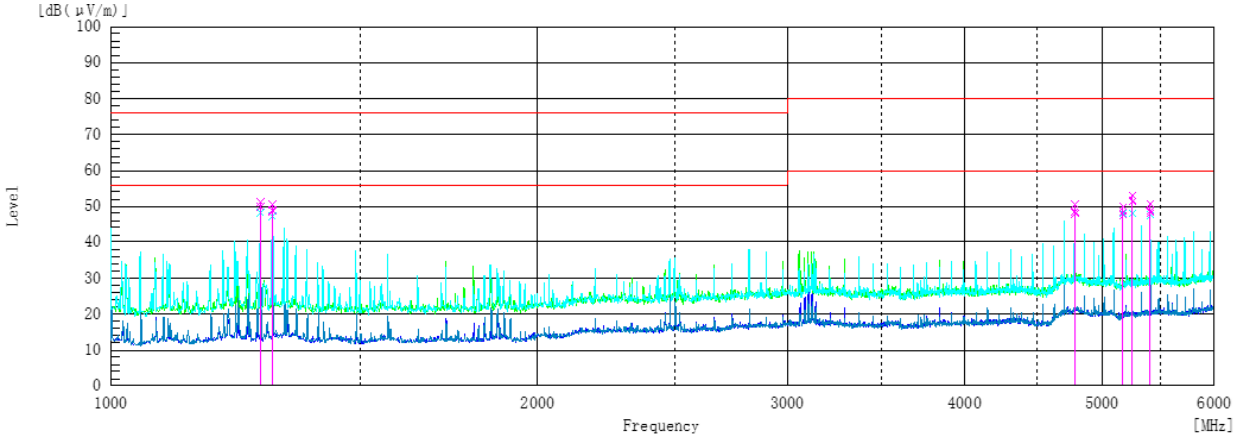

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	1275.012	V	66.8	65.3	65.5	-15.4	51.4	49.9	50.1	76.0	56.0	24.6	6.1	130.0	347.0	
2	1299.941	V	66.0	64.3	64.5	-15.4	50.6	48.9	49.1	76.0	56.0	25.4	7.1	144.0	344.0	
3	4780.699	V	54.4	51.9	52.2	-3.7	50.7	48.2	48.5	80.0	60.0	29.3	11.8	121.0	25.0	
4	5172.560	V	52.9	50.7	51.6	-3.0	49.9	47.7	48.6	80.0	60.0	30.1	12.3	118.0	10.0	
5	5250.952	V	56.4	54.7	55.1	-3.3	53.1	51.4	51.8	80.0	60.0	26.9	8.6	148.0	10.0	
6	5407.665	V	53.7	51.4	51.7	-3.0	50.7	48.4	48.7	80.0	60.0	29.3	11.6	100.0	26.0	

Note:
1. Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)
2. The test configurations of TC5-TC7 were tested, and the worst test result was supplied.

10.1.5 Radiated Disturbance of TC8 for 30 MHz-1 GHz

AC 230V:

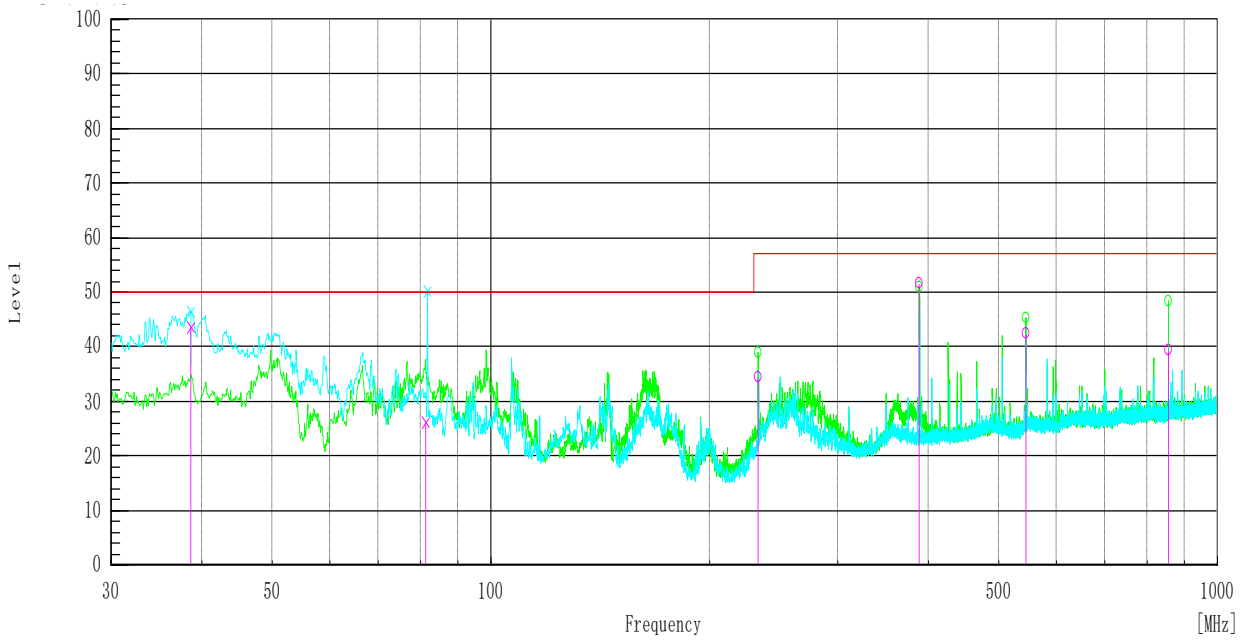

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	81.193	V	50.1	-24.0	26.1	50.0	23.9	101.0	225.0	
2	38.636	V	60.9	-17.3	43.6	50.0	6.4	101.0	32.0	
3	388.803	H	66.2	-14.7	51.5	57.0	5.5	204.0	1.0	
4	855.356	H	48.4	-9.1	39.3	57.0	17.7	102.0	327.0	
5	544.312	H	53.6	-11.2	42.4	57.0	14.6	100.0	173.0	
6	233.279	H	54.4	-20.1	34.3	57.0	22.7	303.0	297.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

AC 110V:

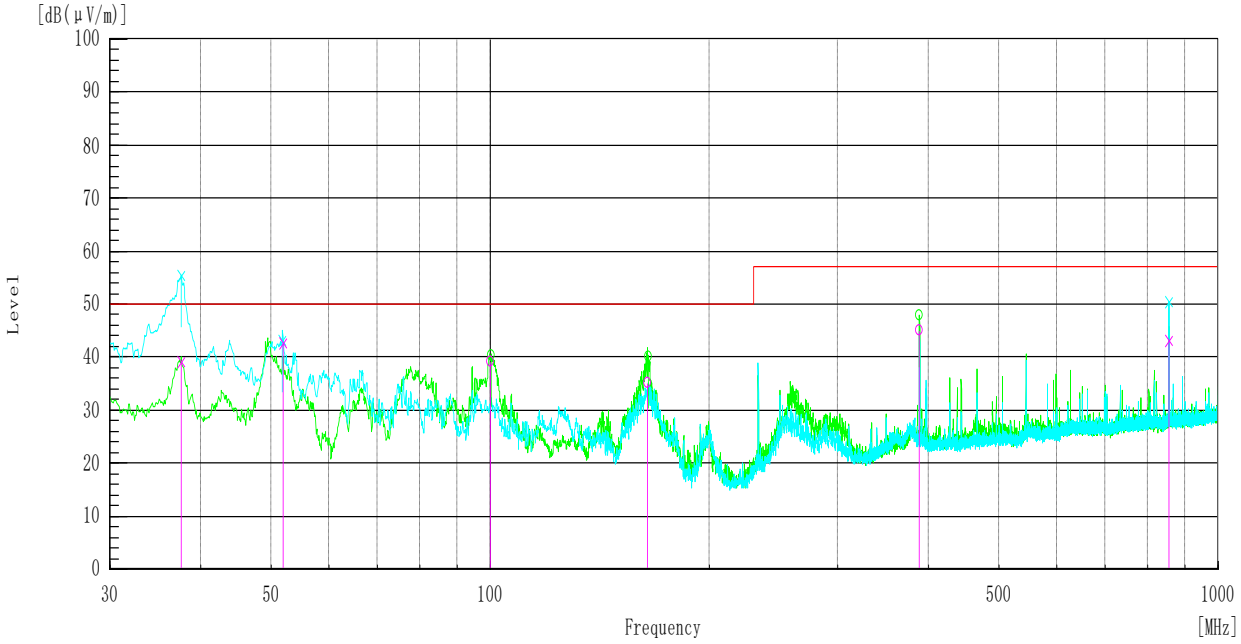

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	37.551	V	55.8	-16.7	39.1	50.0	10.9	100.0	62.0	
2	855.367	V	52.3	-9.1	43.2	57.0	13.8	105.0	1.0	
3	51.856	V	66.7	-24.0	42.7	50.0	7.3	100.0	52.0	
4	388.799	H	59.7	-14.7	45.0	57.0	12.0	100.0	61.0	
5	99.881	H	59.7	-20.5	39.2	50.0	10.8	175.0	5.0	
6	164.500	H	56.2	-21.1	35.1	50.0	14.9	100.0	359.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

HVDC 240V:

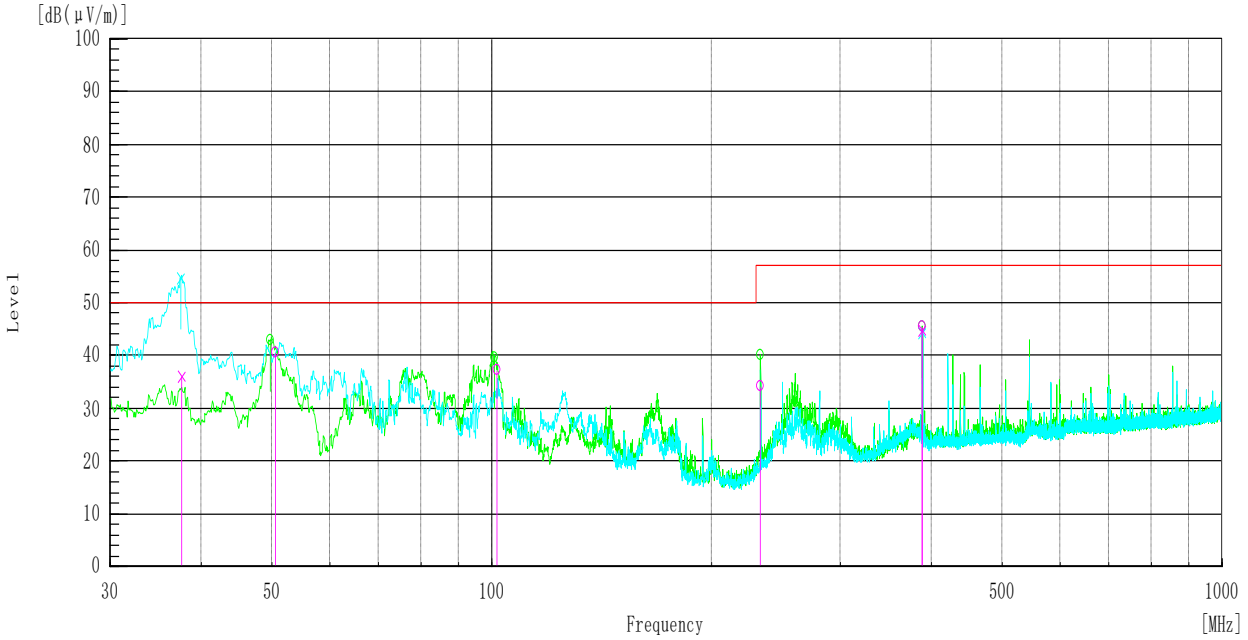

Final Result

No.	Frequency	(P)	Reading QP	c.f	Result QP	Limit QP	Margin QP	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]	
1	37.554	V	52.7	-16.7	36.0	50.0	14.0	101.0	99.0	
2	50.533	H	64.2	-23.6	40.6	50.0	9.4	298.0	1.0	
3	388.801	H	60.3	-14.7	45.6	57.0	11.4	199.0	335.0	
4	388.798	V	59.4	-14.7	44.7	57.0	12.3	207.0	318.0	
5	101.619	H	57.4	-20.1	37.3	50.0	12.7	163.0	5.0	
6	233.276	H	54.4	-20.1	34.3	57.0	22.7	100.0	76.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

10.1.6 Radiated Disturbance of TC8 for 1 GHz-6 GHz

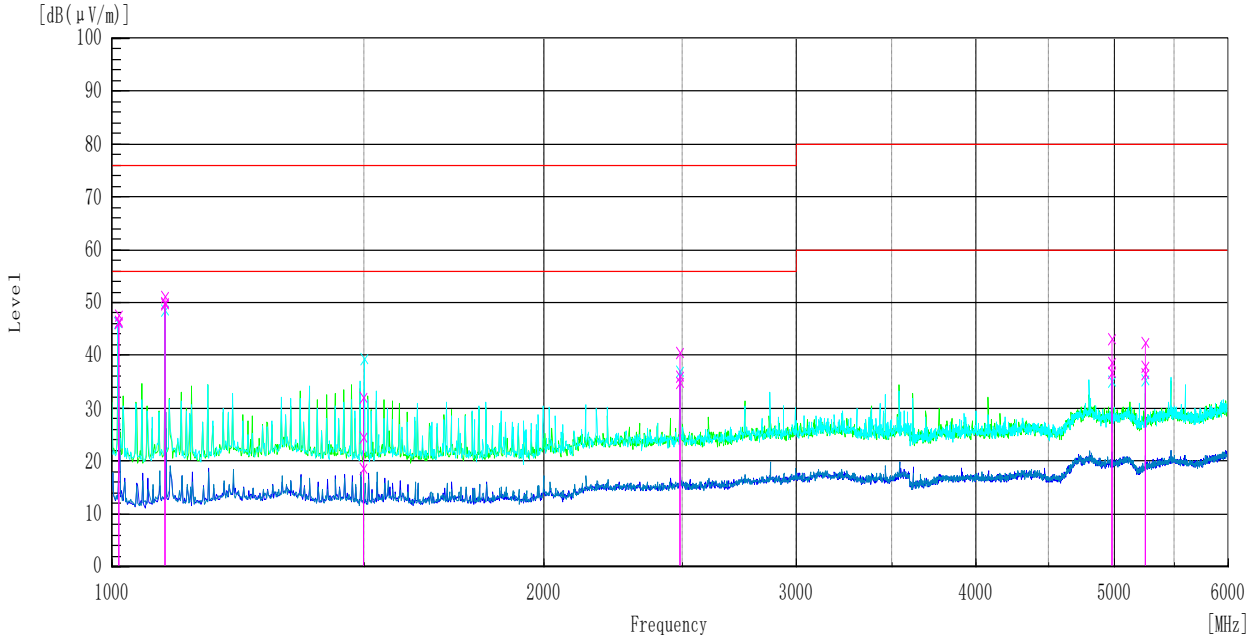

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	1010.854	V	65.0	63.5	63.8	-17.3	47.7	46.2	46.5	76.0	56.0	28.3	9.8	113.0	1.0	
2	1088.635	V	68.1	66.9	67.0	-17.0	51.1	49.9	50.0	76.0	56.0	24.9	6.1	101.0	240.0	
3	1498.150	V	48.1	34.6	40.6	-16.1	32.0	18.5	24.5	76.0	56.0	44.0	37.5	160.0	154.0	
4	2488.371	V	51.9	46.3	47.6	-11.4	40.5	34.9	36.2	76.0	56.0	35.5	21.1	100.0	355.0	
5	4976.808	V	46.9	40.5	42.3	-3.7	43.2	36.8	38.6	80.0	60.0	36.8	23.2	100.0	359.0	
6	5250.022	V	45.7	39.8	41.2	-3.3	42.4	36.5	37.9	80.0	60.0	37.6	23.5	195.0	352.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

10.1.7 Radiated Disturbance of TC9 for 30 MHz-1 GHz

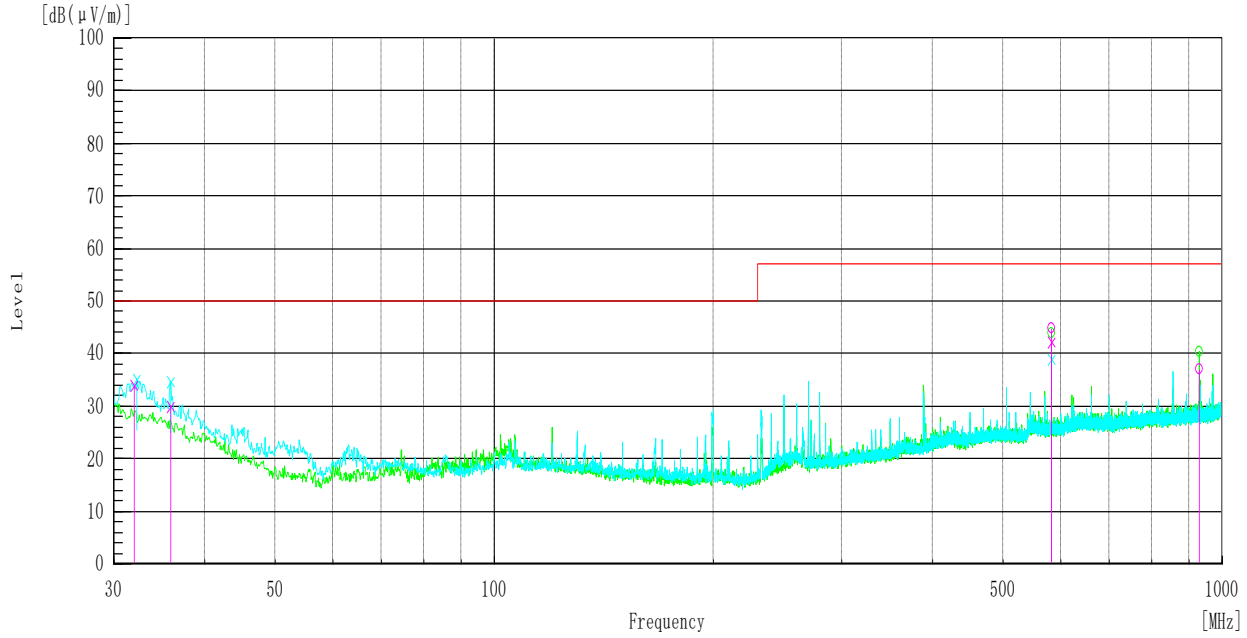

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	32.008	V	48.3	-14.3	34.0	50.0	16.0	101.0	256.0	
2	35.870	V	46.0	-16.0	30.0	50.0	20.0	101.0	209.0	
3	583.199	V	53.2	-11.0	42.2	57.0	14.8	187.0	149.0	
4	583.203	H	55.8	-11.0	44.8	57.0	12.2	205.0	295.0	
5	929.126	H	45.8	-8.8	37.0	57.0	20.0	258.0	248.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

10.1.8 Radiated Disturbance of TC9 for 1 GHz-6 GHz

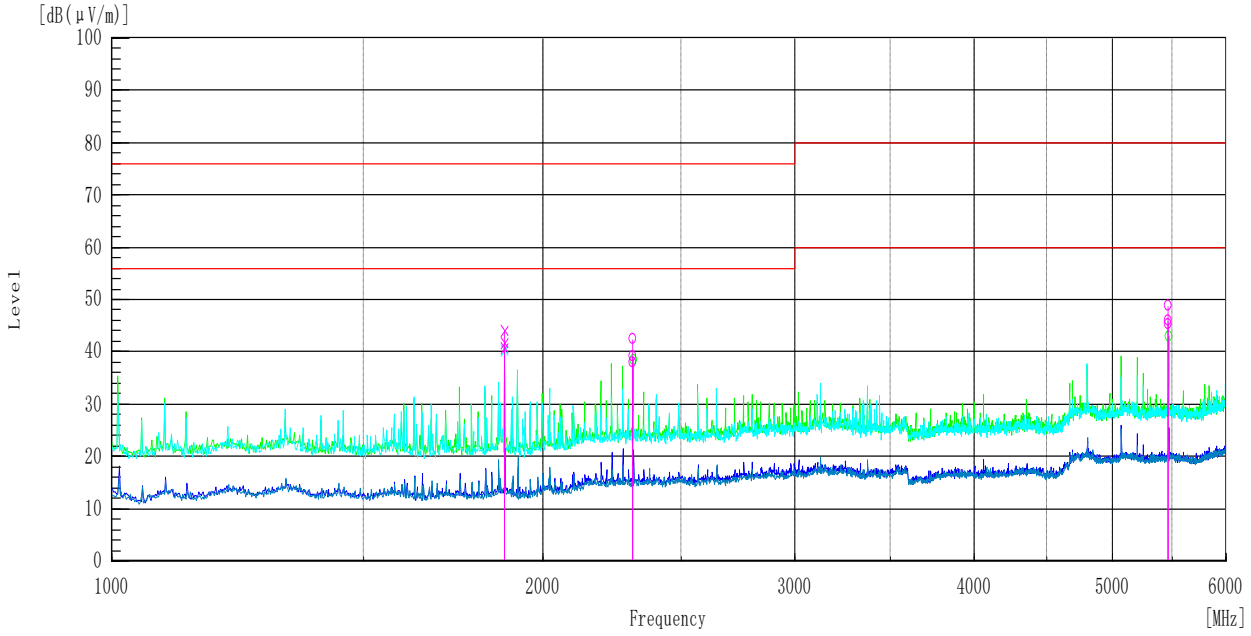

Final Result

No.	Frequency	(P)	Reading PK	Reading CAV	Reading AV	c.f	Result PK	Result CAV	Result AV	Limit PK	Limit AV	Margin PK	Margin CAV	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	1880.843	V	58.9	55.5	56.5	-14.8	44.1	40.7	41.7	76.0	56.0	31.9	15.3	137.0	23.0	
2	2312.017	H	54.5	50.0	51.1	-12.0	42.5	38.0	39.1	76.0	56.0	33.5	18.0	100.0	317.0	
3	5468.784	H	51.7	48.3	48.8	-2.9	48.8	45.4	45.9	80.0	60.0	31.2	14.6	102.0	336.0	

Note:
Margin=Limit-Result
Result=Reading level by receiver + c.f (Antenna factor + cable loss – preamplifier gain)

10.2 Conducted Disturbance

10.2.1 ETH Port Test Data of TC1-TC9

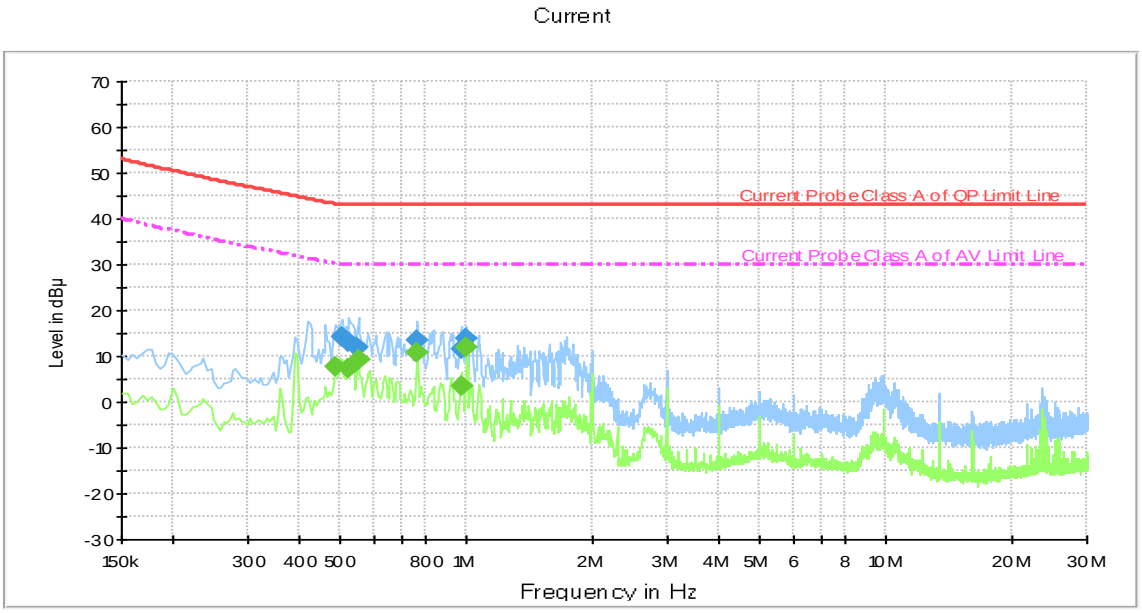

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.501000	14.1	43.0	28.9	1000.0	9.000	-3.3
0.523500	13.1	43.0	29.9	1000.0	9.000	-3.5
0.546000	11.8	43.0	31.2	1000.0	9.000	-3.7
0.762000	13.3	43.0	29.7	1000.0	9.000	-5.4
0.973845	11.7	43.0	31.3	1000.0	9.000	-6.7
0.995520	14.0	43.0	29.0	1000.0	9.000	-6.9

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.483000	7.7	30.2	22.5	1000.0	9.000	-3.1
0.523500	7.5	30.0	22.5	1000.0	9.000	-3.5
0.550500	9.4	30.0	20.6	1000.0	9.000	-3.8
0.762000	10.7	30.0	19.3	1000.0	9.000	-5.4
0.973845	3.5	30.0	26.5	1000.0	9.000	-6.7
0.995520	11.8	30.0	18.2	1000.0	9.000	-6.9

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC1-TC9 were tested, and the worst test result was supplied.

10.2.2 E1(120ohm) Port Test Data of TC2-TC4 & TC7-TC8

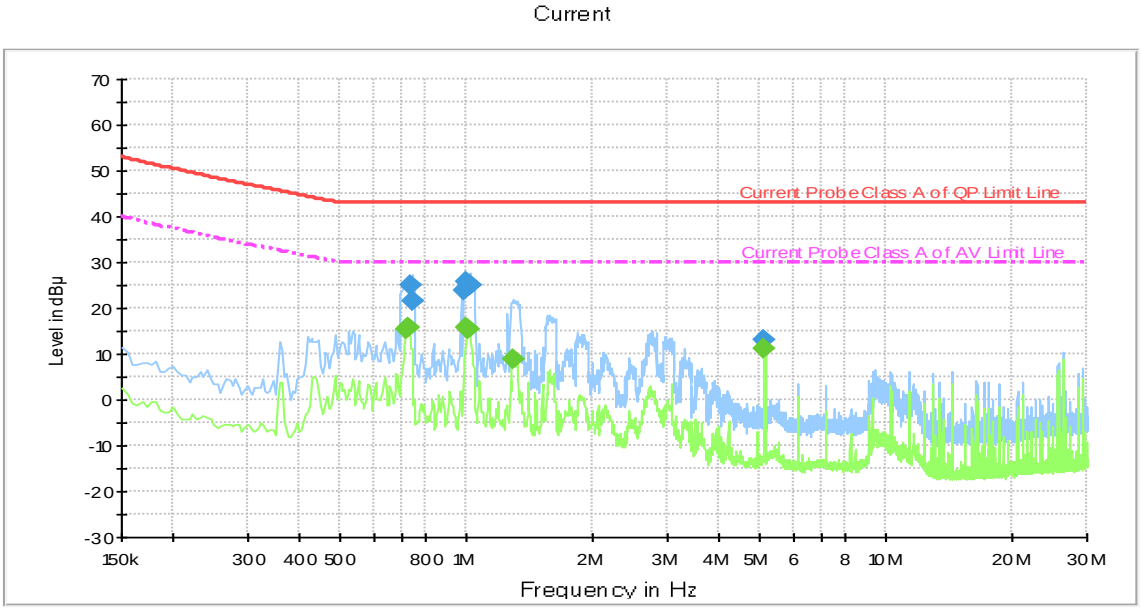

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.735000	25.0	43.0	18.0	1000.0	9.000	-5.2
0.744000	21.6	43.0	21.4	1000.0	9.000	-5.2
0.977588	24.0	43.0	19.0	1000.0	9.000	-6.8
0.995520	25.6	43.0	17.4	1000.0	9.000	-6.9
1.013430	25.2	43.0	17.8	1000.0	9.000	-6.9
5.119410	13.1	43.0	29.9	1000.0	9.000	-9.2

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.717000	15.5	30.0	14.5	1000.0	9.000	-5.1
0.721499	15.7	30.0	14.3	1000.0	9.000	-5.1
0.995498	15.6	30.0	14.4	1000.0	9.000	-6.9
1.008930	15.4	30.0	14.6	1000.0	9.000	-6.9
1.294943	8.8	30.0	21.2	1000.0	9.000	-7.5
5.119410	11.0	30.0	19.0	1000.0	9.000	-9.2

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC2-TC4 & TC7-TC8 were tested, and the worst test result was supplied.

10.2.3 E1(75ohm) Port Test Data of TC2-TC4 & TC7-TC8

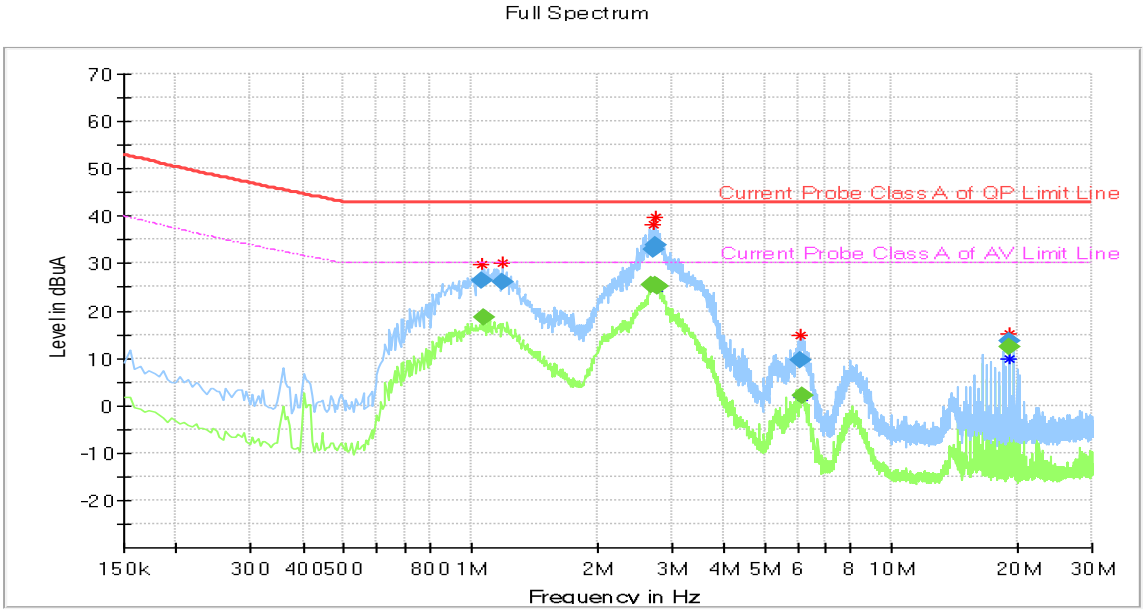

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
1.067182	26.25	43.00	16.75	1000.0	9.000	-7.9
1.188052	26.02	43.00	16.98	1000.0	9.000	-8.2
2.719425	32.82	43.00	10.18	1000.0	9.000	-9.6
2.746200	33.86	43.00	9.14	1000.0	9.000	-9.6
6.086528	9.48	43.00	33.52	1000.0	9.000	-9.9
19.098502	13.58	43.00	29.42	1000.0	9.000	-9.9

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
1.080592	18.45	30.00	11.55	1000.0	9.000	-8.0
2.705925	25.60	30.00	4.40	1000.0	9.000	-9.6
2.750745	25.45	30.00	4.55	1000.0	9.000	-9.6
2.773110	25.23	30.00	4.77	1000.0	9.000	-9.6
6.126870	1.97	30.00	28.03	1000.0	9.000	-9.9
19.098480	12.34	30.00	17.66	1000.0	9.000	-9.9

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC2-TC4 & TC7-TC8 were tested, and the worst test result was supplied.

10.2.4 T1 Port Test Data of TC2 & TC4 & TC7-TC8

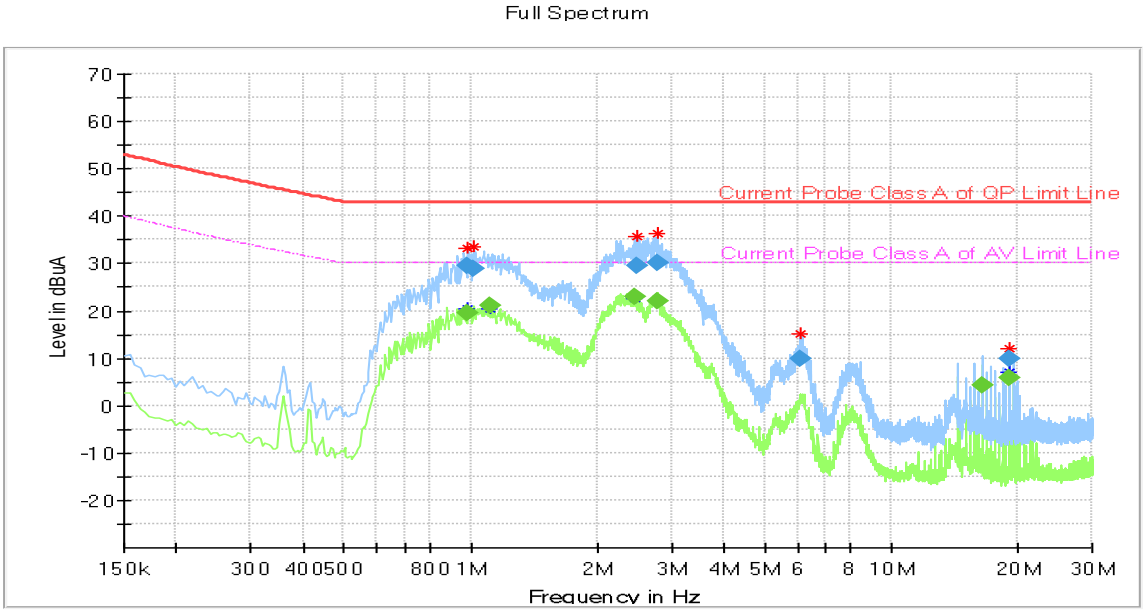

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.986565	29.38	43.00	13.62	1000.0	9.000	-7.7
1.017908	28.99	43.00	14.01	1000.0	9.000	-7.8
2.488883	29.63	43.00	13.37	1000.0	9.000	-9.5
2.773110	30.21	43.00	12.79	1000.0	9.000	-9.6
6.068640	9.84	43.00	33.16	1000.0	9.000	-9.9
19.094048	10.00	43.00	33.00	1000.0	9.000	-9.9

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.986565	19.68	30.00	10.32	1000.0	9.000	-7.7
1.111958	21.16	30.00	8.84	1000.0	9.000	-8.0
2.446275	22.82	30.00	7.18	1000.0	9.000	-9.5
2.777632	22.09	30.00	7.91	1000.0	9.000	-9.6
16.474642	4.18	30.00	25.82	1000.0	9.000	-10.0
19.094025	5.77	30.00	24.23	1000.0	9.000	-9.9

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC2 & TC4 & TC7-TC8 were tested, and the worst test result was supplied.

10.2.5 E&M Port Test Data of TC3

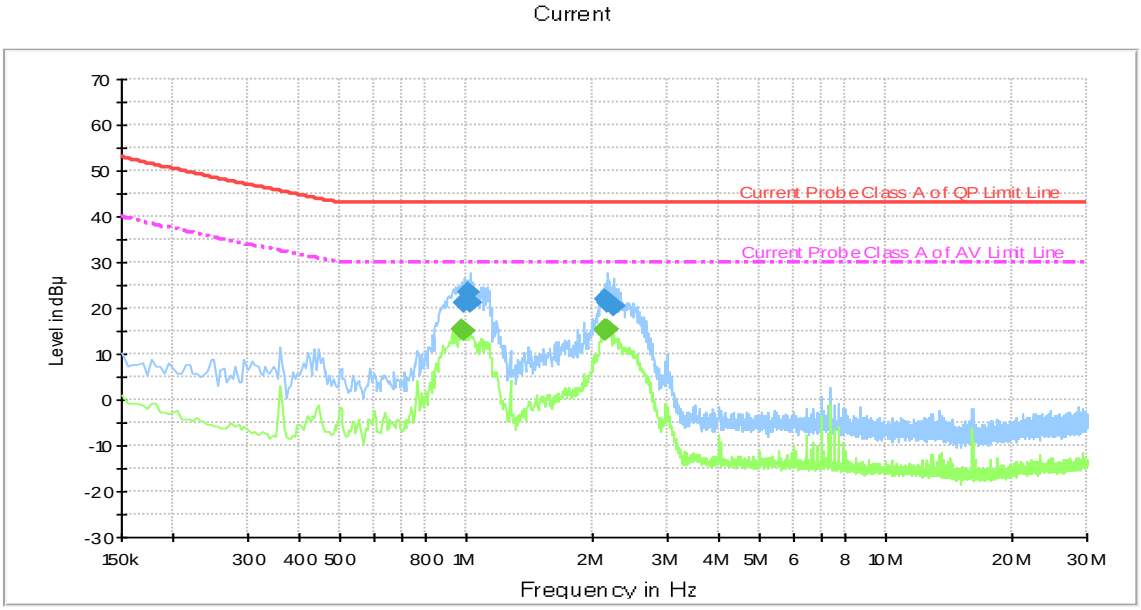

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.986565	21.3	43.0	21.7	1000.0	9.000	-6.8
1.004475	23.3	43.0	19.7	1000.0	9.000	-6.9
1.013408	21.3	43.0	21.7	1000.0	9.000	-6.9
2.141760	21.7	43.0	21.3	1000.0	9.000	-8.5
2.164170	21.0	43.0	22.0	1000.0	9.000	-8.5
2.244810	20.3	43.0	22.7	1000.0	9.000	-8.6

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.968632	15.4	30.0	14.6	1000.0	9.000	-6.7
0.986565	15.0	30.0	15.0	1000.0	9.000	-6.8
2.132872	15.5	30.0	14.5	1000.0	9.000	-8.5
2.146215	15.1	30.0	14.9	1000.0	9.000	-8.5
2.146260	15.3	30.0	14.7	1000.0	9.000	-8.5
2.159670	15.2	30.0	14.8	1000.0	9.000	-8.5

Note:
Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.

10.2.6 FXS/O Port Test Data of TC3

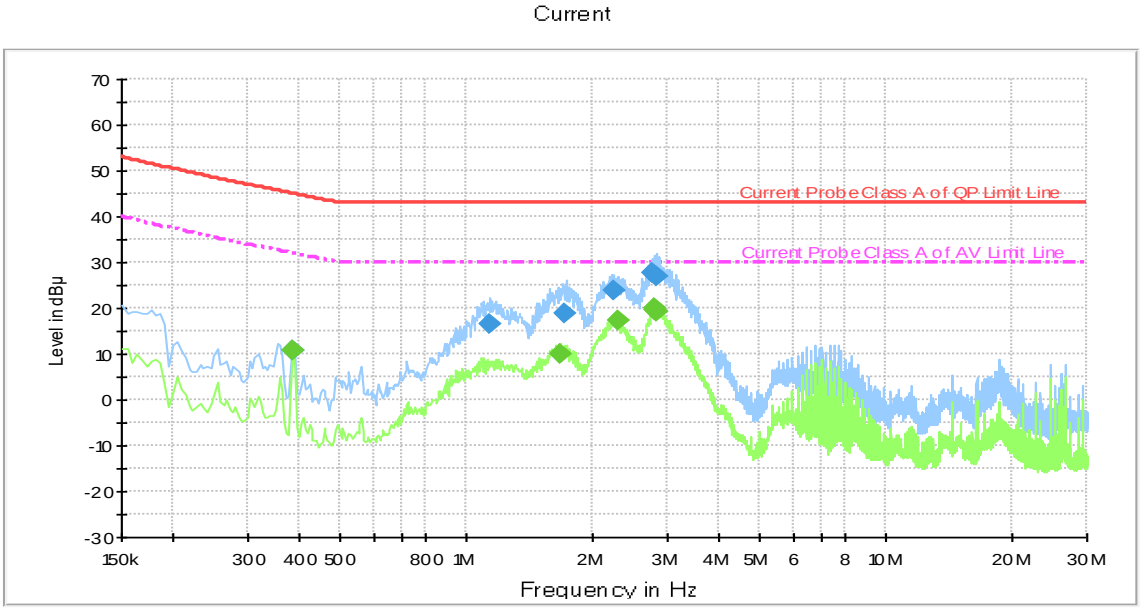

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.384000	10.7	45.0	34.3	1000.0	9.000	-1.9
1.129822	16.6	43.0	26.4	1000.0	9.000	-7.2
1.716398	18.9	43.0	24.1	1000.0	9.000	-8.1
2.231378	23.8	43.0	19.2	1000.0	9.000	-8.6
2.777565	27.7	43.0	15.3	1000.0	9.000	-8.7
2.835750	26.8	43.0	16.2	1000.0	9.000	-8.7

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.384000	10.6	32.0	21.3	1000.0	9.000	-1.9
1.674833	10.1	30.0	19.9	1000.0	9.000	-8.1
2.294040	17.2	30.0	12.8	1000.0	9.000	-8.6
2.782132	19.8	30.0	10.2	1000.0	9.000	-8.7
2.795542	20.1	30.0	9.9	1000.0	9.000	-8.7
2.840250	19.4	30.0	10.6	1000.0	9.000	-8.7

Note:
Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.

10.2.7 WSC Port Test Data of TC5-TC6

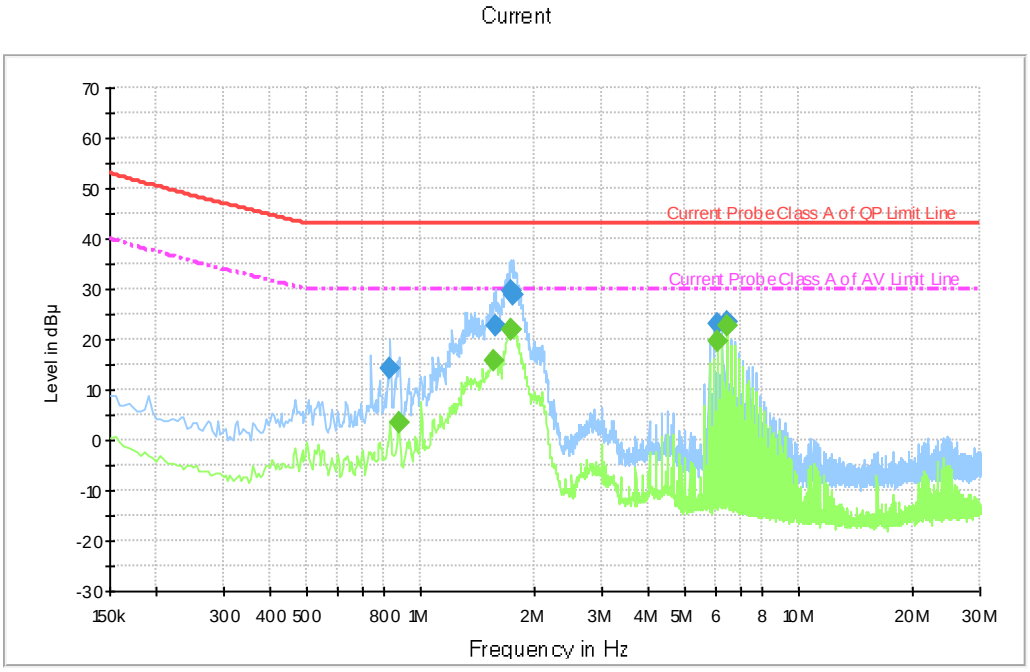

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.825000	14.1	43.0	28.9	1000.0	9.000	-5.8
1.577640	22.6	43.0	20.4	1000.0	9.000	-7.9
1.720875	29.7	43.0	13.3	1000.0	9.000	-8.1
1.751715	28.8	43.0	14.2	1000.0	9.000	-8.2
6.086572	23.2	43.0	19.8	1000.0	9.000	-9.4
6.404475	23.4	43.0	19.6	1000.0	9.000	-9.5

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.870000	3.3	30.0	26.7	1000.0	9.000	-6.1
1.550730	15.9	30.0	14.1	1000.0	9.000	-7.9
1.724580	21.9	30.0	8.1	1000.0	9.000	-8.1
1.729830	22.0	30.0	8.0	1000.0	9.000	-8.2
6.086572	19.6	30.0	10.4	1000.0	9.000	-9.4
6.404475	22.7	30.0	7.3	1000.0	9.000	-9.5

Note:
1. Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.
2. The test configurations of TC5-TC6 were tested, and the worse test result was supplied.

10.2.8 ALMO Port Test Data of TC7-TC8

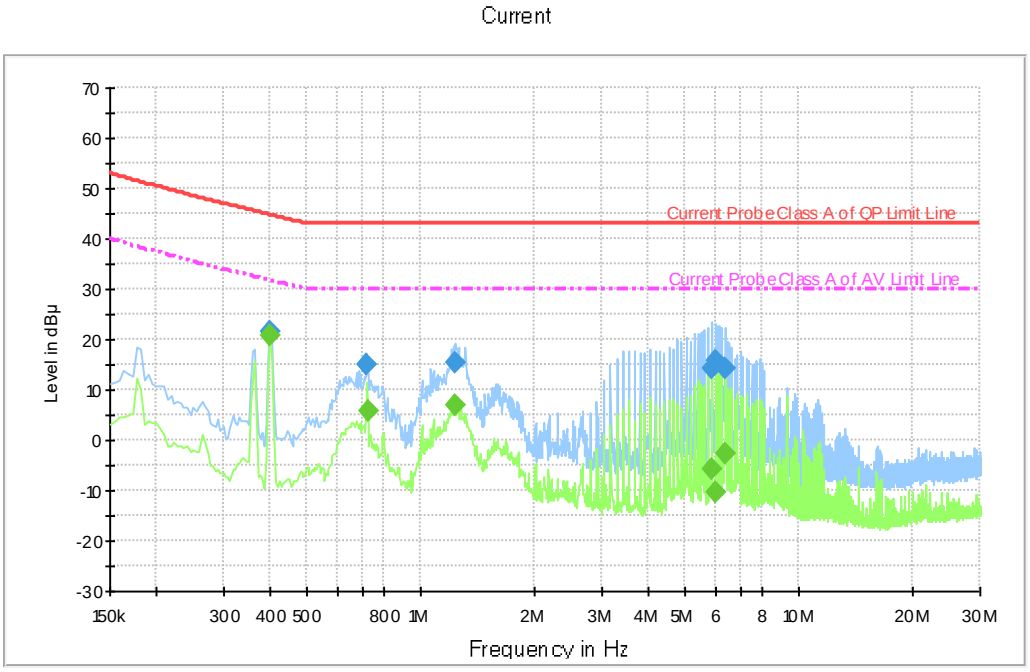

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.397500	21.7	44.7	23.0	1000.0	9.000	-2.1
0.717000	14.9	43.0	28.1	1000.0	9.000	-5.1
1.223872	15.2	43.0	27.8	1000.0	9.000	-7.4
5.876198	14.3	43.0	28.7	1000.0	9.000	-9.4
6.001590	15.7	43.0	27.3	1000.0	9.000	-9.4
6.341745	14.4	43.0	28.6	1000.0	9.000	-9.5

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.397500	20.6	31.7	11.1	1000.0	9.000	-2.1
0.721499	5.7	30.0	24.3	1000.0	9.000	-5.1
1.223872	7.1	30.0	22.9	1000.0	9.000	-7.4
5.840198	-5.8	30.0	35.8	1000.0	9.000	-9.4
5.979090	-10.3	30.0	40.3	1000.0	9.000	-9.4
6.337245	-2.5	30.0	32.5	1000.0	9.000	-9.5

Note:
1. Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.
2. The test configurations of TC7-TC8 were tested, and the worse test result was supplied.

10.2.9 ALMI Port Test Data of TC7-TC8

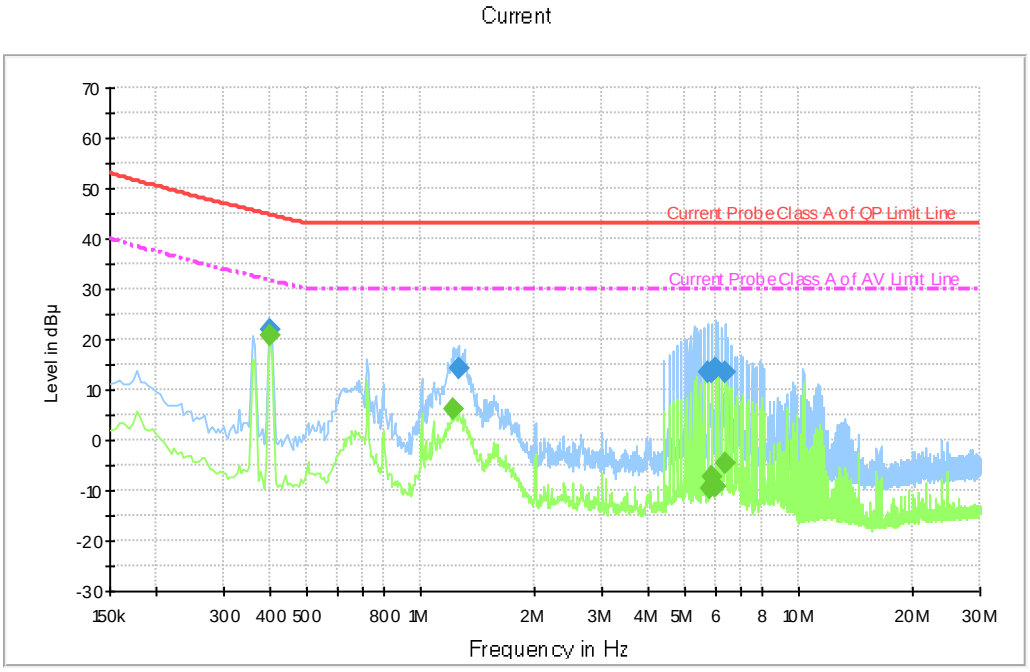

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.397500	21.8	44.7	23.0	1000.0	9.000	-2.1
1.250738	14.1	43.0	28.9	1000.0	9.000	-7.4
5.746328	13.5	43.0	29.5	1000.0	9.000	-9.3
5.880720	13.6	43.0	29.4	1000.0	9.000	-9.4
6.001612	14.3	43.0	28.7	1000.0	9.000	-9.4
6.328245	13.6	43.0	29.4	1000.0	9.000	-9.5

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.397500	20.9	31.7	10.8	1000.0	9.000	-2.1
1.219418	6.1	30.0	23.9	1000.0	9.000	-7.3
5.759828	-9.4	30.0	39.4	1000.0	9.000	-9.4
5.858220	-7.3	30.0	37.3	1000.0	9.000	-9.4
5.970112	-9.3	30.0	39.3	1000.0	9.000	-9.4
6.337268	-4.5	30.0	34.5	1000.0	9.000	-9.5

Note:
1. Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.
2. The test configurations of TC7-TC8 were tested, and the worse test result was supplied.

10.2.10 TOD Port Test Data of TC7-TC8

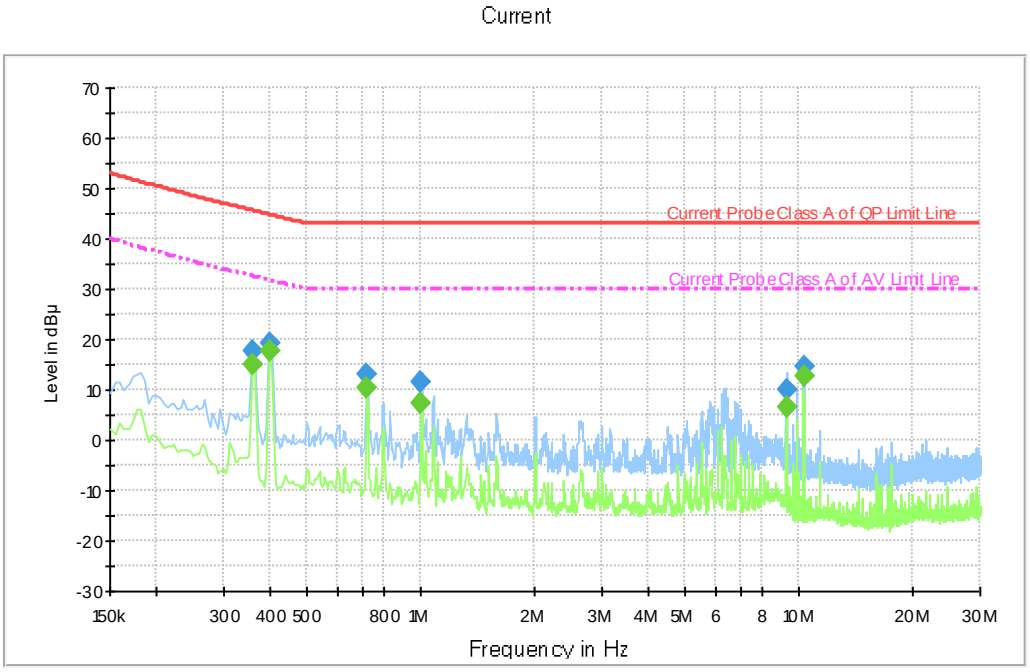

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.357000	17.7	45.6	27.9	1000.0	9.000	-1.4
0.397500	19.2	44.7	25.6	1000.0	9.000	-2.1
0.717000	13.3	43.0	29.7	1000.0	9.000	-5.1
0.999998	11.7	43.0	31.3	1000.0	9.000	-6.9
9.216412	9.8	43.0	33.2	1000.0	9.000	-9.9
10.241805	14.7	43.0	28.3	1000.0	9.000	-10.0

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.357000	15.1	32.5	17.4	1000.0	9.000	-1.4
0.397500	17.8	31.7	13.9	1000.0	9.000	-2.1
0.717000	10.4	30.0	19.6	1000.0	9.000	-5.1
0.999998	7.2	30.0	22.8	1000.0	9.000	-6.9
9.216435	6.5	30.0	23.5	1000.0	9.000	-9.9
10.241805	12.8	30.0	17.2	1000.0	9.000	-10.0

Note:
1. Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.
2. The test configurations of TC7-TC8 were tested, and the worse test result was supplied.

10.2.11 SYNC Port Test Data of TC7

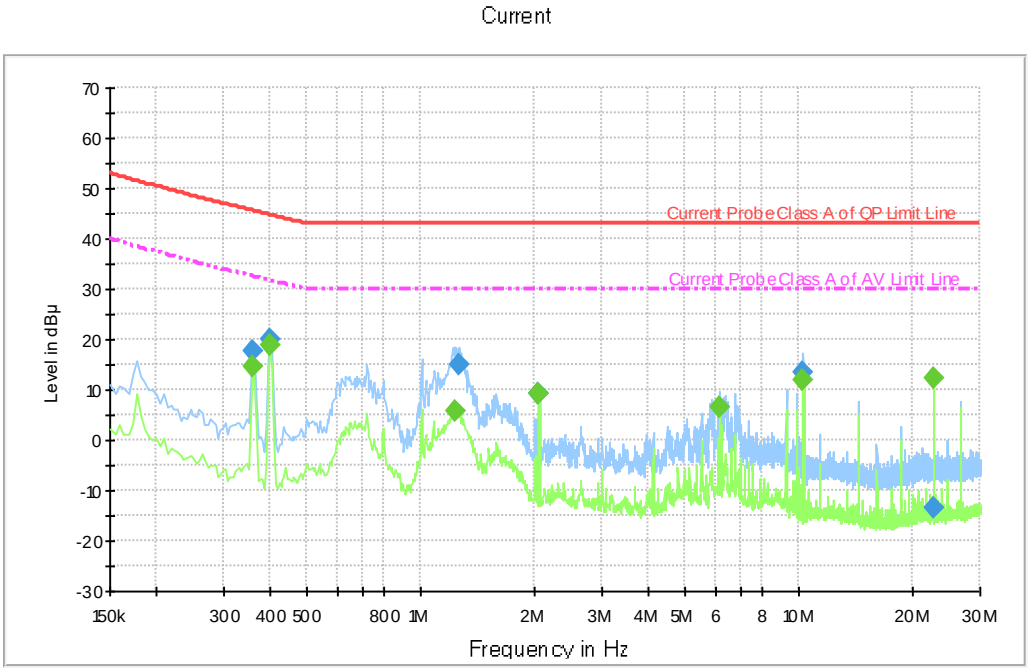

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.357000	17.6	45.6	28.0	1000.0	9.000	-1.4
0.397500	20.2	44.7	24.6	1000.0	9.000	-2.1
1.259692	14.9	43.0	28.1	1000.0	9.000	-7.4
2.047755	9.3	43.0	33.7	1000.0	9.000	-8.5
10.237305	13.6	43.0	29.4	1000.0	9.000	-10.0
22.600358	-13.4	43.0	56.4	1000.0	9.000	-9.8

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.357000	14.5	32.5	18.0	1000.0	9.000	-1.4
0.397500	19.0	31.7	12.7	1000.0	9.000	-2.1
1.223872	5.9	30.0	24.1	1000.0	9.000	-7.4
2.047755	9.1	30.0	20.9	1000.0	9.000	-8.5
6.144780	6.6	30.0	23.4	1000.0	9.000	-9.4
10.237305	12.1	30.0	17.9	1000.0	9.000	-10.0

Note:
Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.

10.2.12 PHONE Port Test Data of TC7

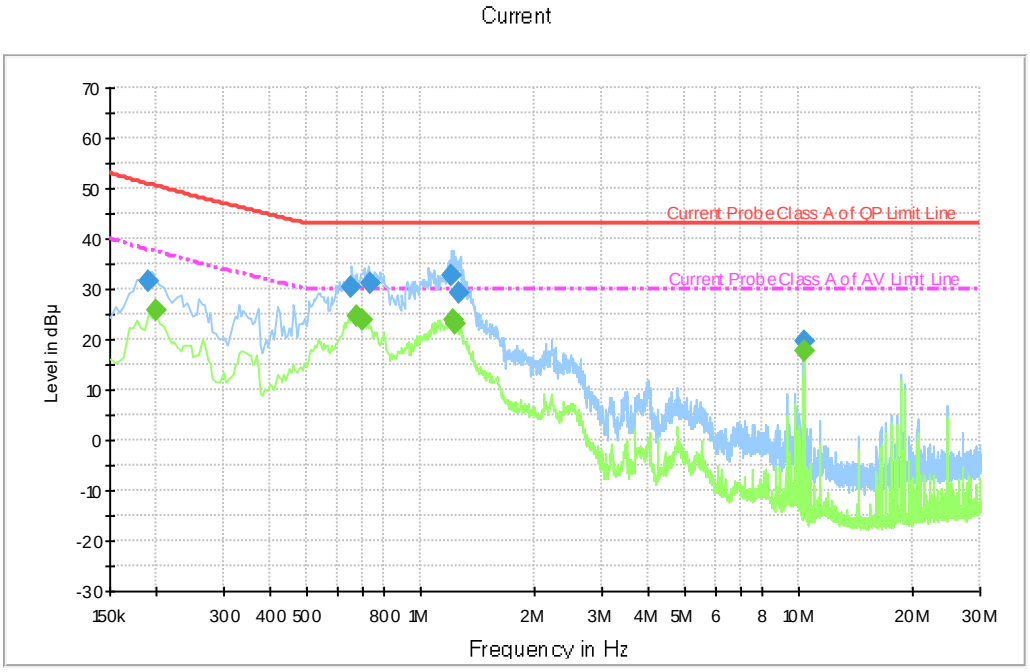

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.190500	31.6	50.8	19.2	1000.0	9.000	3.3
0.654000	30.5	43.0	12.5	1000.0	9.000	-4.6
0.735000	31.3	43.0	11.7	1000.0	9.000	-5.2
1.197008	32.6	43.0	10.4	1000.0	9.000	-7.3
1.264170	29.2	43.0	13.8	1000.0	9.000	-7.4
10.241782	19.6	43.0	23.4	1000.0	9.000	-10.0

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.199500	25.8	37.4	11.5	1000.0	9.000	2.9
0.676500	24.7	30.0	5.3	1000.0	9.000	-4.8
0.699000	23.8	30.0	6.2	1000.0	9.000	-4.9
1.210440	24.0	30.0	6.0	1000.0	9.000	-7.3
1.232805	23.3	30.0	6.7	1000.0	9.000	-7.4
10.241782	17.8	30.0	12.2	1000.0	9.000	-10.0

Note:
Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.

10.2.13 MON Port Test Data of TC8

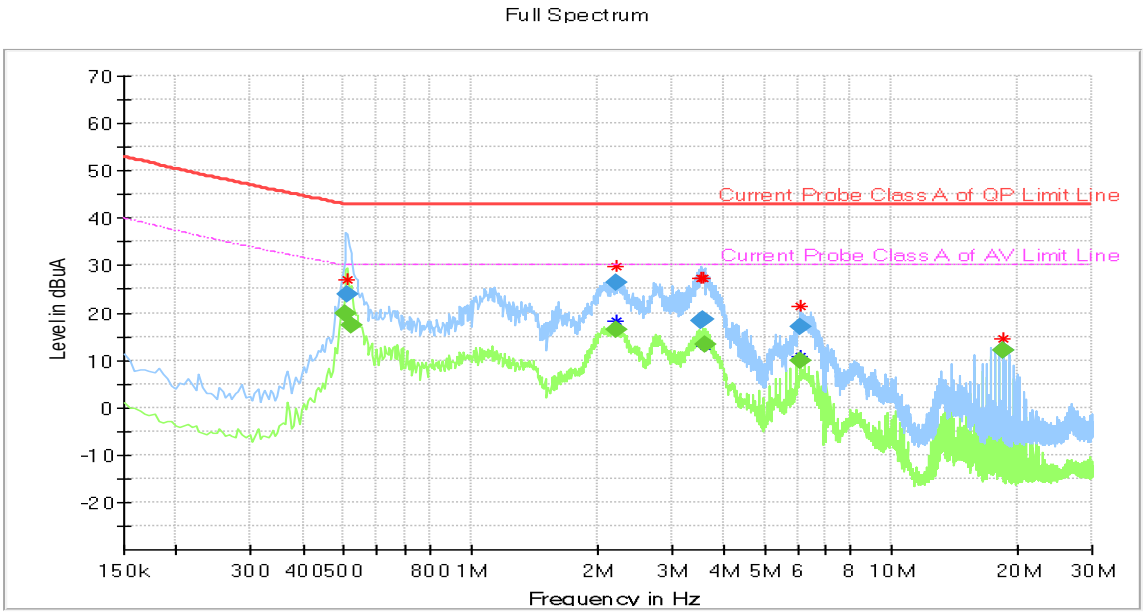

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.509999	23.79	43.00	19.21	1000.0	9.000	-4.2
2.231355	26.41	43.00	16.59	1000.0	9.000	-9.5
3.529785	18.22	43.00	24.78	1000.0	9.000	-9.8
3.588038	18.66	43.00	24.34	1000.0	9.000	-9.8
6.068662	16.91	43.00	26.09	1000.0	9.000	-9.9
18.341738	12.21	43.00	30.79	1000.0	9.000	-9.9

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.505499	19.92	30.00	10.08	1000.0	9.000	-4.1
0.519000	17.41	30.00	12.59	1000.0	9.000	-4.3
2.226578	16.37	30.00	13.63	1000.0	9.000	-9.5
3.606038	13.30	30.00	16.70	1000.0	9.000	-9.8
6.068640	9.94	30.00	20.06	1000.0	9.000	-9.9
18.346238	11.92	30.00	18.08	1000.0	9.000	-9.9

Note:
Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.

10.2.14 CLK Port Test Data of TC8

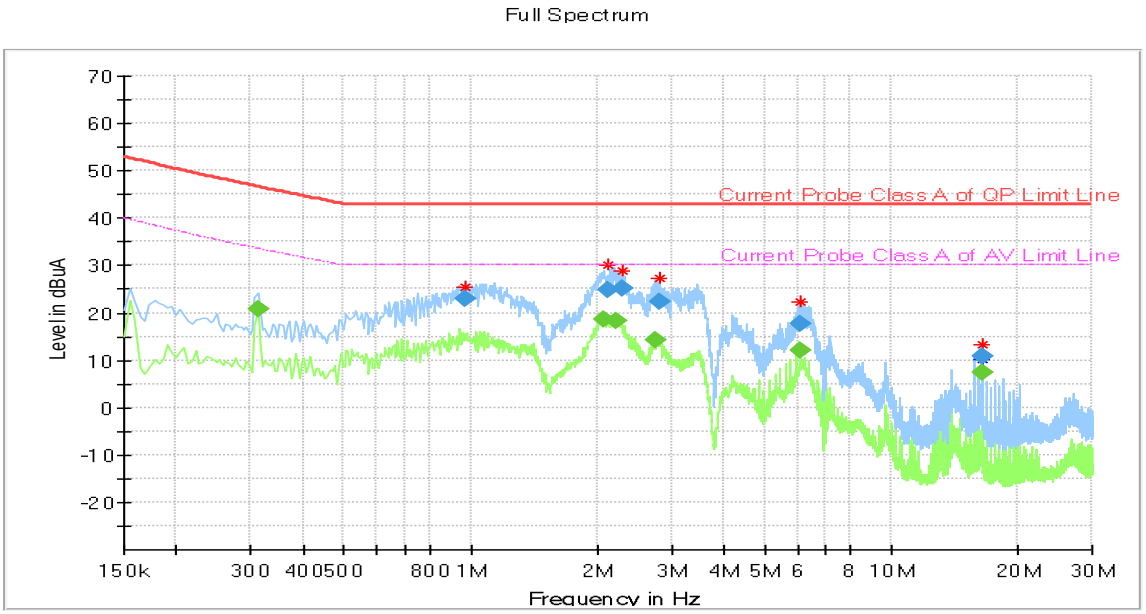

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.973155	23.00	43.00	20.00	1000.0	9.000	-7.7
2.132782	24.96	43.00	18.04	1000.0	9.000	-9.4
2.289893	25.13	43.00	17.87	1000.0	9.000	-9.5
2.808952	22.24	43.00	20.76	1000.0	9.000	-9.6
6.073162	17.75	43.00	25.25	1000.0	9.000	-9.9
16.470142	10.92	43.00	32.08	1000.0	9.000	-10.0

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµA)	Limit (dBµA)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.312000	20.78	33.58	12.80	1000.0	9.000	-0.8
2.070165	18.73	30.00	11.27	1000.0	9.000	-9.4
2.231332	18.17	30.00	11.83	1000.0	9.000	-9.5
2.764110	14.39	30.00	15.61	1000.0	9.000	-9.6
6.068640	12.10	30.00	17.90	1000.0	9.000	-9.9
16.474642	7.50	30.00	22.50	1000.0	9.000	-10.0

Note:
Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.

10.2.15 AC Power Port Test Data for TC4 & TC8

For AC 230V:

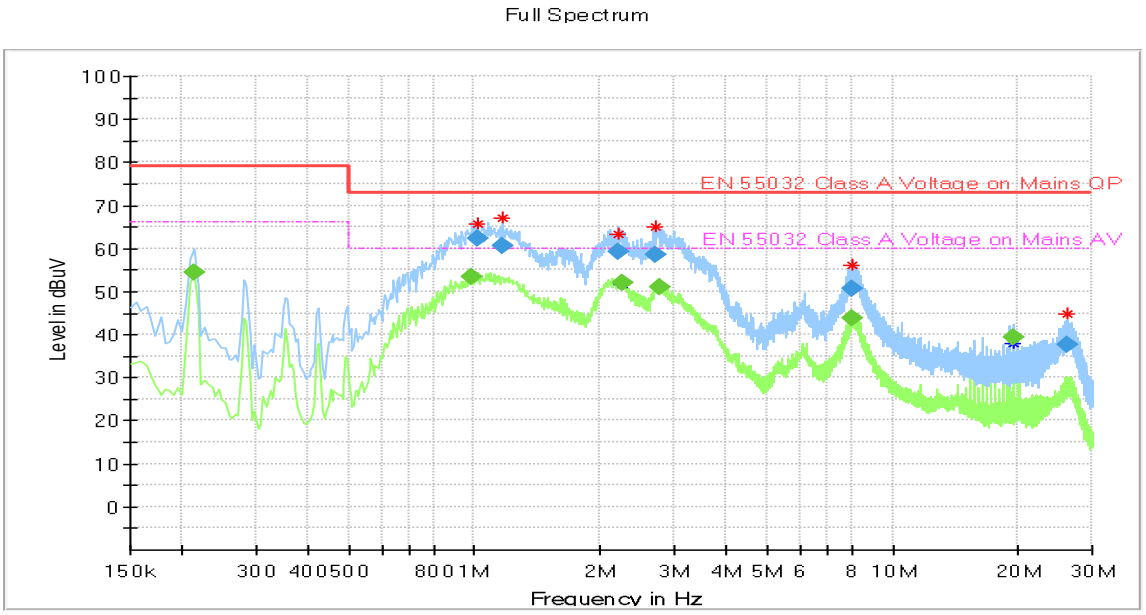

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
1.018500	62.24	73.00	10.76	1000.0	9.000	L2	10.1
1.167000	60.56	73.00	12.44	1000.0	9.000	L2	10.1
2.215500	59.33	73.00	13.67	1000.0	9.000	L2	10.1
2.710500	58.48	73.00	14.52	1000.0	9.000	L1	10.1
8.011500	50.77	73.00	22.23	1000.0	9.000	L2	10.2
26.250000	37.49	73.00	35.51	1000.0	9.000	L2	11.5

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.213000	54.52	66.00	11.48	1000.0	9.000	L2	10.2
0.987000	53.30	60.00	6.70	1000.0	9.000	L2	10.1
2.269500	51.99	60.00	8.01	1000.0	9.000	L2	10.1
2.769000	51.09	60.00	8.91	1000.0	9.000	L2	10.1
8.043000	43.90	60.00	16.10	1000.0	9.000	L2	10.2
19.473000	39.19	60.00	20.81	1000.0	9.000	L2	10.9

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC4&TC8 were tested, and the worse test result was supplied.

For AC 110V:

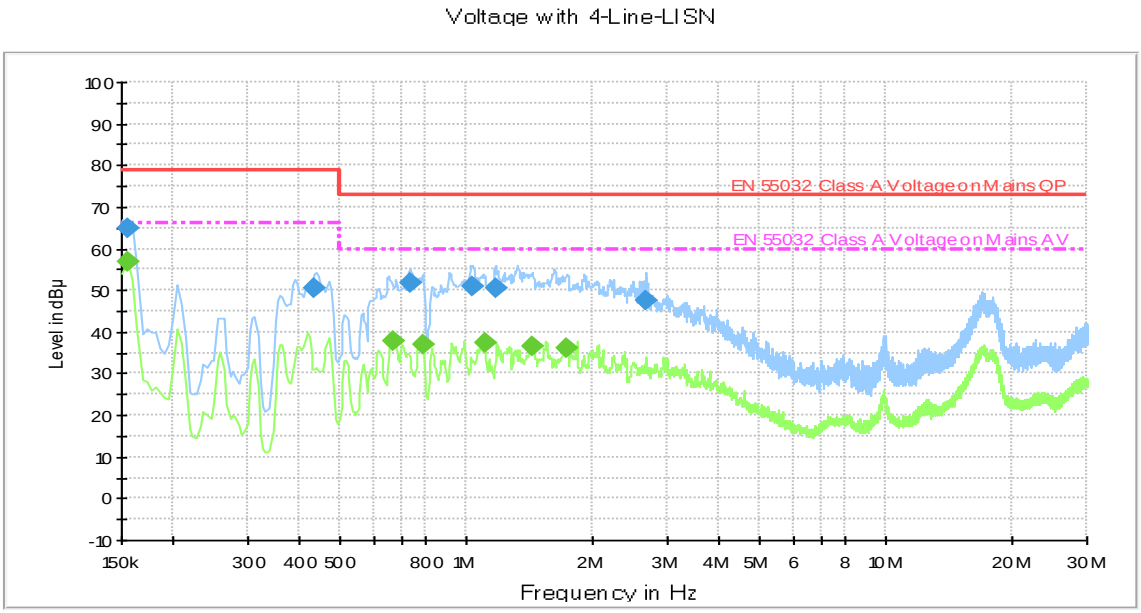

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	65.0	79.0	14.0	1000.0	9.000	L2	10.4
0.433500	50.3	79.0	28.7	1000.0	9.000	L2	10.1
0.730500	51.7	73.0	21.3	1000.0	9.000	L2	10.1
1.032000	50.8	73.0	22.2	1000.0	9.000	L2	10.1
1.167000	50.4	73.0	22.6	1000.0	9.000	L1	10.1
2.665500	47.4	73.0	25.6	1000.0	9.000	L2	10.1

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	56.8	66.0	9.2	1000.0	9.000	L2	10.4
0.663000	37.6	60.0	22.4	1000.0	9.000	L2	10.1
0.784500	37.1	60.0	22.9	1000.0	9.000	L2	10.1
1.099500	37.6	60.0	22.4	1000.0	9.000	L2	10.1
1.423500	36.5	60.0	23.5	1000.0	9.000	L2	10.1
1.725000	36.0	60.0	24.0	1000.0	9.000	L2	10.1

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC4&TC8 were tested, and the worse test result was supplied.

10.2.16 DC Power Port Test Data for TC1-TC3

For DC -48V:

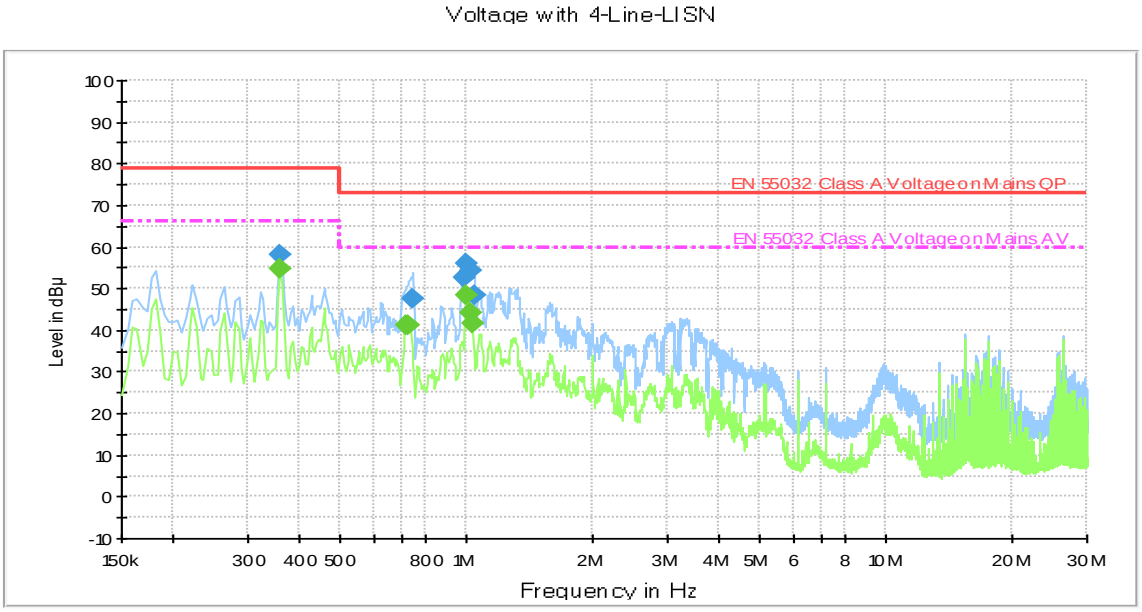

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.357000	58.1	79.0	20.9	1000.0	9.000	L1	10.2
0.744000	47.5	73.0	25.5	1000.0	9.000	L2	10.1
0.978000	52.6	73.0	20.4	1000.0	9.000	L2	10.1
0.996000	55.8	73.0	17.2	1000.0	9.000	L2	10.1
1.014000	54.2	73.0	18.8	1000.0	9.000	L2	10.1
1.041000	48.6	73.0	24.4	1000.0	9.000	L1	10.1

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.357000	54.6	66.0	11.4	1000.0	9.000	L1	10.2
0.717000	41.4	60.0	18.6	1000.0	9.000	L2	10.1
0.726000	41.3	60.0	18.7	1000.0	9.000	L1	10.1
0.996000	48.5	60.0	11.5	1000.0	9.000	L2	10.1
1.014000	43.9	60.0	16.1	1000.0	9.000	L2	10.1
1.027500	41.5	60.0	18.5	1000.0	9.000	L1	10.1

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC1-TC3 were tested, and the worst test result was supplied

10.2.17 HVDC Power Port Test Data for TC4 & TC8

For HVDC 240V:

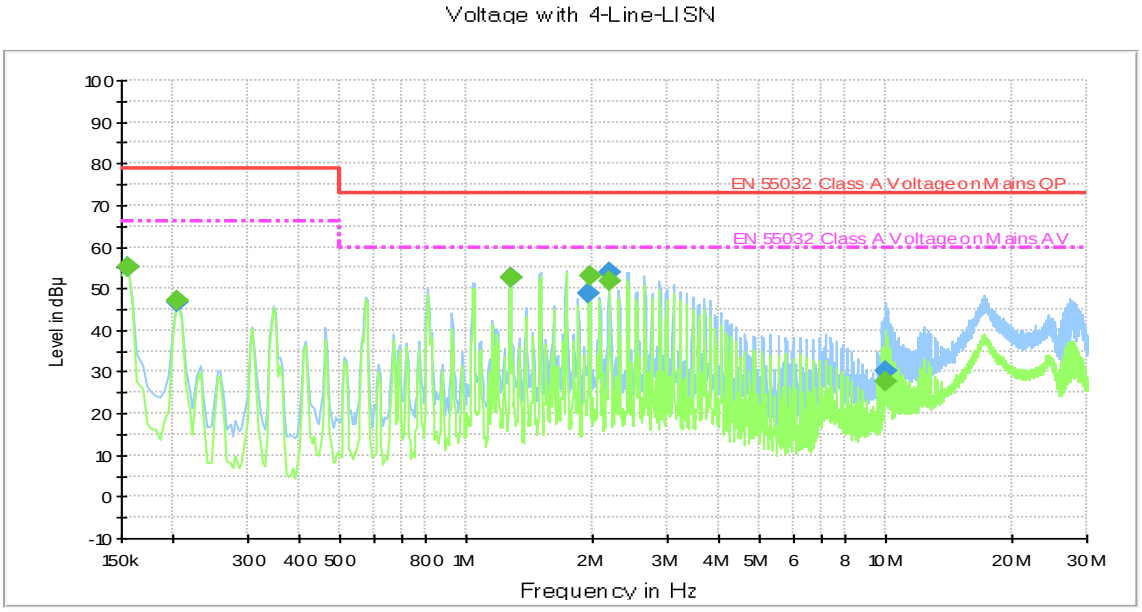

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	55.3	79.0	23.7	1000.0	9.000	L2	10.4
0.204000	46.7	79.0	32.3	1000.0	9.000	L1	10.3
1.266000	52.8	73.0	20.2	1000.0	9.000	L2	10.1
1.950000	48.7	73.0	24.3	1000.0	9.000	L1	10.1
2.188500	54.0	73.0	19.0	1000.0	9.000	L2	10.1
9.978000	30.2	73.0	42.8	1000.0	9.000	L1	10.3

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	55.3	66.0	10.7	1000.0	9.000	L2	10.4
0.204000	47.1	66.0	18.9	1000.0	9.000	L1	10.3
1.266000	52.7	60.0	7.3	1000.0	9.000	L2	10.1
1.954500	52.8	60.0	7.2	1000.0	9.000	L1	10.1
2.184000	51.9	60.0	8.1	1000.0	9.000	L1	10.1
9.991500	27.5	60.0	32.5	1000.0	9.000	L1	10.3

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)

Level= Reading level+ Corr. (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.

2. The test configurations of TC4&TC8 were tested, and the worse test result was supplied.

10.2.18 DC Power Port Test Data for TC5-TC7&TC9

For DC -48V:

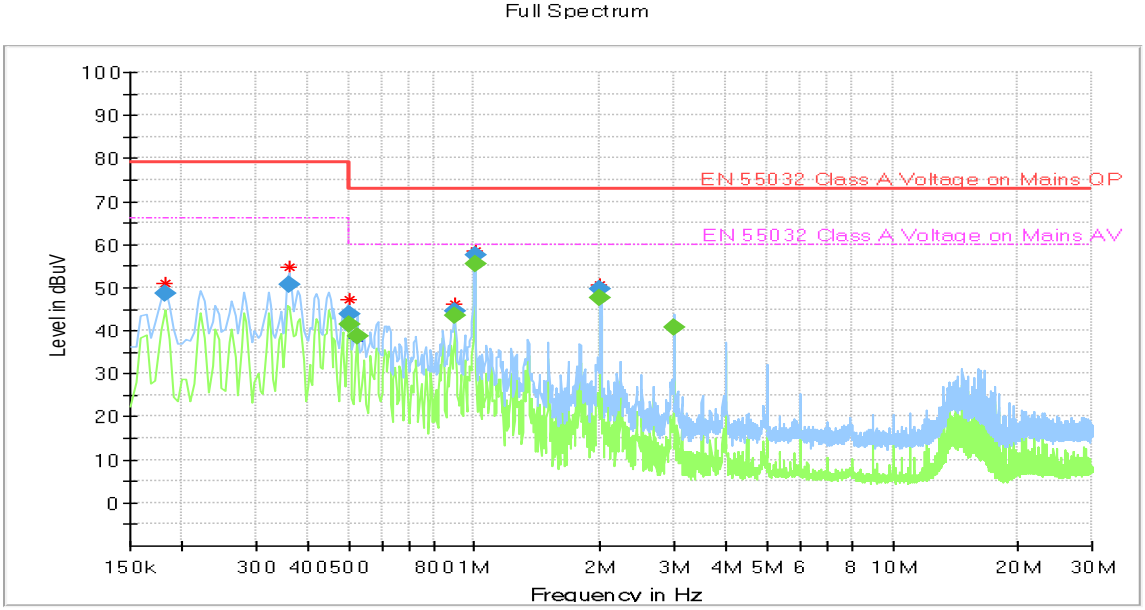

Measurement Result: QP Detector

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.181500	48.70	79.00	30.30	1000.0	9.000	L1	10.3
0.361500	50.62	79.00	28.38	1000.0	9.000	L1	10.1
0.501000	43.71	73.00	29.29	1000.0	9.000	L2	10.1
0.897000	44.45	73.00	28.55	1000.0	9.000	L2	10.1
1.000500	57.47	73.00	15.53	1000.0	9.000	L1	10.1
1.999500	49.76	73.00	23.24	1000.0	9.000	L1	10.1

Measurement Result: AV Detector

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.501000	41.42	60.00	18.58	1000.0	9.000	L2	10.1
0.523500	38.54	60.00	21.46	1000.0	9.000	L2	10.1
0.897000	43.51	60.00	16.49	1000.0	9.000	L2	10.1
1.000500	55.33	60.00	4.67	1000.0	9.000	L1	10.1
1.999500	47.67	60.00	12.33	1000.0	9.000	L1	10.1
2.998500	40.63	60.00	19.37	1000.0	9.000	L1	10.1

Note:

1. Margin=Limit- Level (QuasiPeak /CAverage)
Level= Reading level+ Corr. (cable loss + correction factor)
The reading level is used to calculate by software which is not shown in the sheet.
2. The test configurations of TC5-TC7&TC9 were tested, and the worst test result was supplied.

10.3 Current Harmonics

10.3.1 Test Data of Harmonic Current for TC4&TC8

Voltage/ Frequency	230 V / 50 Hz

Average harmonic current results

Hn	Ieff [A]	Ieff [%]	Limit [A]	Result
1	1.907			
2	1.132E-3	0.105	1.08	Pass
3	200.165E-3	8.703	2.30	Pass
4	1.106E-3	0.257	430.00E-3	Pass
5	88.333E-3	7.749	1.14	Pass
6	1.293E-3	0.431	300.00E-3	Pass
7	56.570E-3	7.347	770.00E-3	Pass
8	926.406E-6	0.403	230.00E-3	Pass
9	45.248E-3	11.312	400.00E-3	Pass
10	771.917E-6	0.420	184.00E-3	Pass
11	16.996E-3	5.150	330.00E-3	Pass
12	906.171E-6	0.591	153.33E-3	Pass
13	37.564E-3	17.888	210.00E-3	Pass
14	561.469E-6	0.427	131.43E-3	Pass
15	41.398E-3	27.599	150.00E-3	Pass
16	1.268E-3	1.102	115.00E-3	Pass
17	31.919E-3	24.117	132.35E-3	Pass
18	1.400E-3	1.369	102.22E-3	Pass
19	35.150E-3	29.683	118.42E-3	Pass
20	1.007E-3	1.095	92.00E-3	Pass
21	32.113E-3	19.982	160.71E-3	Pass
22	443.082E-6	0.530	83.64E-3	Pass
23	14.192E-3	9.671	146.74E-3	Pass
24	515.981E-6	0.673	76.66E-3	Pass
25	15.095E-3	11.181	135.00E-3	Pass
26	556.041E-6	0.786	70.77E-3	Pass
27	15.221E-3	12.177	124.99E-3	Pass
28	498.559E-6	0.759	65.71E-3	Pass
29	13.609E-3	11.693	116.39E-3	Pass
30	1.181E-3	1.925	61.33E-3	Pass
31	25.881E-3	23.773	108.87E-3	Pass
32	1.099E-3	1.911	57.50E-3	Pass
33	26.210E-3	25.628	102.27E-3	Pass
34	992.588E-6	1.834	54.12E-3	Pass
35	16.886E-3	17.510	96.44E-3	Pass
36	678.473E-6	1.327	51.11E-3	Pass
37	21.597E-3	23.677	91.21E-3	Pass
38	778.643E-6	1.608	48.42E-3	Pass
39	27.538E-3	31.823	86.53E-3	Pass
40	703.372E-6	1.529	46.00E-3	Pass

Maximum harmonic current results

Hn	Ieff [A]	Ieff [%]	Limit [A]	Result
1	1.910			
2	1.272E-3	0.079	1.62	Pass
3	200.413E-3	5.809	3.45	Pass
4	1.231E-3	0.191	645.00E-3	Pass
5	88.551E-3	5.178	1.71	Pass
6	1.388E-3	0.309	450.00E-3	Pass
7	56.825E-3	4.920	1.15	Pass
8	1.015E-3	0.294	345.00E-3	Pass
9	45.374E-3	7.562	600.00E-3	Pass
10	879.329E-6	0.319	276.00E-3	Pass
11	17.186E-3	3.472	495.00E-3	Pass
12	1.030E-3	0.448	229.99E-3	Pass
13	37.738E-3	11.980	315.00E-3	Pass
14	662.362E-6	0.336	197.15E-3	Pass
15	41.584E-3	18.482	225.00E-3	Pass
16	1.392E-3	0.807	172.50E-3	Pass
17	32.080E-3	16.159	198.52E-3	Pass
18	1.526E-3	0.995	153.33E-3	Pass
19	35.467E-3	19.967	177.63E-3	Pass
20	1.168E-3	0.847	138.00E-3	Pass
21	32.412E-3	20.168	160.71E-3	Pass
22	592.801E-6	0.473	125.46E-3	Pass
23	14.382E-3	9.801	146.74E-3	Pass
24	688.188E-6	0.598	114.99E-3	Pass
25	15.323E-3	11.350	135.00E-3	Pass
26	700.909E-6	0.660	106.16E-3	Pass
27	15.519E-3	12.416	124.99E-3	Pass
28	642.090E-6	0.651	98.57E-3	Pass
29	13.921E-3	11.961	116.39E-3	Pass
30	1.425E-3	1.549	92.00E-3	Pass
31	26.136E-3	24.007	108.87E-3	Pass
32	1.305E-3	1.513	86.25E-3	Pass
33	26.593E-3	26.002	102.27E-3	Pass
34	1.171E-3	1.443	81.18E-3	Pass
35	17.189E-3	17.825	96.44E-3	Pass
36	885.909E-6	1.156	76.66E-3	Pass
37	21.956E-3	24.071	91.21E-3	Pass
38	1.066E-3	1.468	72.63E-3	Pass
39	27.903E-3	32.245	86.53E-3	Pass
40	930.554E-6	1.349	69.00E-3	Pass

Note: The test configurations of TC4&TC8 were tested, and the worse test result was supplied.

10.4 Voltage Fluctuation and Flicker

10.4.1 Test Data of Voltage Fluctuation and Flicker for TC4&TC8

Voltage/ Frequency	230 V / 50 Hz
Short time (Pst)	10 min
Observation time	120 min (12 Flicker measurements)

Maximum Flicker Results

	EUT values	Limit	Result
Pst	0.028	1.00	Pass
Plt	0.028	0.65	Pass
dc [%]	0.000	3.30	Pass
dmax [%]	0.036	4.00	Pass
dt [s]	0.000	0.50	Pass

Note: The test configurations of TC4 & TC8 were tested, and the worse test result was supplied.

11 Photographs of Test Set-up

11.1 Emission

Radiated emission for 30 MHz to 1 GHz

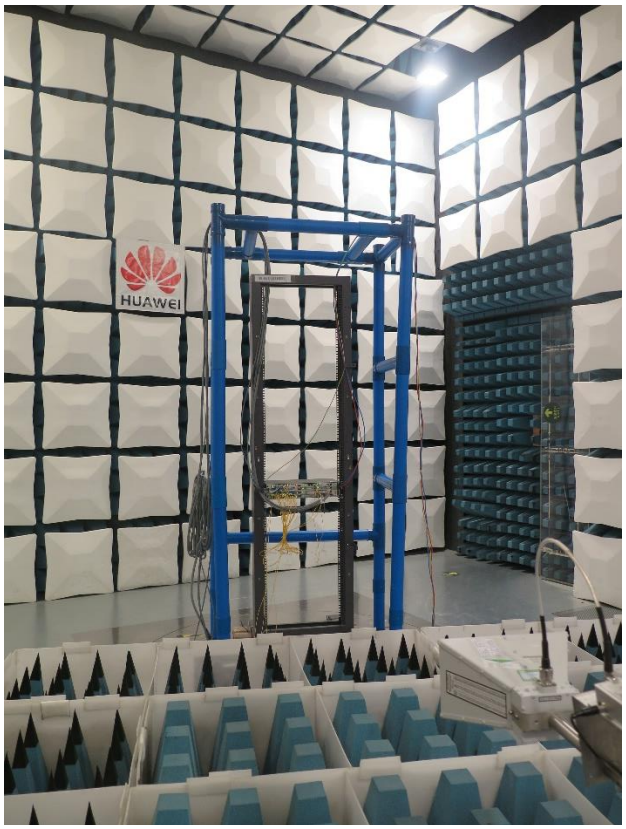

Radiated emission for 1 GHz to 6 GHz

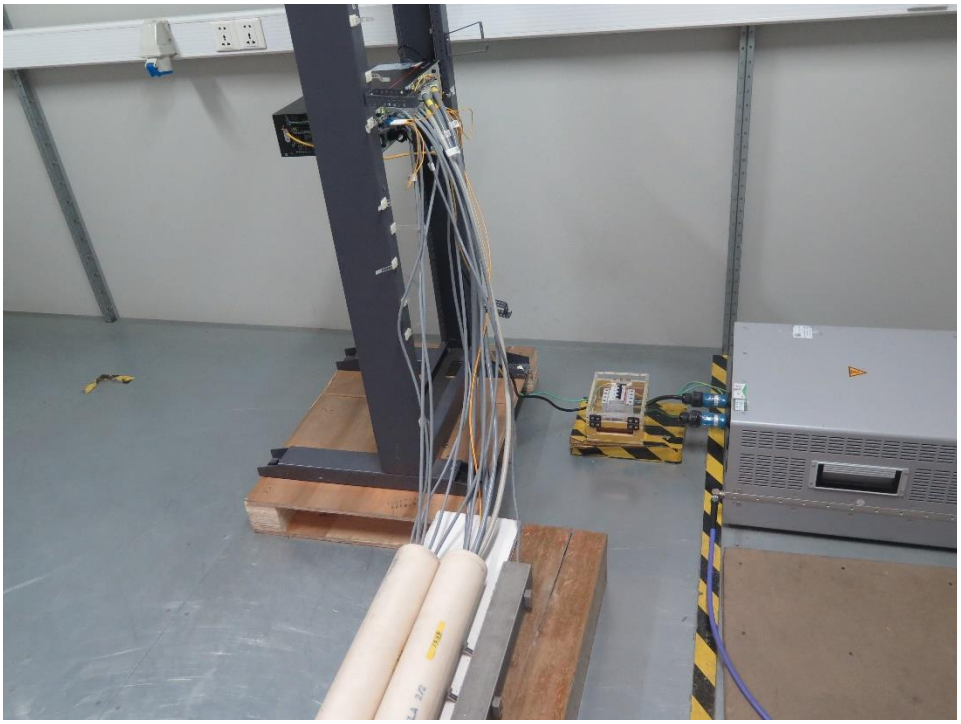

Conducted emissions of AC power port

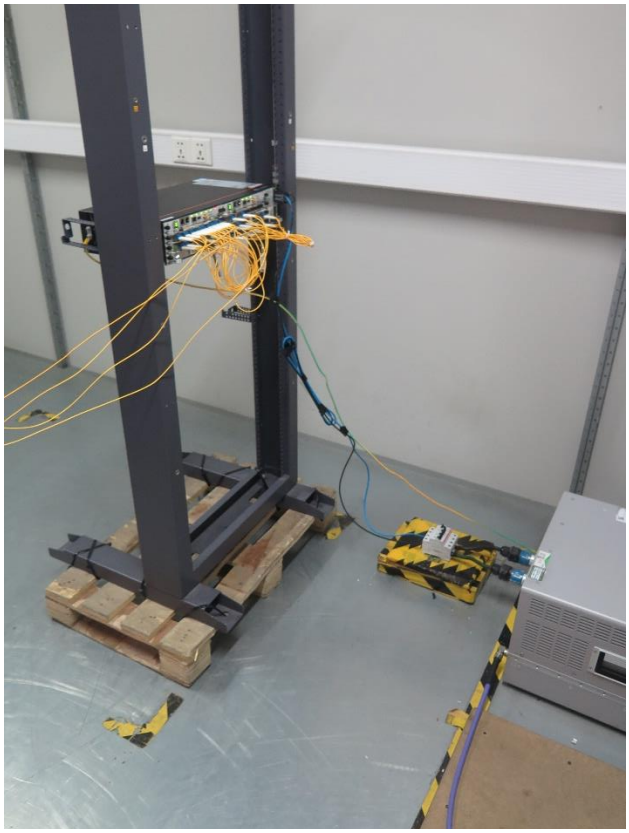

Conducted emissions of DC power port

Conducted emissions of wired network port

Current harmonics and voltage fluctuations (flicker)

11.2 Immunity

Electrostatic discharge

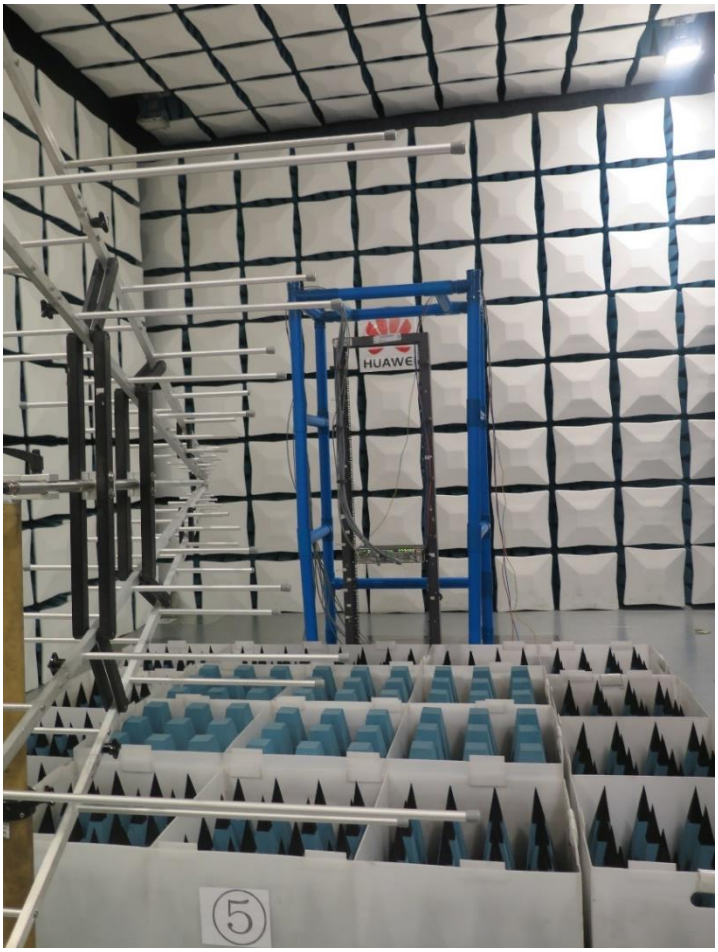

Immunity to radiated electric fields for 80 MHz to 1000 MHz

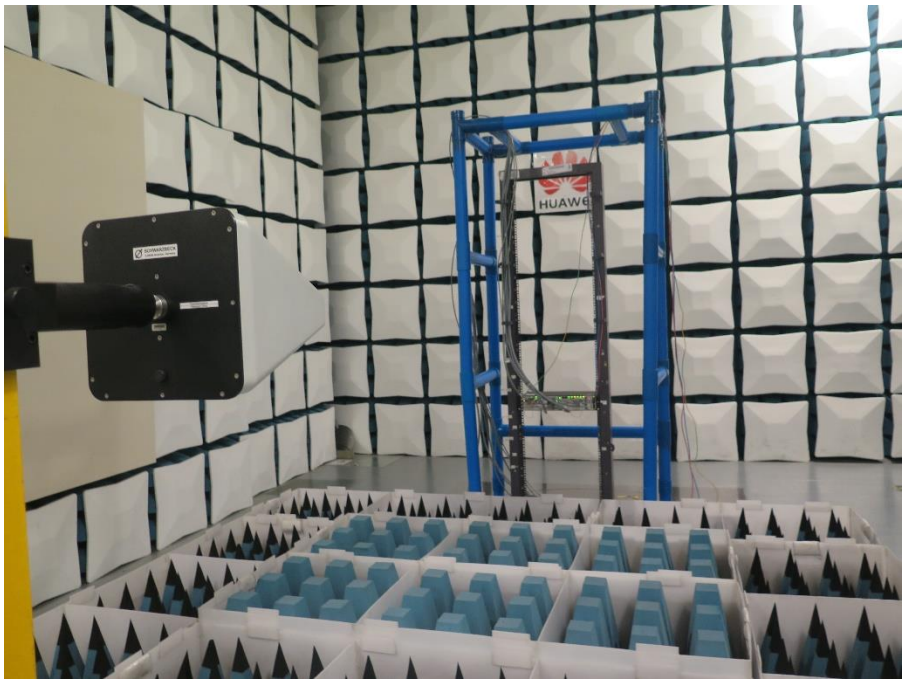

Immunity to radiated electric fields for 1000 MHz to 6000 MHz

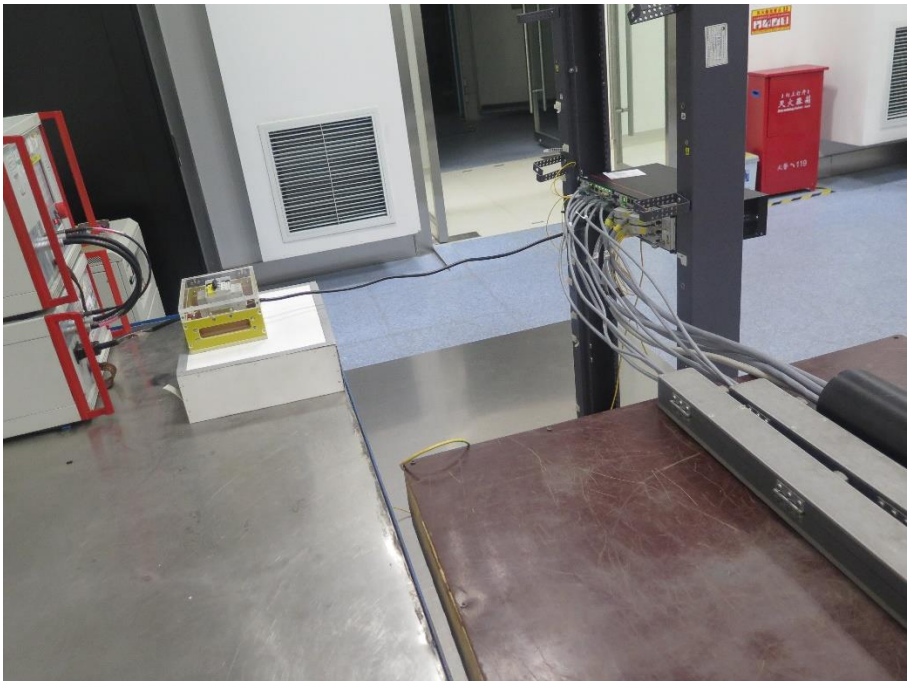

Immunity to electrical fast transient bursts of power port

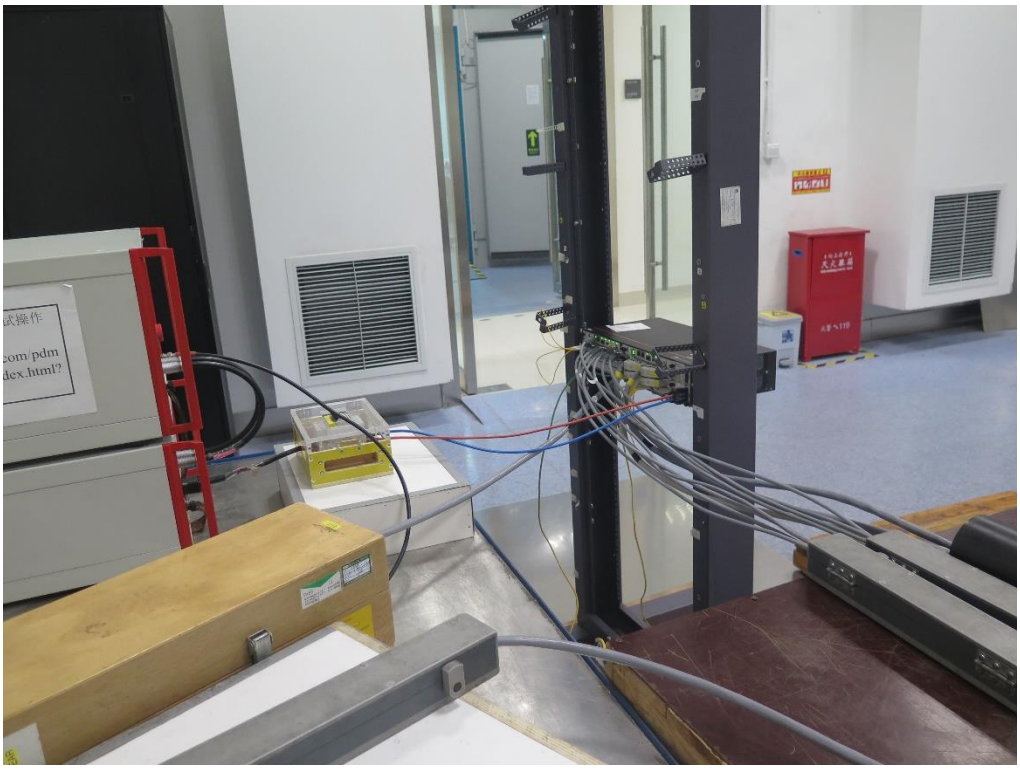

Immunity to electrical fast transient bursts of signal port

Immunity to surges of power port

Immunity to surges of signal port

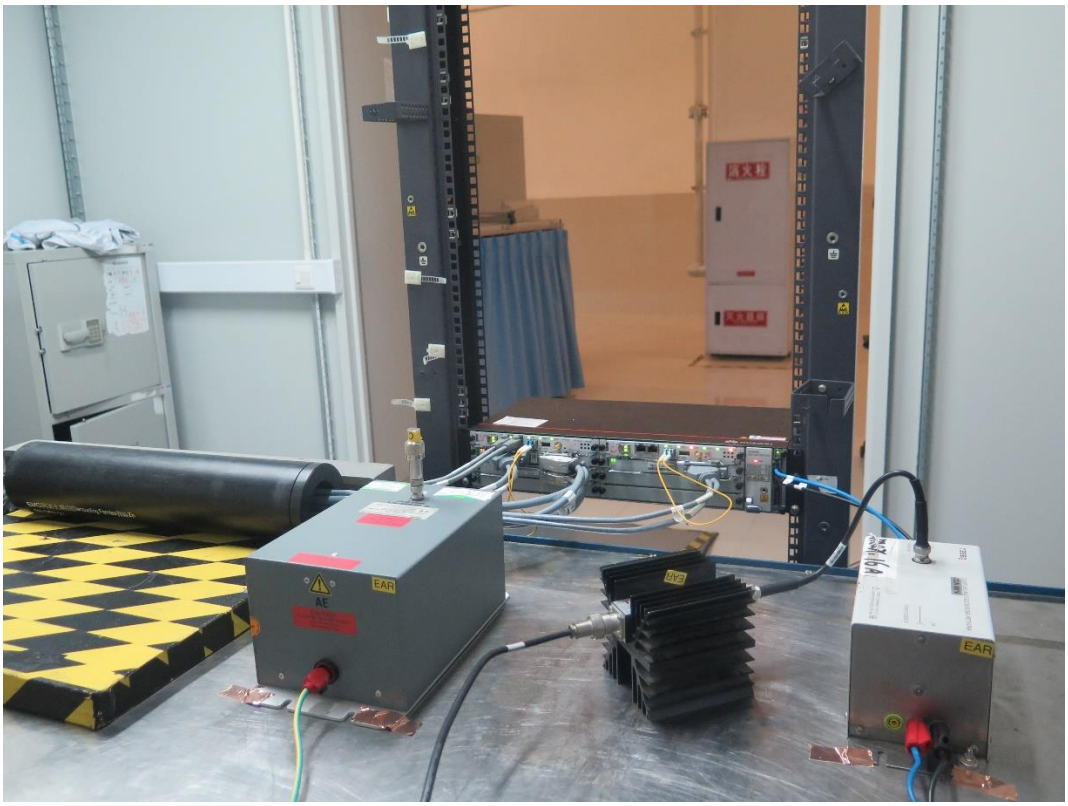

Immunity to continuous conducted interference of power port

Immunity to continuous conducted interference of signal port

Immunity to voltage dips, short interruption of AC power port

Immunity to voltage dips, short interruption and voltage variation of DC power port

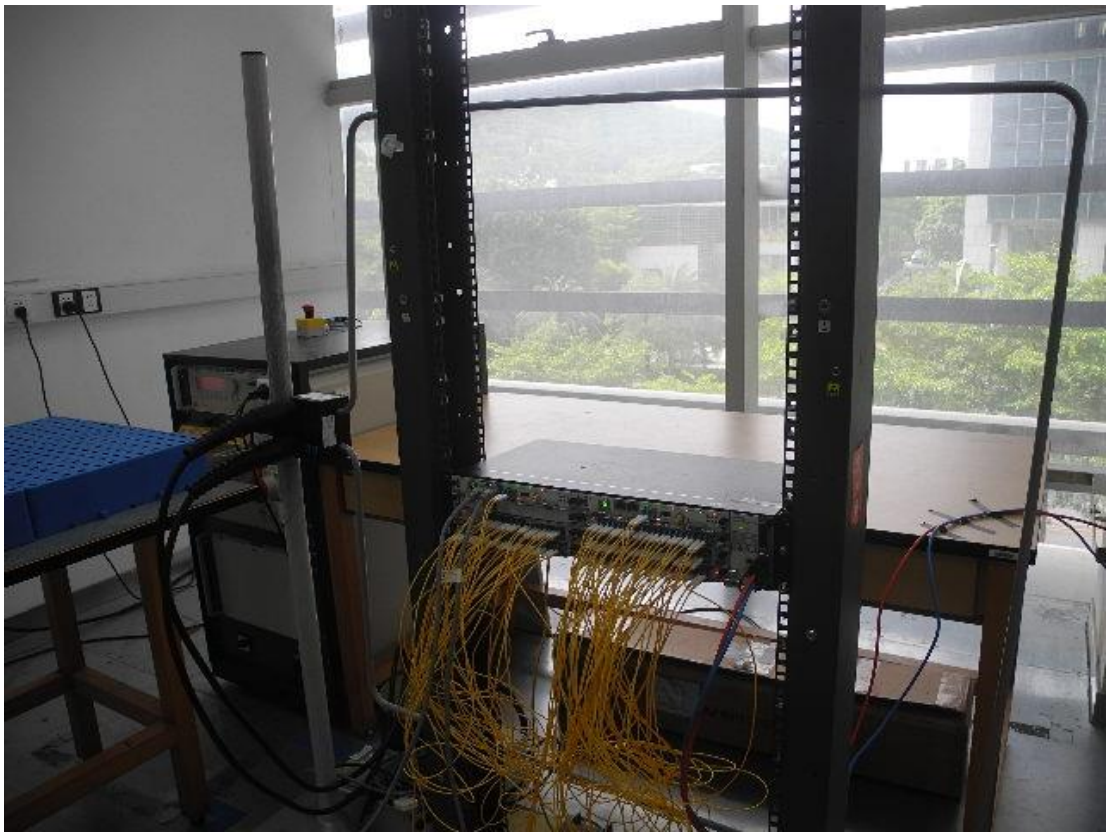

Immunity to power frequency magnetic field

Appendix: Abbreviation

Table 34 Abbreviation

Abbreviation	Full Name
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
EMS	Electromagnetic Susceptibility
ESD	Electrostatic Discharge
EUT	Equipment Under Test
AE	Auxiliary Equipment
AC	Alternating Current
DC	Direct Current
NSA	Normalized Site Attenuation
S_{VSWR}	Site Voltage Standing Wave Ratio
LISN	Line Impedance Stabilization Network
CDN	Coupling and Decoupling Network
TC	Test Configuration
NT	Not Test
N/A	Not Applicable
RMS	Root Mean Square

END